




# OIL ANALYSIS REPORT

Sample Rating Trend

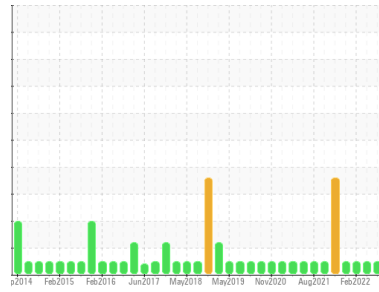

**NORMAL**



Area  
**GFL035**  
 Machine Id  
**10329**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (56 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0116461</b>	GFL0053183	GFL0045250	
Sample Date	Client Info	<b>22 Mar 2024</b>	14 Feb 2023	22 Feb 2022	
Machine Age	hrs	Client Info	<b>91434</b>	91434	18867
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>70</b>	46	40
Chromium	ppm ASTM D5185m >20	<b>3</b>	2	2
Nickel	ppm ASTM D5185m >2	<b>1</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185m >20	<b>11</b>	12	8
Lead	ppm ASTM D5185m >40	<b>0</b>	1	<1
Copper	ppm ASTM D5185m >330	<b>2</b>	2	2
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Antimony	ppm ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	5	14
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>65</b>	67	57
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>950</b>	845	913
Calcium	ppm ASTM D5185m 1070	<b>1159</b>	1455	1414
Phosphorus	ppm ASTM D5185m 1150	<b>1049</b>	1072	1116
Zinc	ppm ASTM D5185m 1270	<b>1294</b>	1409	1437
Sulfur	ppm ASTM D5185m 2060	<b>3534</b>	3664	2827

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>18</b>	13	11
Sodium	ppm ASTM D5185m	<b>36</b>	10	19
Potassium	ppm ASTM D5185m >20	<b>22</b>	4	4

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>2.2</b>	0.5	2.5
Nitration	Abs/cm *ASTM D7624 >20	<b>11.7</b>	7.2	13.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.3</b>	19.4	27.0


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.5</b>	14.6	21.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.8</b>	8.8	9.2




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

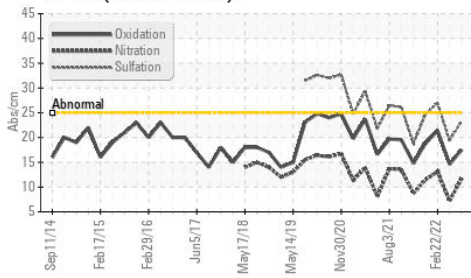

Base Number

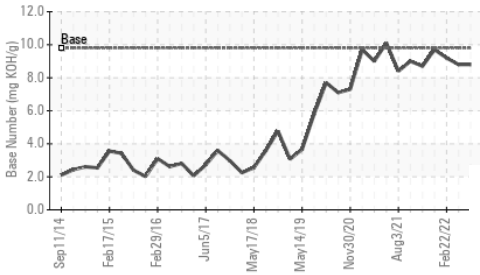

Viscosity @ 100°C

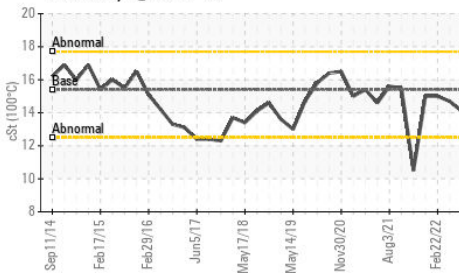


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.7

## GRAPHS


Ferrous Alloys

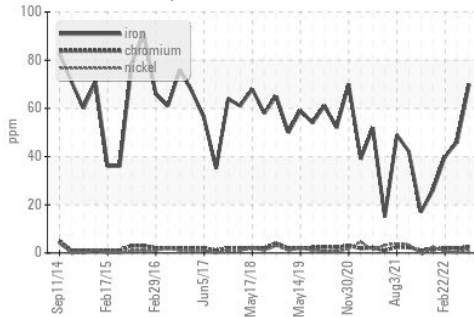


Non-ferrous Metals

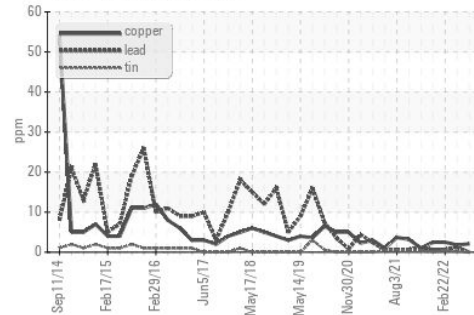

Viscosity @ 100°C

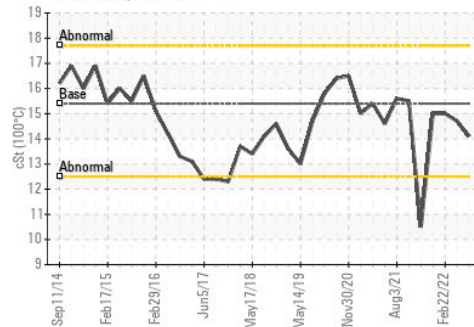

Base Number

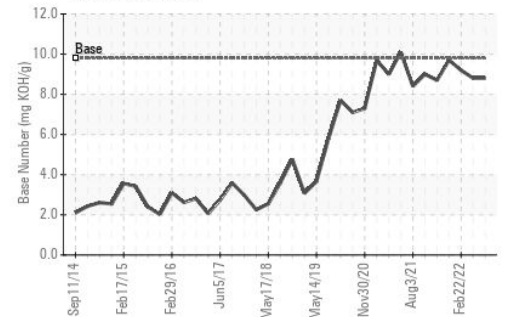

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0116461  
 Lab Number : 06137260  
 Unique Number : 10956725  
 Test Package : FLEET

Received : 03 Apr 2024  
 Tested : 04 Apr 2024  
 Diagnosed : 05 Apr 2024 - Don Baldrige

GFL Environmental - 035 - Greensboro  
 1236 Elon Place  
 High Point, NC  
 US 27263  
 Contact: JORGE COSTA  
 jorge.costa@gflenv.com  
 T: (336)668-3712  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)