


OIL ANALYSIS REPORT





Area CTL Machine Id 72CTL-PACK-S-HYD-ASSY Component Hydraulic System

AW HYDRAULIC OIL ISO 46 (207 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		<u>.</u>		Mar2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0071515		
Sample Date		Client Info		16 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	2		
_ead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	7		
Fin	ppm	ASTM D5185m	>20	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Nolybdenum	ppm	ASTM D5185m	5	0		
Vanganese	ppm	ASTM D5185m		0		
Vagnesium	ppm	ASTM D5185m	25	2		
Calcium	ppm	ASTM D5185m	200	69		
Phosphorus	ppm	ASTM D5185m	300	360		
Zinc	ppm	ASTM D5185m	370	416		
Sulfur	ppm	ASTM D5185m	2500	1333		
CONTAMINAN	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEAN	LINESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1250		
Particles >6µm		ASTM D7647	>1300	192		
Particles >14µm		ASTM D7647	>160	20		
Particles >21µm		ASTM D7647	>40	5		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/11		
FLUID DEGRA	DA <u>TION</u>	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.50		
11:41) Rev: 1	5				Submitted By	ADAM POTTS

Submitted By: ADAM POTTS Page 1 of 2





OIL ANALYSIS REPORT

VISUAL







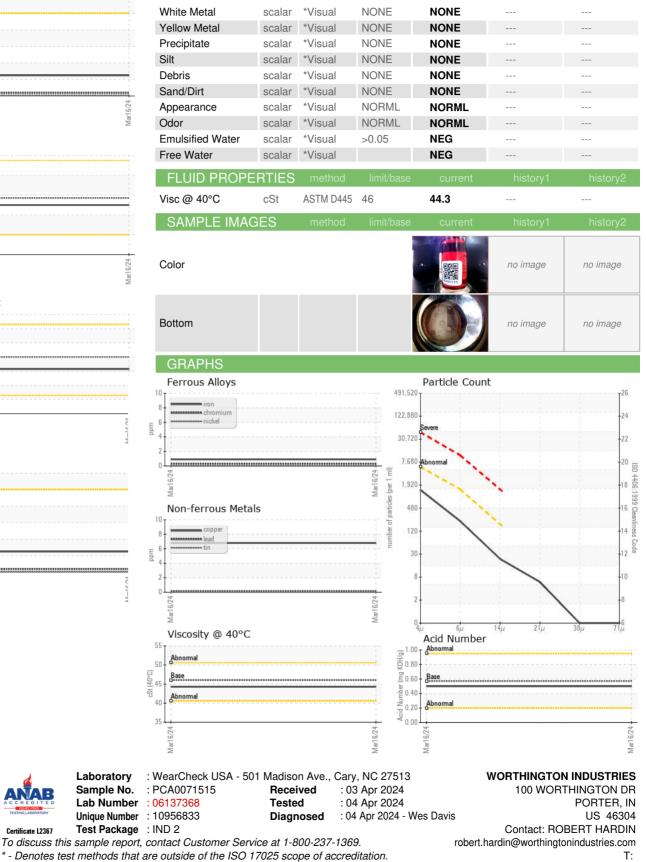

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

춫

Laboratory

Sample No.

F: