


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

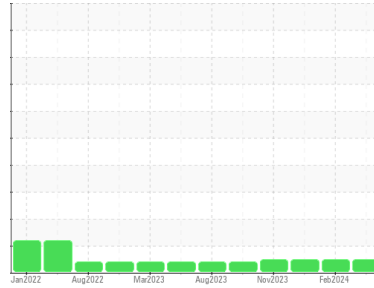

Area  
**G. LOPES CONSTRUCTION INC./ON-ROAD**  
 Machine Id  
**PU298**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>PCA0109900</b>  | PCA0072166  | PCA0109740  |
| Sample Date   | Client Info |             | <b>01 Apr 2024</b> | 21 Feb 2024 | 16 Jan 2024 |
| Machine Age   | hrs         | Client Info | <b>76500</b>       | 74000       | 71500       |
| Oil Age       | hrs         | Client Info | <b>76500</b>       | 74000       | 71500       |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>7</b>     | 6        | 7        |
| Chromium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | 1        | <1       |
| Nickel   | ppm    | ASTM D5185m >4   | <b>0</b>     | <1       | 0        |
| Titanium | ppm    | ASTM D5185m      | <b>0</b>     | <1       | 0        |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | <1       | 0        |
| Aluminum | ppm    | ASTM D5185m >20  | <b>2</b>     | <1       | 1        |
| Lead     | ppm    | ASTM D5185m >40  | <b>0</b>     | <1       | 0        |
| Copper   | ppm    | ASTM D5185m >330 | <b>2</b>     | <1       | <1       |
| Tin      | ppm    | ASTM D5185m >15  | <b>0</b>     | <1       | 0        |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | <1       | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | <1       | 0        |

## ADDITIVES

|            | method | limit/base       | current     | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>3</b>    | 5        | 4        |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>    | 5        | 0        |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>59</b>   | 56       | 59       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>0</b>    | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>987</b>  | 835      | 975      |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1161</b> | 1005     | 1082     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>1076</b> | 896      | 1055     |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1263</b> | 1116     | 1268     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>3834</b> | 3028     | 3196     |

## CONTAMINANTS

|           | method | limit/base      | current      | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>4</b>     | 6        | 5        |
| Sodium    | ppm    | ASTM D5185m     | <b>&lt;1</b> | 0        | <1       |
| Potassium | ppm    | ASTM D5185m >20 | <b>0</b>     | 2        | 0        |




## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.2</b>  | 0.2      | 0.5      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>7.1</b>  | 6.5      | 9.4      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>18.5</b> | 18.2     | 20.5     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>15.3</b> | 14.5     | 16.9     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>9.80</b> | 9.12     | 9.88     |









# OIL ANALYSIS REPORT

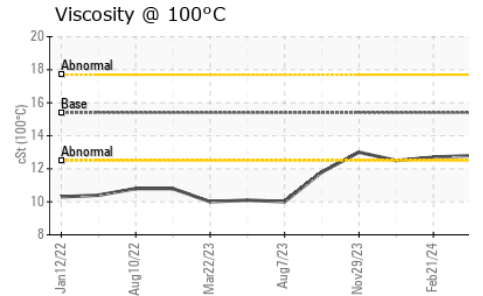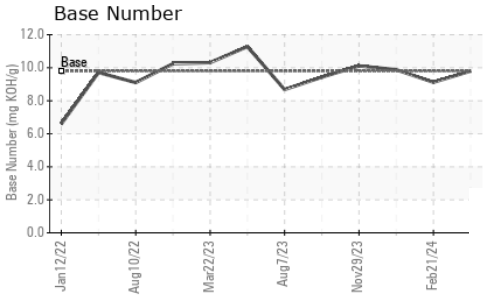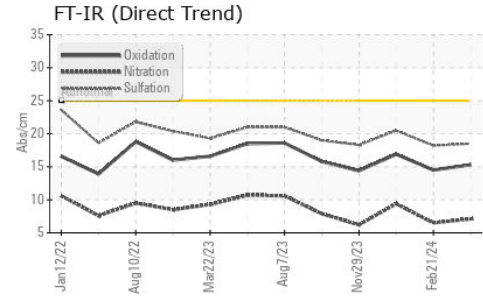

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>12.8</b> | 12.7     | 12.5 |

## GRAPHS

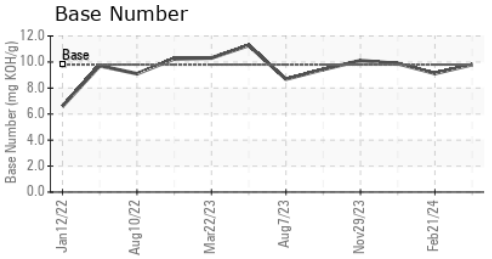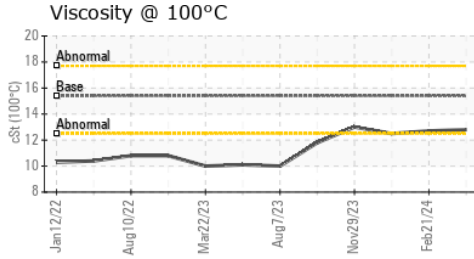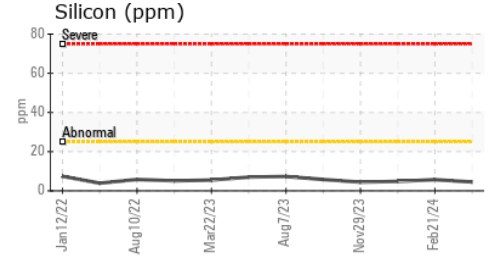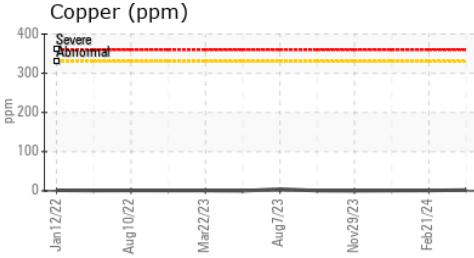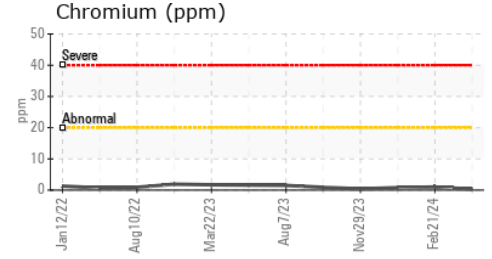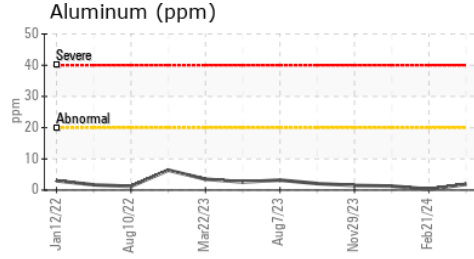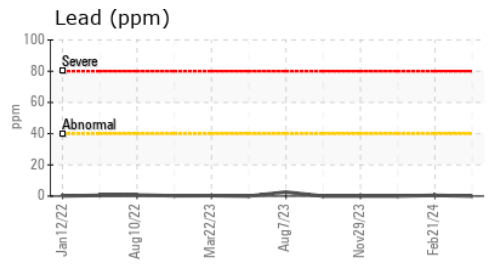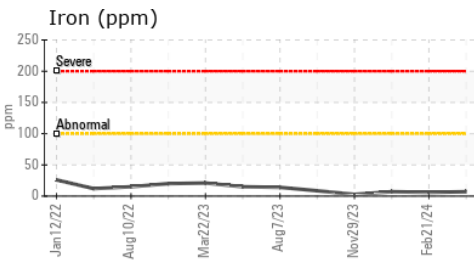

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109900      **Received** : 03 Apr 2024  
**Lab Number** : **06137621**      **Tested** : 04 Apr 2024  
**Unique Number** : 10957086      **Diagnosed** : 04 Apr 2024 - Wes Davis  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: