


OIL ANALYSIS REPORT

Area
FUEL
 Machine Id
317
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (17 QTS)

Sample Rating Trend

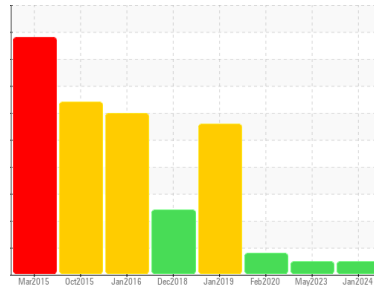

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0109582	PCA0090729	PCA62326007
Sample Date	Client Info		22 Jan 2024	02 May 2023	26 Feb 2020
Machine Age	mls	Client Info	275819	259742	120000
Oil Age	mls	Client Info	6000	6000	---
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	0.0

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	16	25	▲ 79
Chromium	ppm	ASTM D5185m >20	<1	0	5
Nickel	ppm	ASTM D5185m >4	0	0	1
Titanium	ppm	ASTM D5185m	4	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	4	6	2
Lead	ppm	ASTM D5185m >40	4	6	7
Copper	ppm	ASTM D5185m >330	<1	<1	3
Tin	ppm	ASTM D5185m >15	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	6	5	34
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 50	61	67	32
Manganese	ppm	ASTM D5185m 0	<1	0	---
Magnesium	ppm	ASTM D5185m 950	983	1061	564
Calcium	ppm	ASTM D5185m 1050	1190	1243	1377
Phosphorus	ppm	ASTM D5185m 995	1060	1071	789
Zinc	ppm	ASTM D5185m 1180	1252	1302	870
Sulfur	ppm	ASTM D5185m 2600	3670	3367	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	4	9
Sodium	ppm	ASTM D5185m	3	4	6
Potassium	ppm	ASTM D5185m >20	<1	2	2

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.7	1.6	1.01
Nitration	Abs/cm	*ASTM D7624 >20	15.9	16.5	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	25.7	26.0	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	26.4	28.4	14
Base Number (BN)	mg KOH/g	ASTM D2896	7.35	6.72	---

OIL ANALYSIS REPORT


FT-IR (Direct Trend)

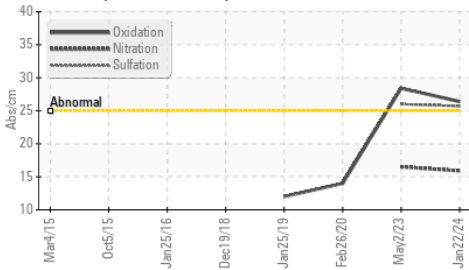

Base Number

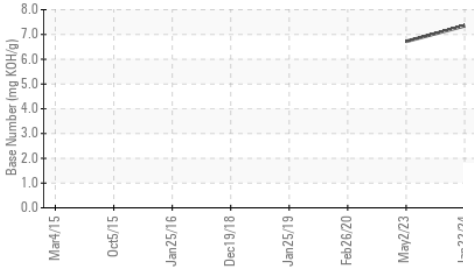









Viscosity @ 100°C

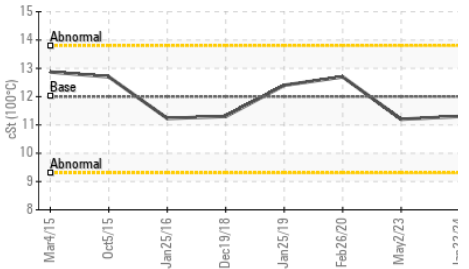

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	---	---
Precipitate	scalar	*Visual	NONE	---	---
Silt	scalar	*Visual	NONE	---	---
Debris	scalar	*Visual	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	11.2

GRAPHS

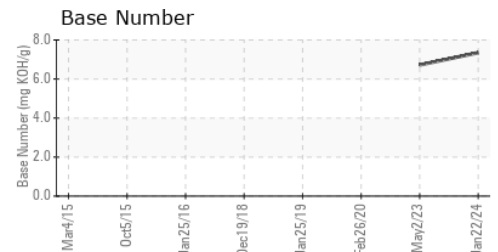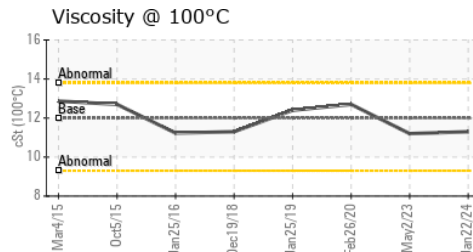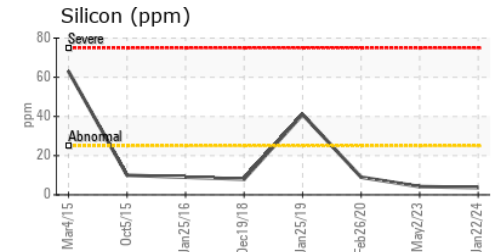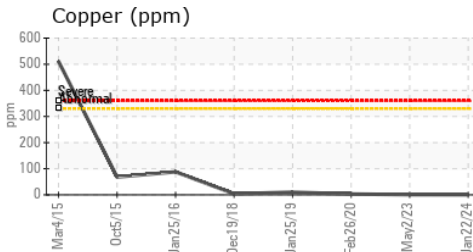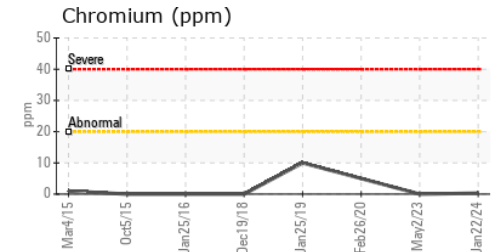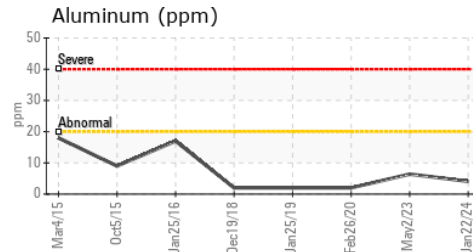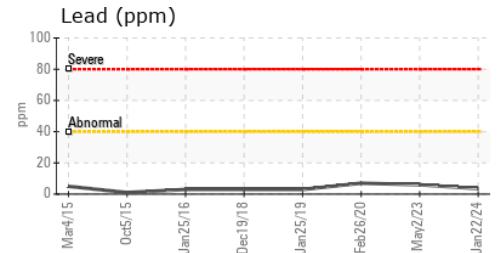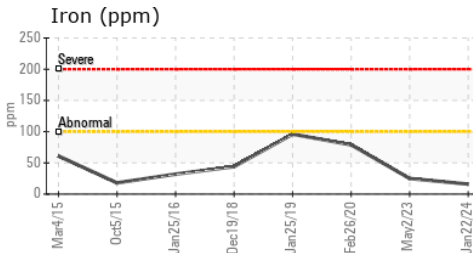

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109582
Lab Number : 06137638
Unique Number : 10957103
Test Package : MOB 2

Received : 03 Apr 2024
Tested : 04 Apr 2024
Diagnosed : 05 Apr 2024 - Sean Felton

DENNIS K BURKE INC - INTERNAL SAMPLES
 555 CONSTITUTION DR
 TAUNTON, MA
 US 02780
 Contact: GREG DUNKER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (617)889-6422