


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

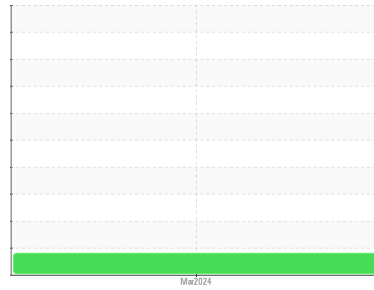

Machine Id
1134
 Component
Front Left Final Drive
 Fluid
LEAHY WOLF LUBEMASTER HYDRAULIC OIL (3 GAL)

DIAGNOSIS

▲ Recommendation

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0122050	---	---
Sample Date	Client Info		29 Mar 2024	---	---
Machine Age	hrs	Client Info	1913	---	---
Oil Age	hrs	Client Info	1913	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.075	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >750	486	---	---
Chromium	ppm	ASTM D5185m >9	2	---	---
Nickel	ppm	ASTM D5185m >10	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >40	2	---	---
Lead	ppm	ASTM D5185m >15	2	---	---
Copper	ppm	ASTM D5185m >40	▲ 70	---	---
Tin	ppm	ASTM D5185m >10	5	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	11	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	1	---	---
Manganese	ppm	ASTM D5185m	21	---	---
Magnesium	ppm	ASTM D5185m	98	---	---
Calcium	ppm	ASTM D5185m	3505	---	---
Phosphorus	ppm	ASTM D5185m	1074	---	---
Zinc	ppm	ASTM D5185m	1257	---	---
Sulfur	ppm	ASTM D5185m	4170	---	---



CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	10	---	---
Sodium	ppm	ASTM D5185m >51	4	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.075	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---









OIL ANALYSIS REPORT

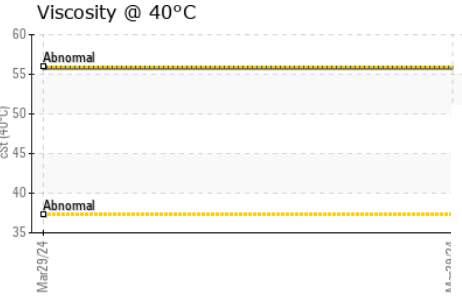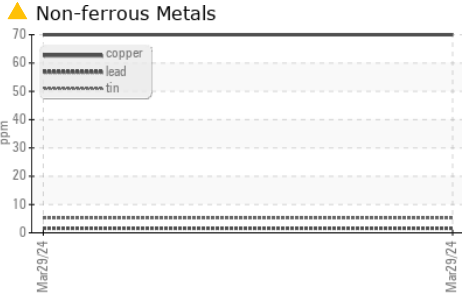

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	55.8	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

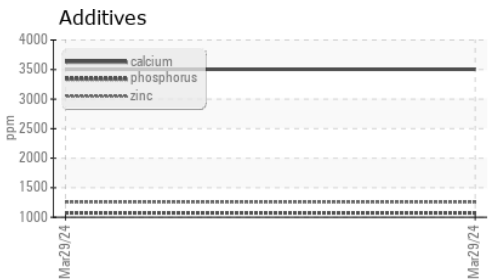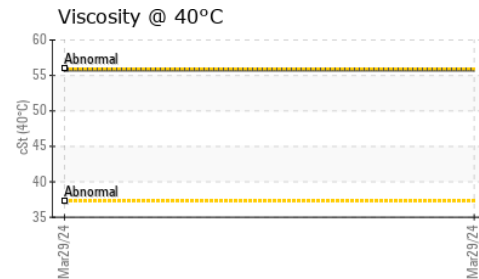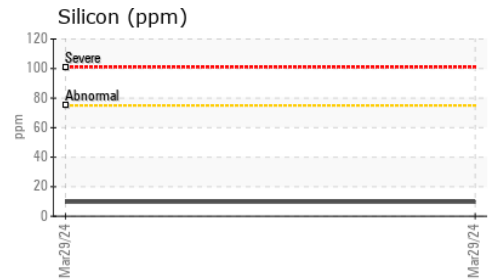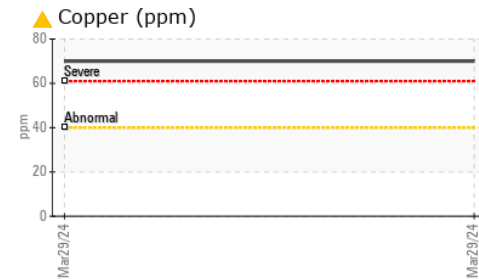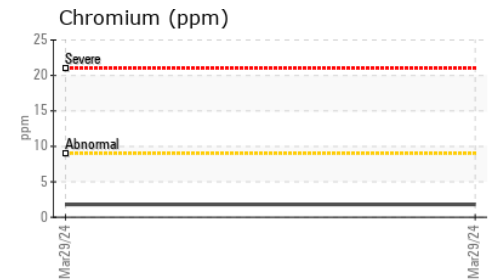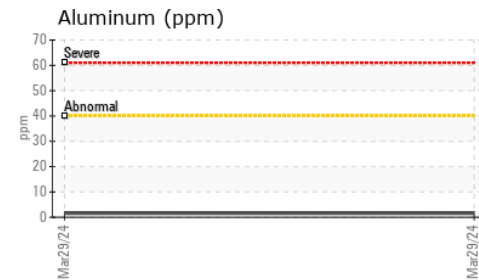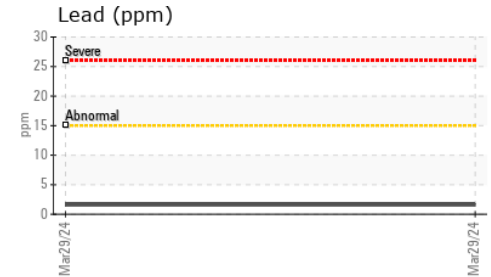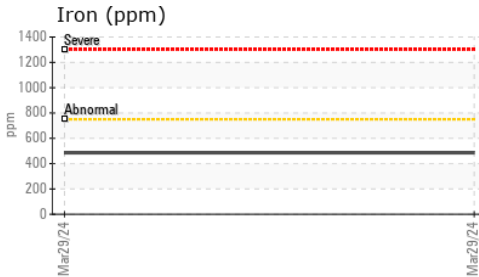

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0122050 **Received** : 03 Apr 2024
Lab Number : 06137803 **Tested** : 04 Apr 2024
Unique Number : 10962611 **Diagnosed** : 05 Apr 2024 - Sean Felton
Test Package : MOB 1

K5 CONSTRUCTION CORPORATION
 6301 S EAST AVENUE
 HODGKINS, IL
 US 60525
 Contact: NOELLE TERRAULT
 noellet@k-five.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)