




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

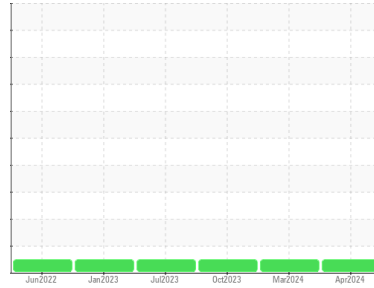

Area
(YA169088)

Machine Id
832000

Component
Natural Gas Engine

Fluid
CHEVRON DELO 400 NG (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0090051	GFL0090010	GFL0089969
Sample Date	Client Info	02 Apr 2024	05 Mar 2024	24 Oct 2023
Machine Age	hrs	865	865	865
Oil Age	hrs	0	0	865
Oil Changed	Client Info	Not Chngd	Not Chngd	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	4	10	8
Chromium	ppm	ASTM D5185m >4	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >9	2	3	2
Lead	ppm	ASTM D5185m >30	<1	0	10
Copper	ppm	ASTM D5185m >35	<1	0	6
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	34	10	5
Barium	ppm	ASTM D5185m	0	0	3
Molybdenum	ppm	ASTM D5185m	48	56	55
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	529	628	535
Calcium	ppm	ASTM D5185m	1474	1708	1620
Phosphorus	ppm	ASTM D5185m 800	710	798	765
Zinc	ppm	ASTM D5185m 880	873	1038	993
Sulfur	ppm	ASTM D5185m	2409	2387	2733

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	8	6	25
Sodium	ppm	ASTM D5185m	5	7	6
Potassium	ppm	ASTM D5185m >20	2	0	2

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	0	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	8.2	12.8	11.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.3	23.5	24.6

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.5	19.8	21.0
Base Number (BN)	mg KOH/g	ASTM D2896 6.1	7.5	4.9	3.3







OIL ANALYSIS REPORT

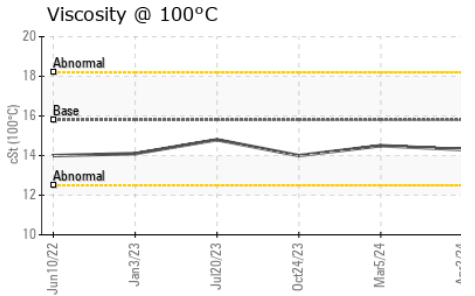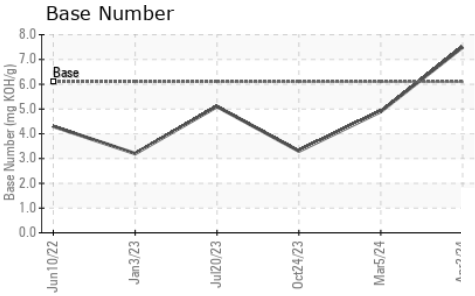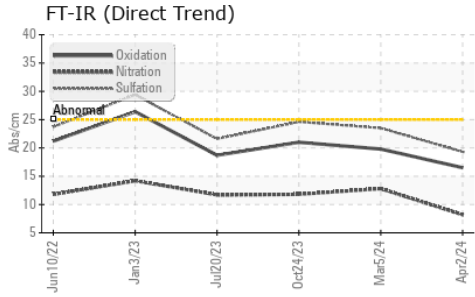

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.8	14.3	14.5	14.0

GRAPHS

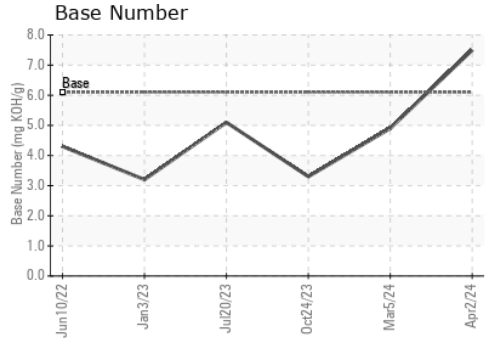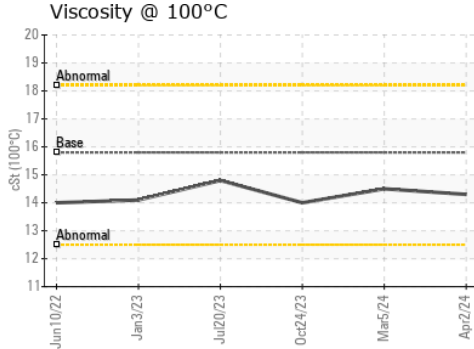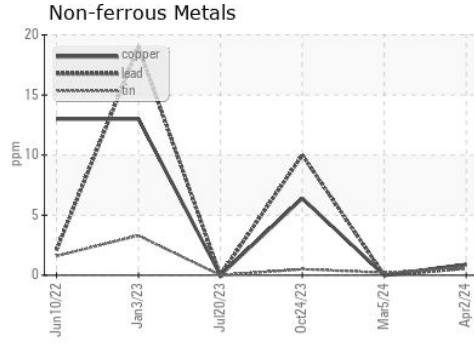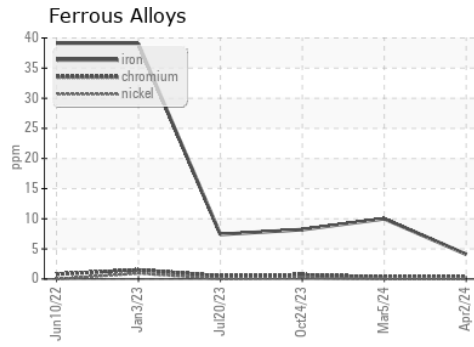

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0090051 **Received** : 04 Apr 2024
Lab Number : **06138258** **Tested** : 04 Apr 2024
Unique Number : 10963066 **Diagnosed** : 04 Apr 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 018 - Fayetteville
 4621 Marracco Drive
 Hope Mills, NC
 US 28348
 Contact: Robert Carter
 robert.carter@gflenv.com
 T: (910)596-1170
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)