


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

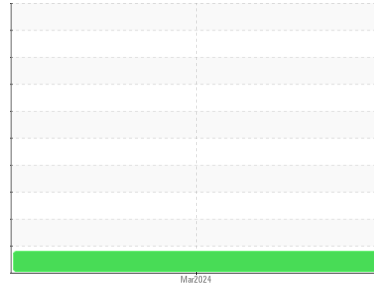

Machine Id
700-206
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Valve wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0114640	---	---
Sample Date	Client Info	05 Mar 2024	---	---
Machine Age	hrs Client Info	1470	---	---
Oil Age	hrs Client Info	480	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	---	---
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >100	44	---	---
Chromium ppm	ASTM D5185m >20	<1	---	---
Nickel ppm	ASTM D5185m >4	▲ 15	---	---
Titanium ppm	ASTM D5185m	<1	---	---
Silver ppm	ASTM D5185m >3	0	---	---
Aluminum ppm	ASTM D5185m >20	5	---	---
Lead ppm	ASTM D5185m >40	0	---	---
Copper ppm	ASTM D5185m >330	11	---	---
Tin ppm	ASTM D5185m >15	<1	---	---
Vanadium ppm	ASTM D5185m	<1	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 0	178	---	---
Barium ppm	ASTM D5185m 0	0	---	---
Molybdenum ppm	ASTM D5185m 60	263	---	---
Manganese ppm	ASTM D5185m 0	<1	---	---
Magnesium ppm	ASTM D5185m 1010	905	---	---
Calcium ppm	ASTM D5185m 1070	1509	---	---
Phosphorus ppm	ASTM D5185m 1150	926	---	---
Zinc ppm	ASTM D5185m 1270	1155	---	---
Sulfur ppm	ASTM D5185m 2060	3446	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	8	---	---
Sodium ppm	ASTM D5185m	3	---	---
Potassium ppm	ASTM D5185m >20	1	---	---

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.5	---	---
Nitration	Abs/cm *ASTM D7624 >20	9.4	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	22.6	---	---

FLUID DEGRADATION


method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	17.3	---	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.2	---	---

OIL ANALYSIS REPORT


▲ Ferrous Alloys

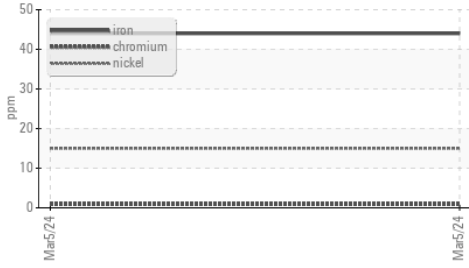


FT-IR (Direct Trend)

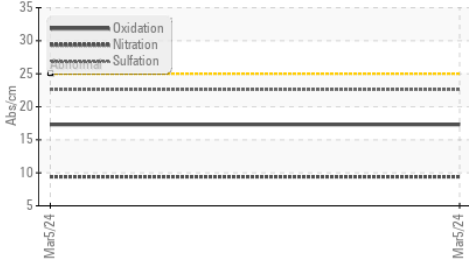

Base Number

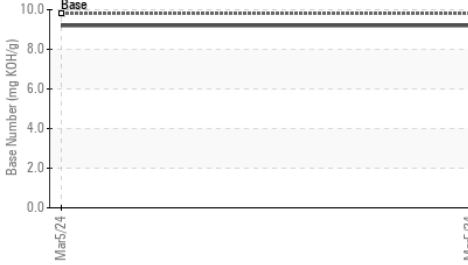









Viscosity @ 100°C

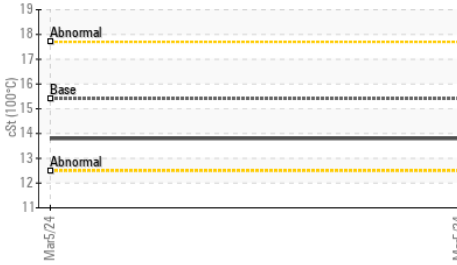

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	---

GRAPHS

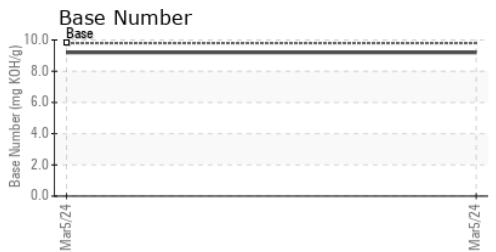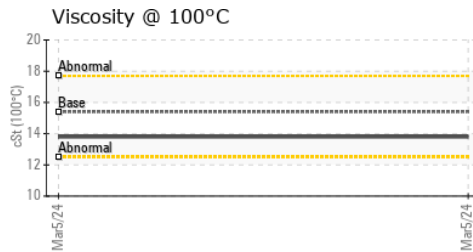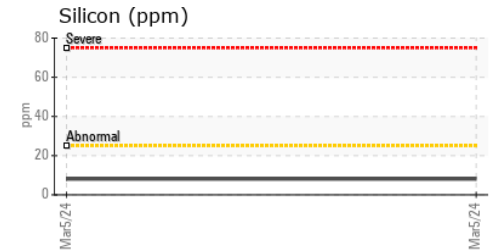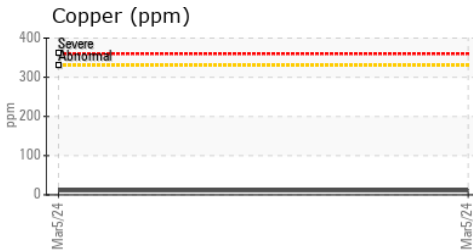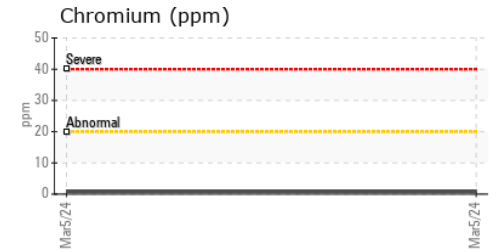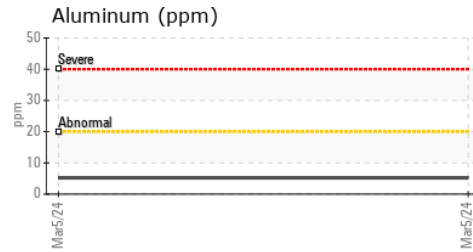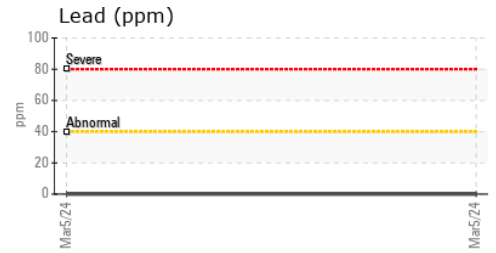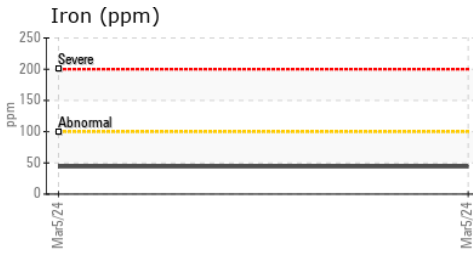

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0114640 **Received** : 04 Apr 2024
Lab Number : **06138337** **Tested** : 05 Apr 2024
Unique Number : 10963145 **Diagnosed** : 06 Apr 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

GE MARSHALL EXCAVATION
 1351 JOLIET RD
 VALPARAISO, IN
 US 46385
 Contact: MARK STEFFEL
 mark.steffel@gemarshall.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)