


OIL ANALYSIS REPORT

Walgreens - Tractor [Walgreens - Tractor] 136A624172

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11

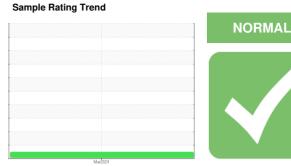

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

GAL)				Mar2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0106551		
Sample Date		Client Info		27 Mar 2024		
Machine Age	mls	Client Info		61540		
Oil Age	mls	Client Info		61450		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATI	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	54		
Chromium	ppm	ASTM D5185m	>5	5		
Nickel	ppm	ASTM D5185m	>2	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>30	52		
Lead	ppm	ASTM D5185m	>30	0		
Copper	ppm	ASTM D5185m	>150	78		
Tin	ppm	ASTM D5185m	>5	5		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	15		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	49		
Manganese	ppm	ASTM D5185m	0	4		
Magnesium	ppm	ASTM D5185m	950	650		
Calcium	ppm	ASTM D5185m	1050	1744		
Phosphorus	ppm	ASTM D5185m	995	745		
Zinc	ppm	ASTM D5185m	1180	972		
Sulfur	ppm	ASTM D5185m	2600	2428		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	7		
Sodium	ppm	ASTM D5185m		6		
Potassium	ppm	ASTM D5185m	>20	122		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1		
Nitration	Abs/cm	*ASTM D7624	>20	12.0		
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.4		
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.3		
Base Number (BN)	mg KOH/g	ASTM D2896		5.6		



OIL ANALYSIS REPORT

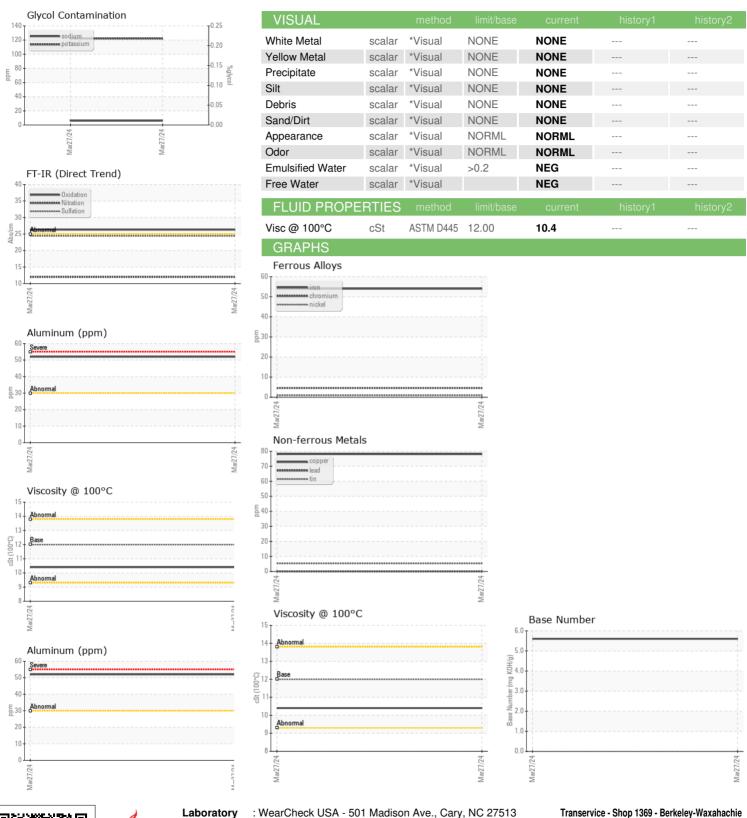





Certificate 12367

Laboratory Sample No. Lab Number : 06138401 Unique Number : 10963209

: PCA0106551 Test Package : FLEET

Received : 04 Apr 2024 Tested Diagnosed

: 05 Apr 2024 : 06 Apr 2024 - Don Baldridge

Transervice - Shop 1369 - Berkeley-Waxahachie 710 Ovilla Road Waxahachie, TX US 75167

Contact: Robert Beal rbeal@transervice.com T: (972)923-9928

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (972)923-9919

Submitted By: Robert Beal

Report Id: TSV1369 [WUSCAR] 06138401 (Generated: 04/06/2024 11:42:09) Rev: 1