




# OIL ANALYSIS REPORT



Machine Id  
**834025**  
 Component  
**Natural Gas Engine**  
 Fluid  
**{not provided} (--- GAL)**

Sample Rating Trend

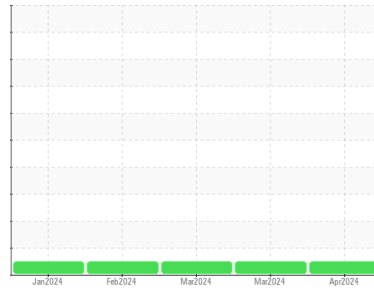

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0116582</b>  | GFL0111867  | GFL0111837  |
| Sample Date   | Client Info |             | <b>03 Apr 2024</b> | 27 Mar 2024 | 01 Mar 2024 |
| Machine Age   | hrs         | Client Info | <b>871</b>         | 819         | 637         |
| Oil Age       | hrs         | Client Info | <b>871</b>         | 819         | 637         |
| Oil Changed   | Client Info |             | <b>Not Changed</b> | Not Changed | Not Changed |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base      | current      | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >50 | <b>38</b>    | 45       | 40       |
| Chromium | ppm    | ASTM D5185m >4  | <b>1</b>     | 2        | <1       |
| Nickel   | ppm    | ASTM D5185m >2  | <b>&lt;1</b> | 2        | <1       |
| Titanium | ppm    | ASTM D5185m     | <b>&lt;1</b> | <1       | 0        |
| Silver   | ppm    | ASTM D5185m >3  | <b>0</b>     | <1       | 0        |
| Aluminum | ppm    | ASTM D5185m >9  | <b>3</b>     | 4        | 3        |
| Lead     | ppm    | ASTM D5185m >30 | <b>0</b>     | 2        | <1       |
| Copper   | ppm    | ASTM D5185m >35 | <b>13</b>    | 18       | 11       |
| Tin      | ppm    | ASTM D5185m >4  | <b>&lt;1</b> | 2        | 1        |
| Vanadium | ppm    | ASTM D5185m     | <b>&lt;1</b> | <1       | 0        |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b>     | <1       | 0        |

## ADDITIVES

|            | method | limit/base  | current     | history1 | history2 |
|------------|--------|-------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>6</b>    | 6        | 8        |
| Barium     | ppm    | ASTM D5185m | <b>3</b>    | 1        | 5        |
| Molybdenum | ppm    | ASTM D5185m | <b>56</b>   | 59       | 52       |
| Manganese  | ppm    | ASTM D5185m | <b>12</b>   | 14       | 13       |
| Magnesium  | ppm    | ASTM D5185m | <b>794</b>  | 769      | 806      |
| Calcium    | ppm    | ASTM D5185m | <b>1445</b> | 1373     | 1253     |
| Phosphorus | ppm    | ASTM D5185m | <b>681</b>  | 720      | 709      |
| Zinc       | ppm    | ASTM D5185m | <b>992</b>  | 965      | 908      |
| Sulfur     | ppm    | ASTM D5185m | <b>2774</b> | 2341     | 2013     |

## CONTAMINANTS

|           | method | limit/base        | current   | history1 | history2 |
|-----------|--------|-------------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >+100 | <b>24</b> | 30       | 29       |
| Sodium    | ppm    | ASTM D5185m       | <b>4</b>  | 5        | 3        |
| Potassium | ppm    | ASTM D5185m >20   | <b>4</b>  | 7        | 2        |

## INFRA-RED




|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844     | <b>0</b>    | 0        | 0        |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>12.8</b> | 13.2     | 12.1     |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>24.7</b> | 24.6     | 23.8     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>22.5</b> | 22.6     | 21.4     |
| Base Number (BN) | mg KOH/g | ASTM D2896      | <b>3.5</b>  | 3.5      | 4.0      |







# OIL ANALYSIS REPORT

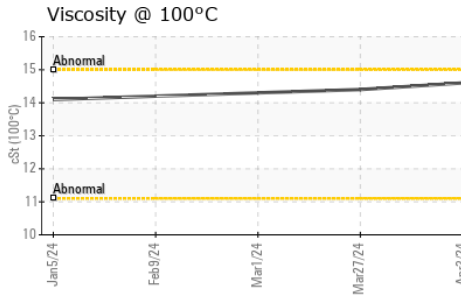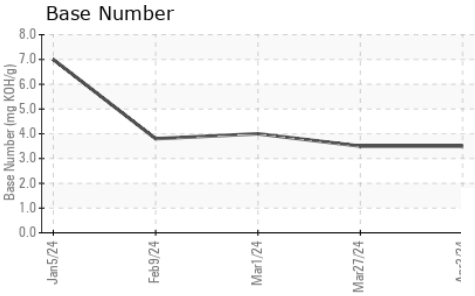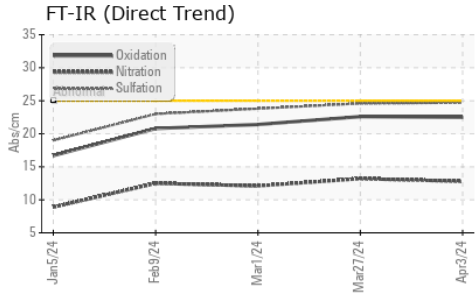

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.1    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.6    | 14.4     | 14.3     |

## GRAPHS

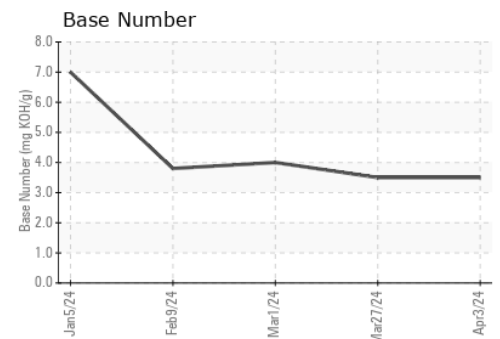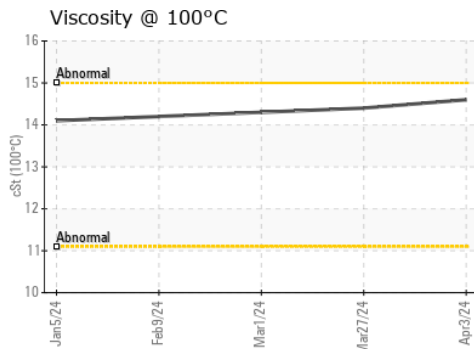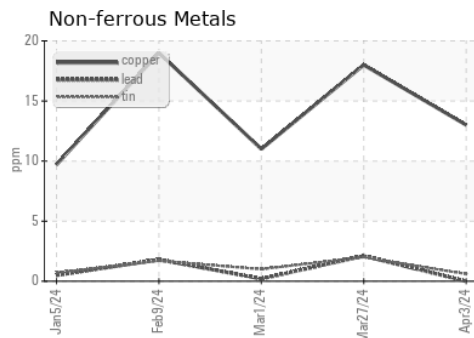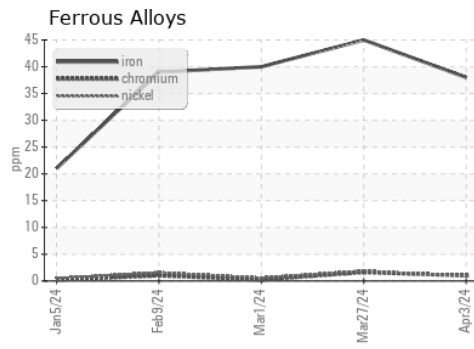

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116582  
**Lab Number** : 06138415  
**Unique Number** : 10963223  
**Test Package** : FLEET  
**Received** : 04 Apr 2024  
**Tested** : 05 Apr 2024  
**Diagnosed** : 05 Apr 2024 - Wes Davis

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)