




# OIL ANALYSIS REPORT

Sample Rating Trend

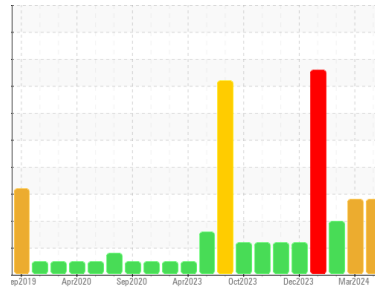

DIRT



Area  
**(83J3TW)**  
 Machine Id  
**229035-632119**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of fuel present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0114114</b>	GFL0108052	GFL0108026
Sample Date	Client Info	<b>20 Mar 2024</b>	01 Mar 2024	13 Feb 2024
Machine Age	hrs	<b>10617</b>	10483	10346
Oil Age	hrs	<b>10350</b>	0	10216
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	0.0

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>40</b>	29	14
Chromium	ppm ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>4</b>	4	3
Lead	ppm ASTM D5185m >40	<b>1</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>57</b>	14	11
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	1	1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>8</b>	11	11
Barium	ppm ASTM D5185m 0	<b>14</b>	13	13
Molybdenum	ppm ASTM D5185m 60	<b>47</b>	48	48
Manganese	ppm ASTM D5185m 0	<b>4</b>	4	3
Magnesium	ppm ASTM D5185m 1010	<b>761</b>	753	740
Calcium	ppm ASTM D5185m 1070	<b>1339</b>	1245	1212
Phosphorus	ppm ASTM D5185m 1150	<b>866</b>	949	939
Zinc	ppm ASTM D5185m 1270	<b>1170</b>	1120	1127
Sulfur	ppm ASTM D5185m 2060	<b>3199</b>	3238	2858

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>▲ 34</b>	▲ 37	▲ 33
Sodium	ppm ASTM D5185m	<b>3</b>	3	2
Potassium	ppm ASTM D5185m >20	<b>5</b>	5	5
Fuel	% ASTM D3524 >5	<b>▲ 8.2</b>	▲ 5.3	<1.0

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.4	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>9.3</b>	7.8	6.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.8</b>	20.0	18.7


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.8</b>	16.0	14.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.1</b>	8.9	9.0




# OIL ANALYSIS REPORT


## Fuel Dilution

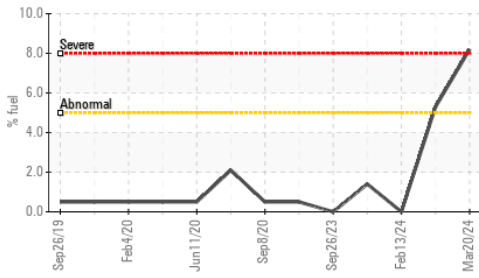


## Silicon (ppm)

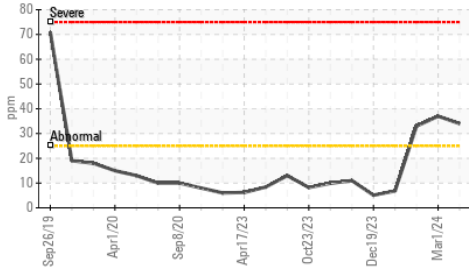


## FT-IR (Direct Trend)

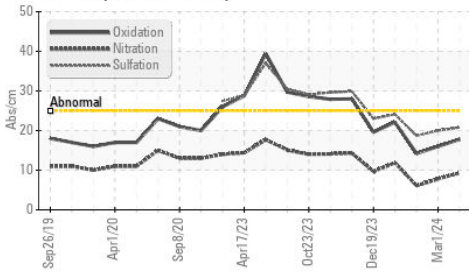

## FT-IR (Direct Trend)

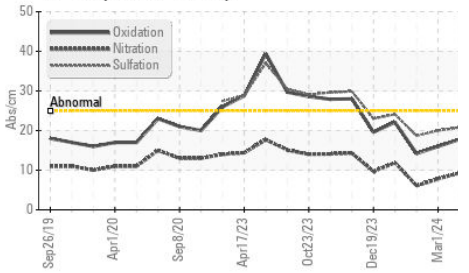

## Base Number

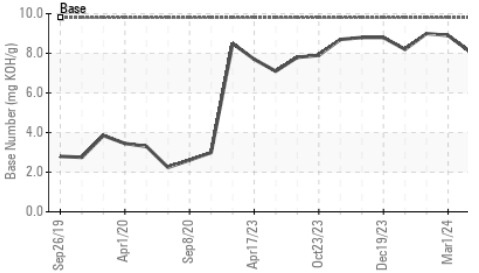

## VISUAL


method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


method	limit/base	current	history1	history2		
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.4	▲ 11.0	▲ 11.6

## GRAPHS


### Ferrous Alloys

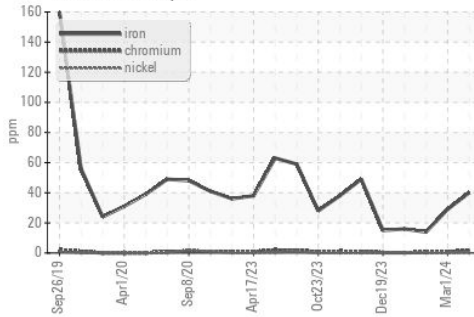


### Non-ferrous Metals

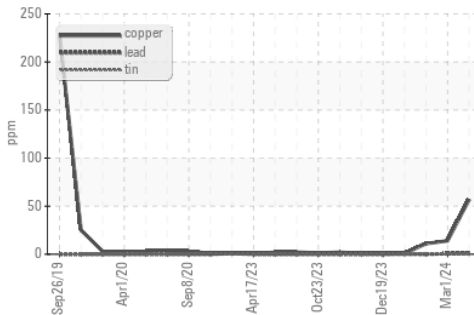

## Viscosity @ 100°C

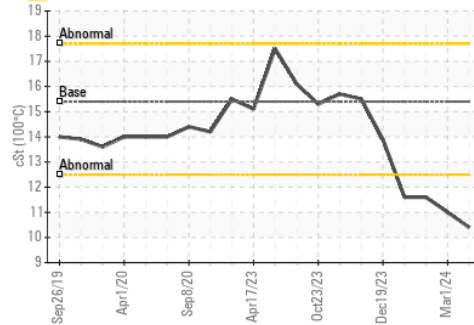

## Base Number

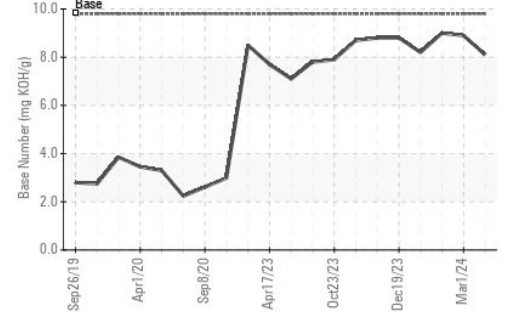

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0114114

Lab Number : 06139178

Unique Number : 10963986

Test Package : FLEET ( Additional Tests: PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 04 Apr 2024

Tested : 08 Apr 2024

Diagnosed : 09 Apr 2024 - Jonathan Hester

GFL Environmental - 836 - Kansas City Hauling

7801 East Truman Road

Kansas City, MO

US 64126

Contact: Loyce Stewart

loyce.stewart@gflenv.com

T:

F: