



OIL ANALYSIS REPORT

Area
(YA119630)

Machine Id

2526


Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (8 GAL)

Sample Rating Trend

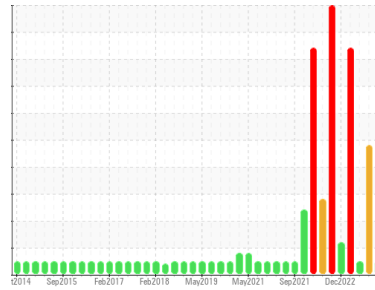

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | GFL0090017 | GFL0080560 | GFL0066866 |
| Sample Date | Client Info | | | 04 Apr 2024 | 04 Oct 2023 | 04 Jul 2023 |
| Machine Age | mls | Client Info | | 134659 | 134659 | 134659 |
| Oil Age | mls | Client Info | | 0 | 134659 | 134659 |
| Oil Changed | Client Info | | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | SEVERE | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | | NEG | NEG | NEG |
| Glycol | WC Method | | | NEG | NEG | 0.0 |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >165 | 13 | 23 | 13 |
| Chromium | ppm | ASTM D5185m | >5 | 1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | <1 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | <1 | 3 |
| Lead | ppm | ASTM D5185m | >150 | 2 | 1 | 7 |
| Copper | ppm | ASTM D5185m | >90 | 13 | 65 | 25 |
| Tin | ppm | ASTM D5185m | >5 | 1 | <1 | 2 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | <1 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | 8 | 16 | 9 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 2 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 59 | 54 | 63 |
| Manganese | ppm | ASTM D5185m | 0 | 1 | 2 | <1 |
| Magnesium | ppm | ASTM D5185m | 1010 | 912 | 884 | 990 |
| Calcium | ppm | ASTM D5185m | 1070 | 1089 | 1077 | 1116 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1000 | 987 | 1119 |
| Zinc | ppm | ASTM D5185m | 1270 | 1202 | 1191 | 1340 |
| Sulfur | ppm | ASTM D5185m | 2060 | 3052 | 2960 | 3977 |




| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >35 | 23 | ▲ 84 | 9 |
| Sodium | ppm | ASTM D5185m | | 3 | 3 | 24 |
| Potassium | ppm | ASTM D5185m | >20 | 6 | 3 | 161 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >7.5 | 0.2 | 0.2 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 6.4 | 6.9 | 6.6 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 18.3 | 18.7 | 19.6 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 14.2 | 14.0 | 15.0 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 8.6 | 9.2 | 9.4 |







OIL ANALYSIS REPORT

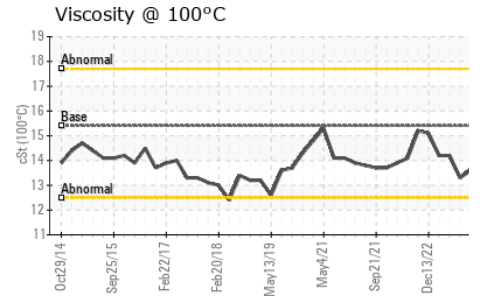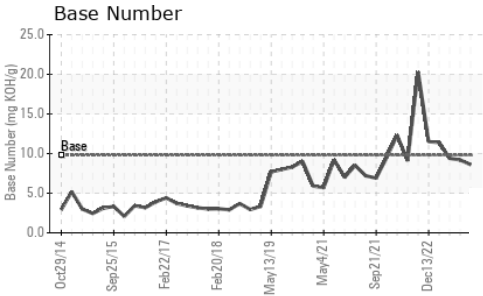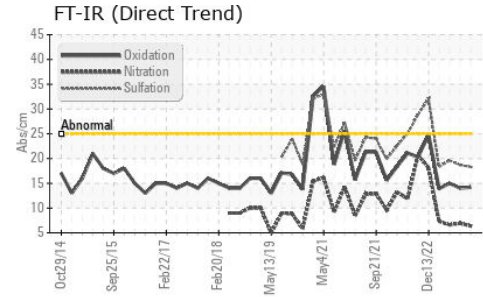

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.6 | 13.3 | 14.2 |

GRAPHS

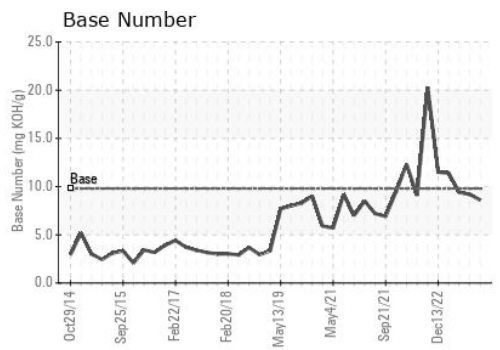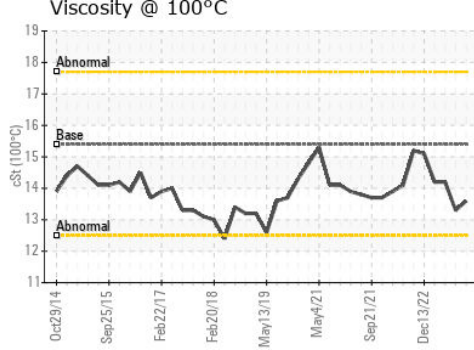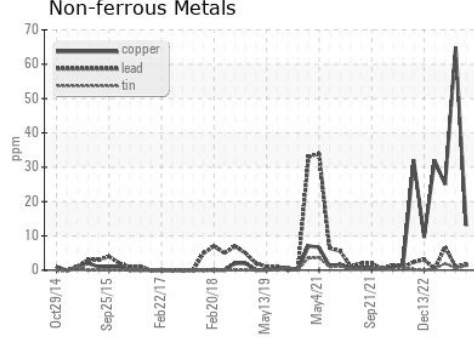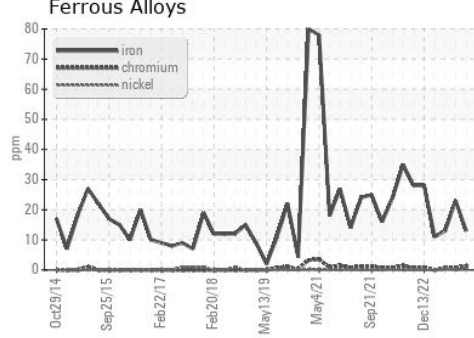

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0090017
Lab Number : 06139478
Unique Number : 10964286
Test Package : FLEET

Received : 05 Apr 2024
Tested : 05 Apr 2024
Diagnosed : 05 Apr 2024 - Wes Davis

GFL Environmental - 018 - Fayetteville
 4621 Marracco Drive
 Hope Mills, NC
 US 28348

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Robert Carter
 robert.carter@gflenv.com
 T: (910)596-1170
 F: