




OIL ANALYSIS REPORT

Sample Rating Trend

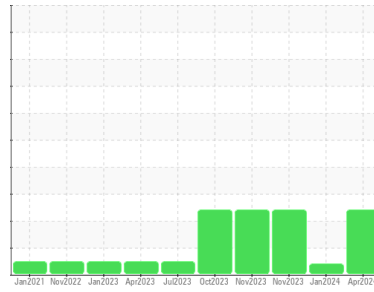

GLYCOL



Area
(EPW709)

Machine Id
410010

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0114503	GFL0074647	GFL0074639
Sample Date	Client Info		03 Apr 2024	18 Jan 2024	10 Nov 2023
Machine Age	hrs	Client Info	9267	8688	8187
Oil Age	hrs	Client Info	579	558	649
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	ATTENTION	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>90	20	16	16
Chromium	ppm	ASTM D5185m	>20	2	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	10	2	5
Lead	ppm	ASTM D5185m	>40	<1	<1	0
Copper	ppm	ASTM D5185m	>330	<1	<1	0
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	9	4	<1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	74	52	23
Manganese	ppm	ASTM D5185m	0	<1	0	0
Magnesium	ppm	ASTM D5185m	1010	796	653	362
Calcium	ppm	ASTM D5185m	1070	1011	798	407
Phosphorus	ppm	ASTM D5185m	1150	902	898	531
Zinc	ppm	ASTM D5185m	1270	1101	924	634
Sulfur	ppm	ASTM D5185m	2060	2748	2181	1425

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	6	4	2
Sodium	ppm	ASTM D5185m		▲ 297	138	41
Potassium	ppm	ASTM D5185m	>20	▲ 100	39	27
Glycol	%	*ASTM D2982		NEG	0.0	NEG

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	1.3	1.3	1.3
Nitration	Abs/cm	*ASTM D7624	>20	8.6	7.5	6.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.4	18.5	16.3


FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.2	11.4	8.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.1	7.1	3.4




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

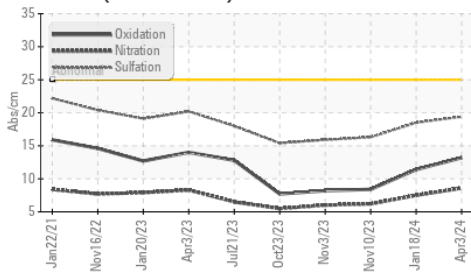


Glycol Contamination

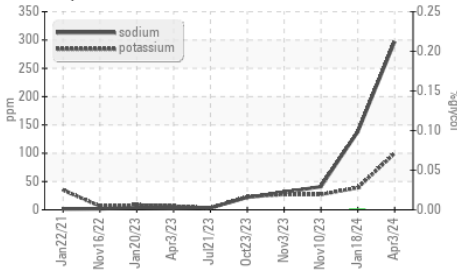

Viscosity @ 100°C

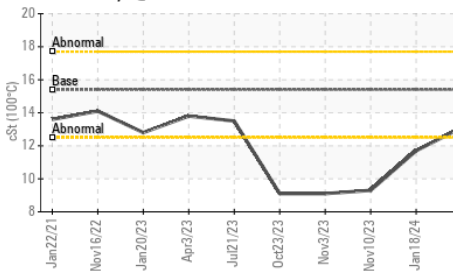

Glycol Contamination

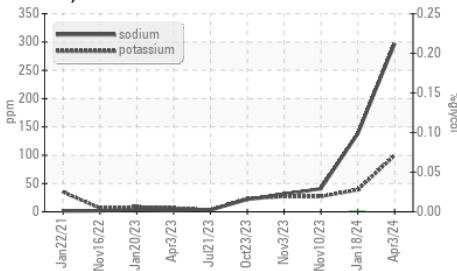


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	11.7

GRAPHS


Ferrous Alloys

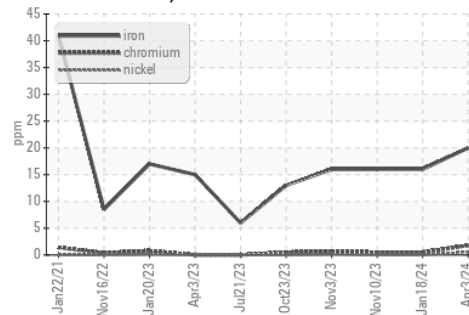


Non-ferrous Metals

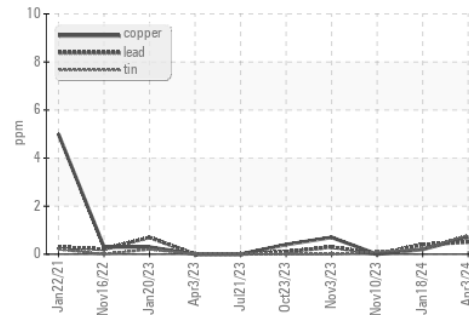

Viscosity @ 100°C

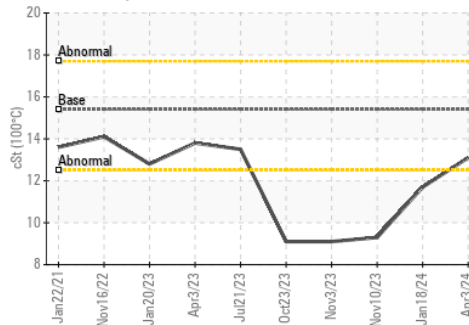

Base Number

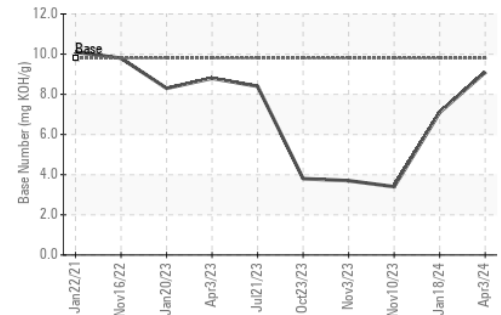

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0114503

Lab Number : 06139500

Unique Number : 10964308

Test Package : FLEET (Additional Tests: Glycol)

Received : 05 Apr 2024

Tested : 09 Apr 2024

Diagnosed : 09 Apr 2024 - Jonathan Hester

GFL Environmental - 095 - Atlanta West

2699 Cochran Industrial Blvd

Douglasville, GA

US 30127-1332

Contact: Darrell Welch

darrell.welch@gflenv.com

T: (800)207-6618

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)