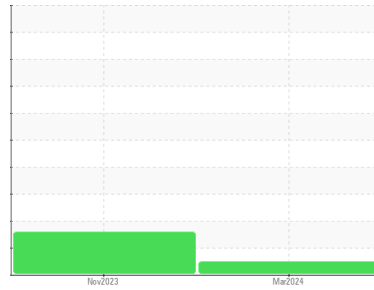


OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL


Area
(TEMP) Preferred Service-Tractor
 Machine Id
[Preferred Service-Tractor] 192A32037B
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON UHP 5W30 (36 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0120225	PCA0112167	---
Sample Date	Client Info		28 Mar 2024	25 Nov 2023	---
Machine Age	mls	Client Info	48760	24131	---
Oil Age	mls	Client Info	24629	24128	---
Oil Changed	Client Info		Not Changed	Changed	---
Sample Status			NORMAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	38	36	---
Chromium	ppm	ASTM D5185m >20	2	<1	---
Nickel	ppm	ASTM D5185m >2	4	<1	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m >2	<1	0	---
Aluminum	ppm	ASTM D5185m >25	15	25	---
Lead	ppm	ASTM D5185m >40	<1	2	---
Copper	ppm	ASTM D5185m >330	267	261	---
Tin	ppm	ASTM D5185m >15	4	5	---
Vanadium	ppm	ASTM D5185m	<1	<1	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	31	234	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 64	87	118	---
Manganese	ppm	ASTM D5185m 0	2	4	---
Magnesium	ppm	ASTM D5185m 1160	1321	676	---
Calcium	ppm	ASTM D5185m 820	1128	1497	---
Phosphorus	ppm	ASTM D5185m 1160	1188	708	---
Zinc	ppm	ASTM D5185m 1260	1553	808	---
Sulfur	ppm	ASTM D5185m 3000	3614	2082	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	20	▲ 53	---
Sodium	ppm	ASTM D5185m	6	7	---
Potassium	ppm	ASTM D5185m >20	44	64	---




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	0.5	---
Nitration	Abs/cm	*ASTM D7624 >20	10.6	10.3	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.0	25.1	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.2	23.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 11.0	6.6	7.2	---





OIL ANALYSIS REPORT

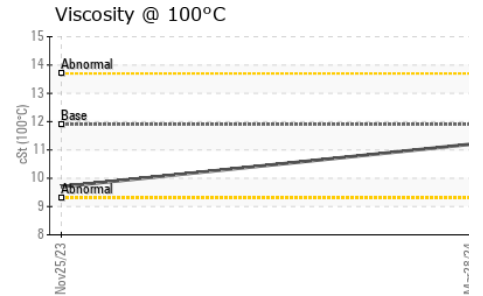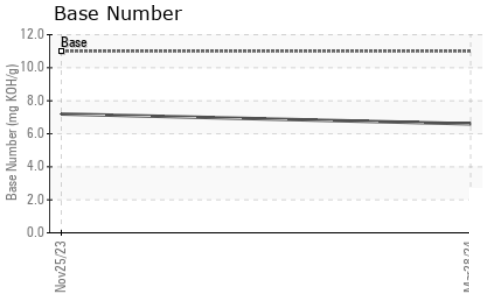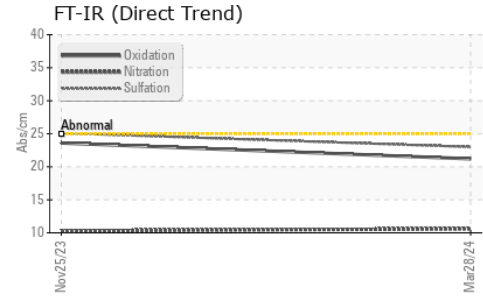

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	11.2	9.7

GRAPHS

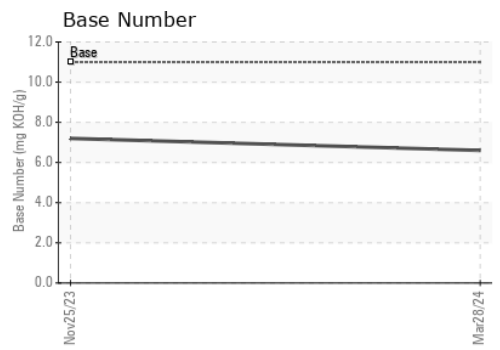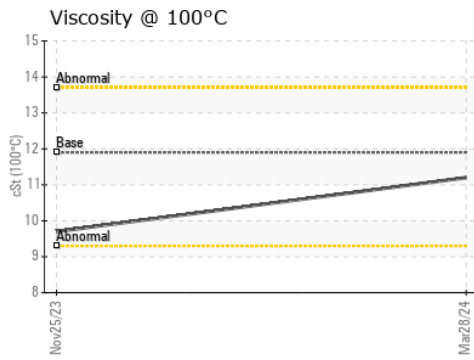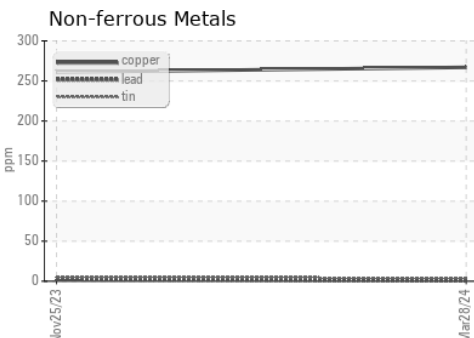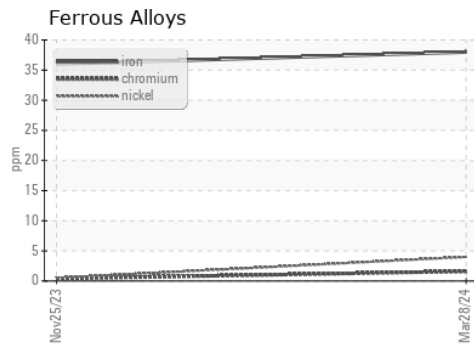

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0120225 **Received** : 05 Apr 2024
Lab Number : 06139521 **Tested** : 05 Apr 2024
Unique Number : 10964329 **Diagnosed** : 05 Apr 2024 - Wes Davis
Test Package : FLEET

Transervice - Shop 1920 - Preferred Service
 1955 W. North Avenue, Bldg K
 Melrose Park, IL
 US 60160
 Contact: Tom Lindeman
 tlindemann@transervice.com
 T: (630)376-8946
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)