




OIL ANALYSIS REPORT



Area
(34745UA)
 Machine Id
913006
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

Sample Rating Trend

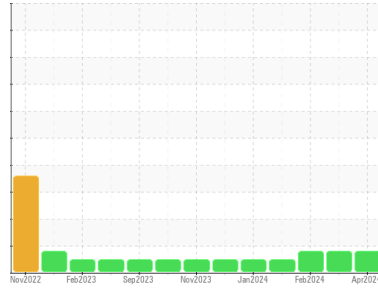

WEAR



DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Valve wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0116579	GFL0111866	GFL0108288
Sample Date	Client Info		03 Apr 2024	27 Mar 2024	15 Feb 2024
Machine Age	hrs	Client Info	4201	4102	4051
Oil Age	hrs	Client Info	4201	4102	4051
Oil Changed	Client Info		Not Changed	Not Changd	Not Changed
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	14	15	13
Chromium	ppm	ASTM D5185m >20	<1	1	<1
Nickel	ppm	ASTM D5185m >5	▲ 13	▲ 12	▲ 9
Titanium	ppm	ASTM D5185m >2	0	<1	<1
Silver	ppm	ASTM D5185m >2	0	<1	0
Aluminum	ppm	ASTM D5185m >20	2	2	2
Lead	ppm	ASTM D5185m >40	0	<1	0
Copper	ppm	ASTM D5185m >330	16	20	22
Tin	ppm	ASTM D5185m >15	0	1	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	8	11	9
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	60	61	55
Manganese	ppm	ASTM D5185m	0	1	<1
Magnesium	ppm	ASTM D5185m 450	968	869	851
Calcium	ppm	ASTM D5185m 3000	1219	1137	1057
Phosphorus	ppm	ASTM D5185m 1150	1078	984	944
Zinc	ppm	ASTM D5185m 1350	1291	1166	1136
Sulfur	ppm	ASTM D5185m 4250	3717	3001	2837

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	8	5
Sodium	ppm	ASTM D5185m >216	<1	1	1
Potassium	ppm	ASTM D5185m >20	5	7	6

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.4	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	8.0	7.5	7.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.8	19.1	19.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.6	15.0	15.0
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	7.5	7.7	7.4







OIL ANALYSIS REPORT

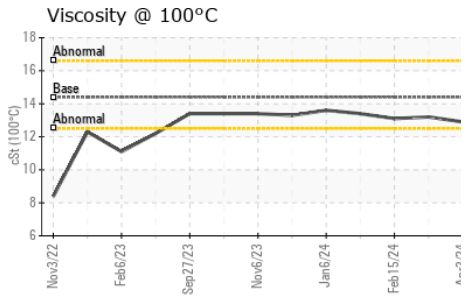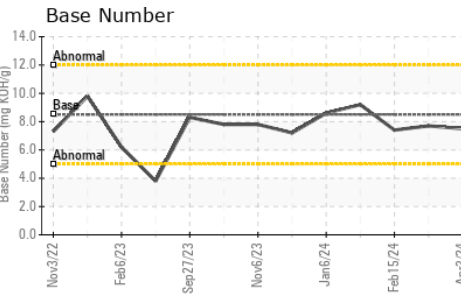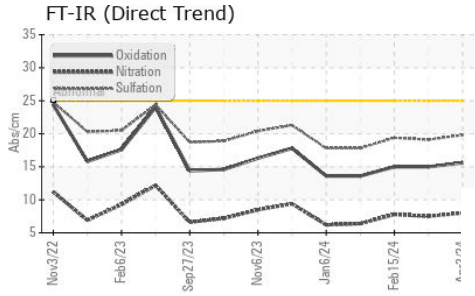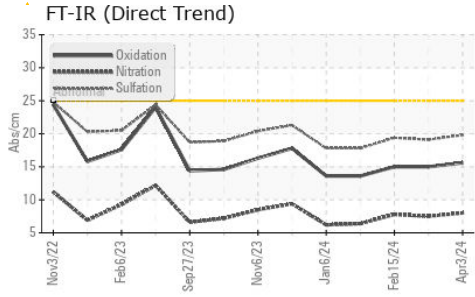

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.9	13.2

GRAPHS

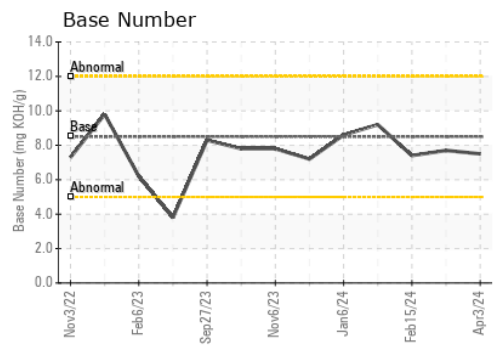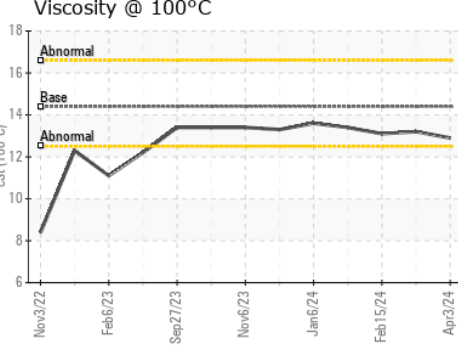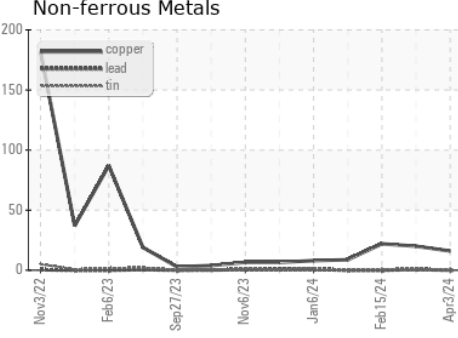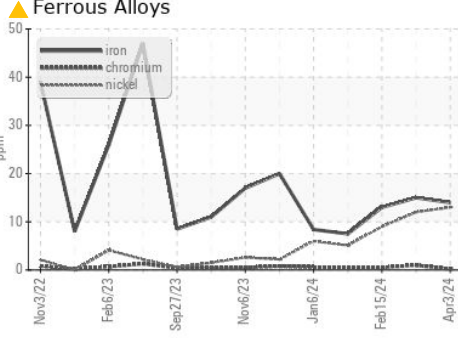

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0116579
Lab Number : 06139679
Unique Number : 10964487
Test Package : FLEET
Received : 05 Apr 2024
Tested : 06 Apr 2024
Diagnosed : 07 Apr 2024 - Don Baldrige

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)