




# OIL ANALYSIS REPORT

Sample Rating Trend

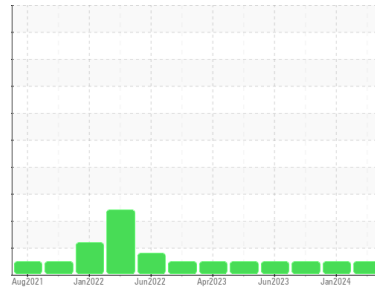

**NORMAL**



Machine Id  
**727085-310038**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0096051</b>	GFL0095984	GFL0071763
Sample Date	Client Info		<b>04 Apr 2024</b>	04 Jan 2024	13 Sep 2023
Machine Age	hrs	Client Info	<b>16633</b>	16618	16074
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>23</b>	20	18
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	3
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	2	4
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	10
Copper	ppm	ASTM D5185m >150	<b>&lt;1</b>	1	6
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>21</b>	21	9
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>52</b>	51	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m 560	<b>603</b>	569	681
Calcium	ppm	ASTM D5185m 1510	<b>1711</b>	1507	1908
Phosphorus	ppm	ASTM D5185m 780	<b>850</b>	789	900
Zinc	ppm	ASTM D5185m 870	<b>1063</b>	963	1147
Sulfur	ppm	ASTM D5185m 2040	<b>3161</b>	2329	3193

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>9</b>	8	8
Sodium	ppm	ASTM D5185m	<b>5</b>	12	13
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	4

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	0.9	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>13.9</b>	12.7	12.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.1</b>	24.6	29.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>26.2</b>	24.2	25.0
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>5.7</b>	5.5	3.1







# OIL ANALYSIS REPORT

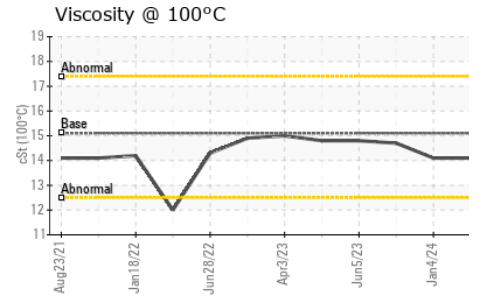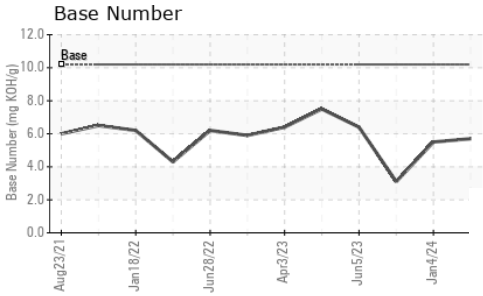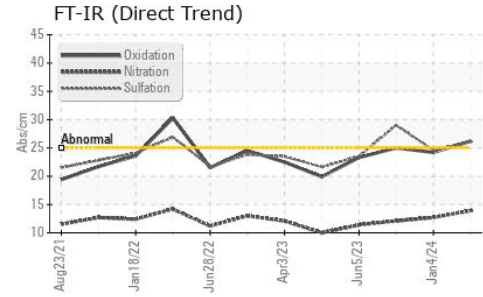

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.1	14.7

## GRAPHS

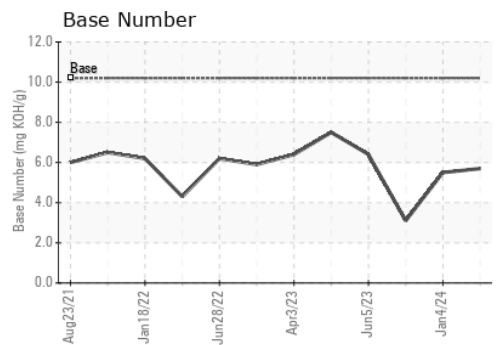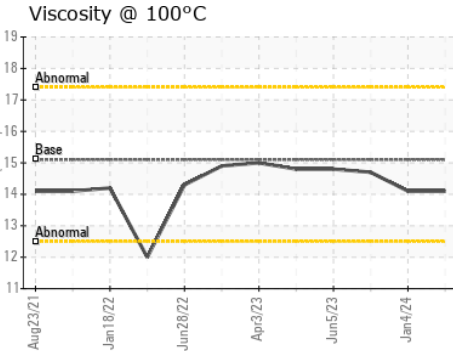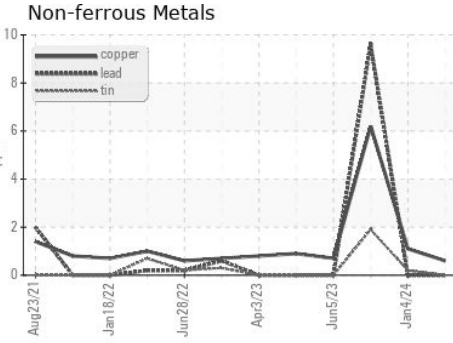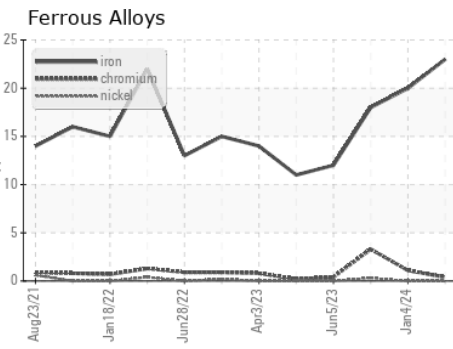

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0096051      **Received** : 05 Apr 2024  
**Lab Number** : **06139697**      **Tested** : 06 Apr 2024  
**Unique Number** : 10964505      **Diagnosed** : 07 Apr 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 883 - Orange City**  
 1378 South Volusia Ave  
 Orange City, FL  
 US 32763  
 Contact: JEFF COOPERSMITH  
 JCOOPERSMITH@GFLENV.COM  
 T: (386)503-8468  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)