




PROBLEM SUMMARY

Sample Rating Trend


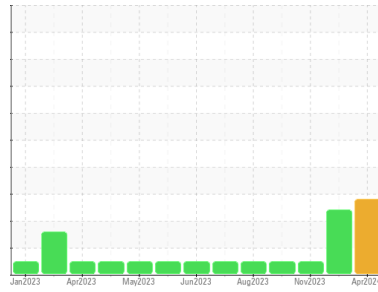


FUEL



Area
(62A1N8X) TALLASSEE
 Machine Id
921070
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

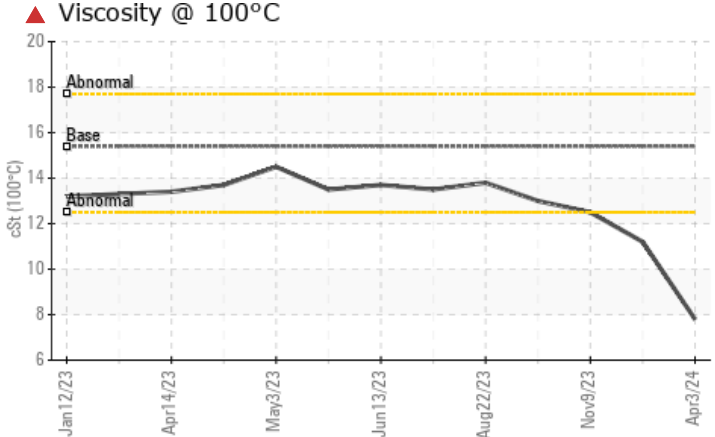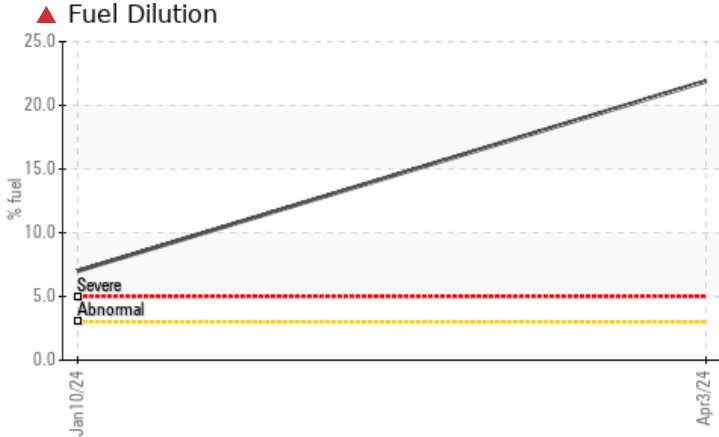

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	NORMAL
Fuel	%	ASTM D3524	>3.0	▲ 21.9	▲ 7.0	<1.0
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 7.8	▲ 11.2	12.5

Customer Id: GFL172
 Sample No.: GFL0092438
 Lab Number: 06139741
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

FUEL



10 Jan 2024 Diag: Wes Davis

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



NORMAL



09 Nov 2023 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



NORMAL



16 Oct 2023 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

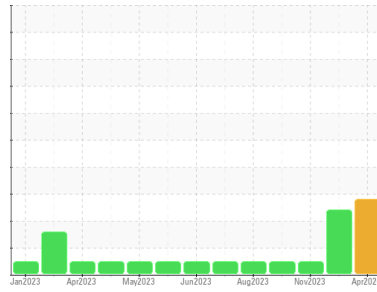

FUEL



Area
(62A1N8X) TALLASSEE
 Machine Id
921070
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation
 We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0092438	GFL0079720	GFL0079708
Sample Date	Client Info		03 Apr 2024	10 Jan 2024	09 Nov 2023
Machine Age	hrs	Client Info	7937	7394	6770
Oil Age	hrs	Client Info	7937	7394	6770
Oil Changed	Client Info		Not Chngd	N/A	N/A
Sample Status			SEVERE	SEVERE	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	18	15	26
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >5	0	0	<1
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	3	4
Lead	ppm	ASTM D5185m >40	<1	2	5
Copper	ppm	ASTM D5185m >330	1	1	3
Tin	ppm	ASTM D5185m >15	0	1	1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	2	5	7
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	45	55	58
Manganese	ppm	ASTM D5185m 0	0	<1	<1
Magnesium	ppm	ASTM D5185m 1010	731	875	846
Calcium	ppm	ASTM D5185m 1070	830	947	1049
Phosphorus	ppm	ASTM D5185m 1150	789	932	875
Zinc	ppm	ASTM D5185m 1270	952	1147	1113
Sulfur	ppm	ASTM D5185m 2060	2463	2616	2143

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	7	7	12
Sodium	ppm	ASTM D5185m	7	5	10
Potassium	ppm	ASTM D5185m >20	<1	3	4
Fuel	%	ASTM D3524 >3.0	▲ 21.9	▲ 7.0	<1.0

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.4	0.4	0.8
Nitration	Abs/cm	*ASTM D7624 >20	9.2	8.7	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.9	19.4	23.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.9	15.6	20.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	4.4	6.3	4.6







OIL ANALYSIS REPORT

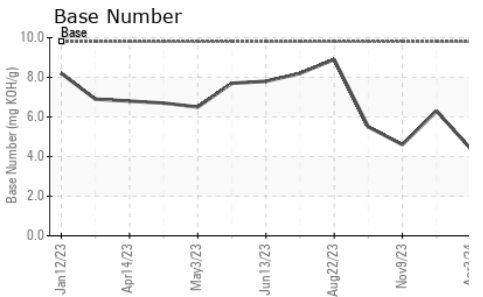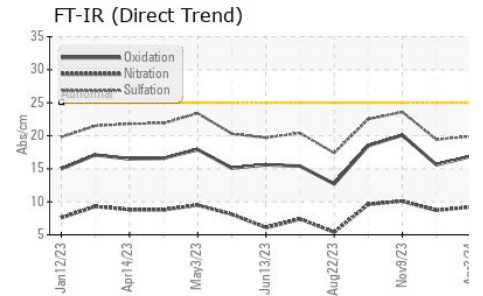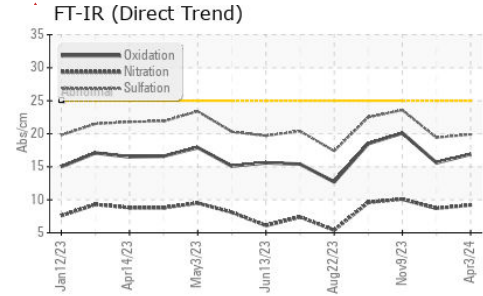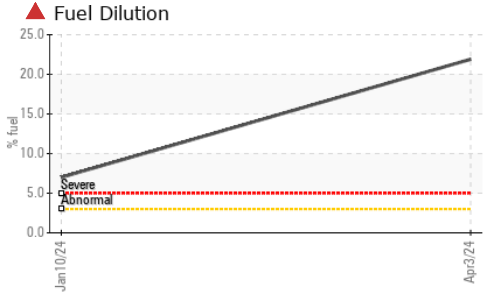

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 7.8	▲ 11.2

GRAPHS

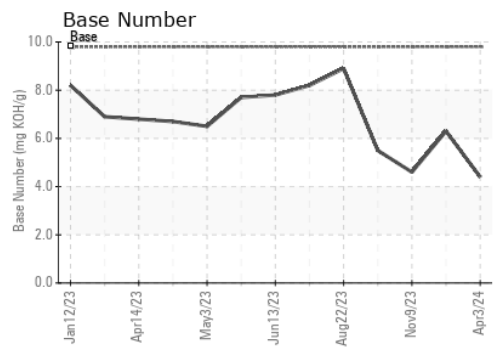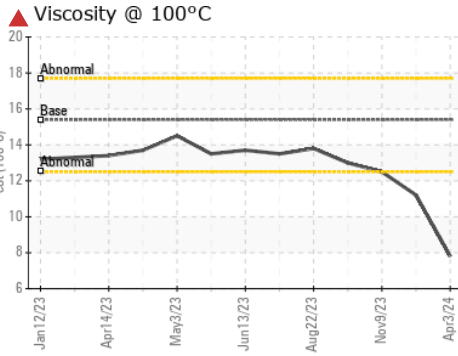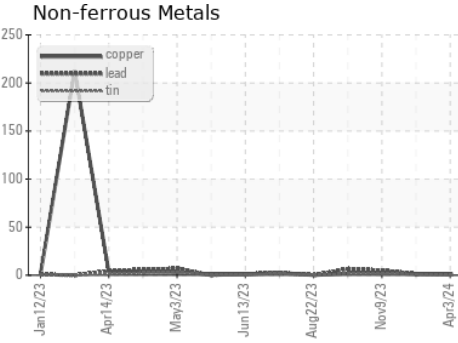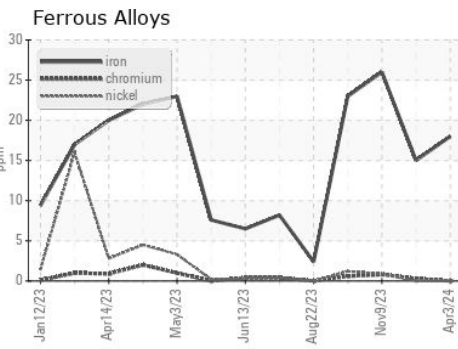

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0092438 **Received** : 05 Apr 2024
Lab Number : 06139741 **Tested** : 09 Apr 2024
Unique Number : 10964549 **Diagnosed** : 09 Apr 2024 - Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 172 - Montgomery-Alexander City-Tallahassee
 Multiple Sites
 Montgomery, AL
 US 36108
 Contact: RICHARD HATFIELD
 rhatfield@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)