


# OIL ANALYSIS REPORT

Area  
**NAT CUTS [98824671]**  
 Machine Id  
**LINE 12 CUBER**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

Sample Rating Trend

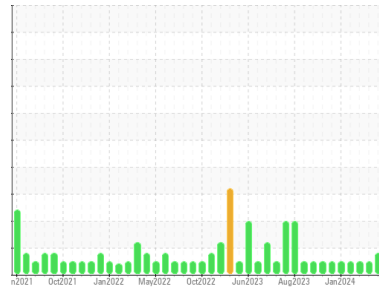

## DIAGNOSIS

- Recommendation**  
No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**  
All component wear rates are normal.
- Contamination**  
There is a high amount of silt (particulates < 14 microns in size) present in the oil.
- Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0114291</b>	PCA0114271	PCA0114270
Sample Date	Client Info	<b>25 Mar 2024</b>	15 Feb 2024	13 Feb 2024
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	Filtered
Sample Status		<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<b>1</b>	1	2
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >20	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Lead	ppm ASTM D5185m >20	<b>&lt;1</b>	0	<1
Copper	ppm ASTM D5185m >20	<b>7</b>	6	8
Tin	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 5	<b>0</b>	0	0
Barium	ppm ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 5	<b>0</b>	0	0
Manganese	ppm ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm ASTM D5185m 25	<b>&lt;1</b>	0	0
Calcium	ppm ASTM D5185m 200	<b>0</b>	0	0
Phosphorus	ppm ASTM D5185m 300	<b>352</b>	426	371
Zinc	ppm ASTM D5185m 370	<b>0</b>	26	22
Sulfur	ppm ASTM D5185m 2500	<b>799</b>	973	836

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>2</b>	3	4
Sodium	ppm ASTM D5185m	<b>0</b>	<1	<1
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1

## FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>▲ 11542</b>	312	3914
Particles >6µm	ASTM D7647 >1300	<b>1111</b>	119	610
Particles >14µm	ASTM D7647 >320	<b>57</b>	17	54
Particles >21µm	ASTM D7647 >80	<b>14</b>	3	8
Particles >38µm	ASTM D7647 >20	<b>0</b>	0	0
Particles >71µm	ASTM D7647 >4	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/15	<b>▲ 21/17/13</b>	15/14/11	19/16/13

## FLUID DEGRADATION


method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 0.57	<b>0.22</b>	0.22	0.19

# OIL ANALYSIS REPORT


**▲ Particle Trend**

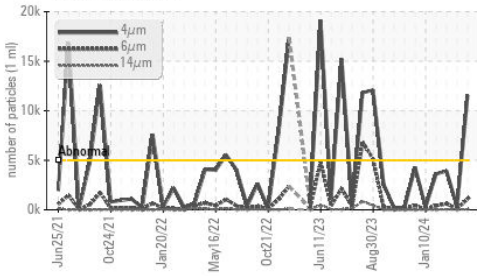


**▲ Particle Trend**

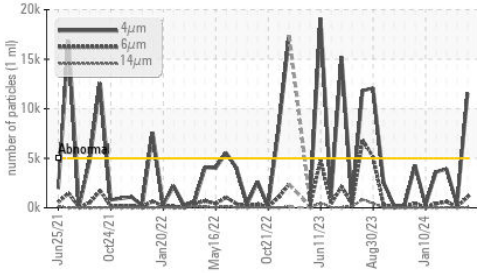

**Acid Number**

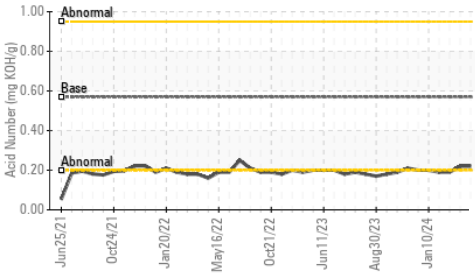


**Viscosity @ 40°C**

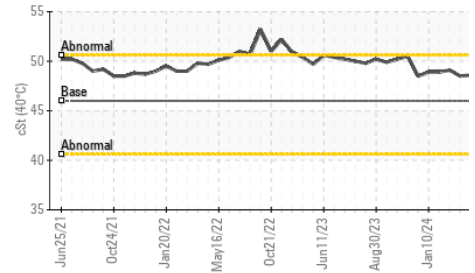






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	<b>48.6</b>	48.5	49.1

**SAMPLE IMAGES**

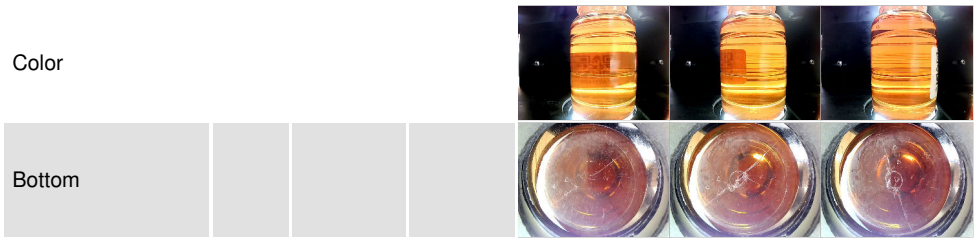

**GRAPHS**

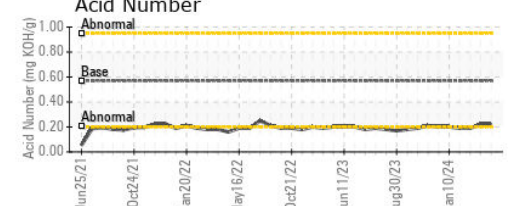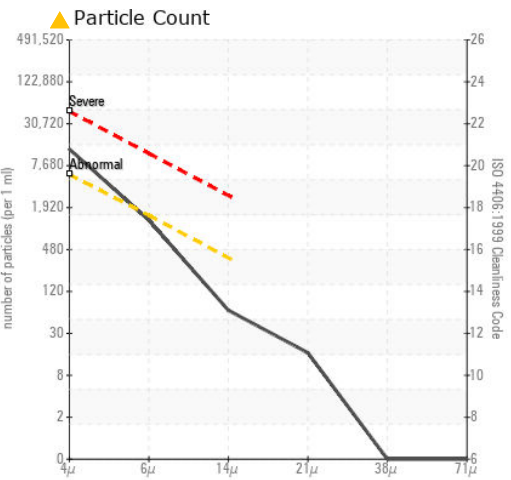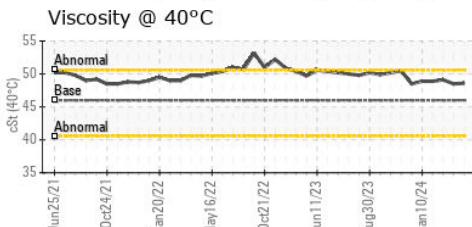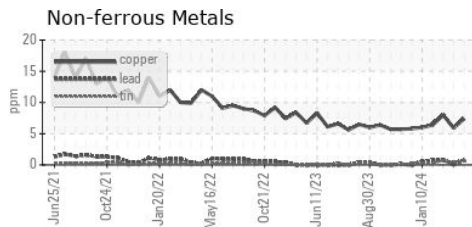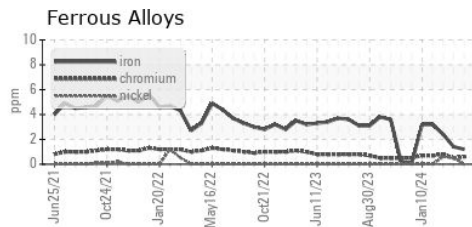

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0114291  
**Lab Number** : **06139875**  
**Unique Number** : 10964683  
**Test Package** : IND 2

**Received** : 05 Apr 2024  
**Tested** : 08 Apr 2024  
**Diagnosed** : 08 Apr 2024 - Don Baldrige

**KraftHeinz - Springfield - Plant 8311 PCA**  
 2035 E BENNETT  
 SPRINGFIELD, MO  
 US 65804  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)