




OIL ANALYSIS REPORT

Sample Rating Trend

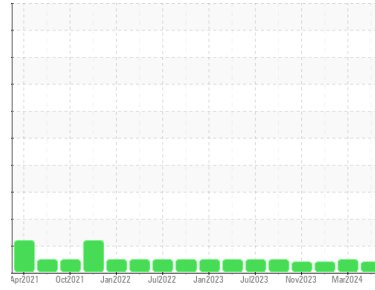

VISCOSITY



Machine Id
420009-1310

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (46 QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0110340	GFL0110296	GFL0102765
Sample Date	Client Info		02 Apr 2024	05 Mar 2024	29 Dec 2023
Machine Age	hrs	Client Info	9018	8878	8443
Oil Age	hrs	Client Info	580	436	582
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			ATTENTION	NORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	14	8	7
Chromium	ppm	ASTM D5185m	>20	1	<1	0
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	4	3	<1
Lead	ppm	ASTM D5185m	>40	1	<1	<1
Copper	ppm	ASTM D5185m	>330	1	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	7	4	12
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	64	57	62
Manganese	ppm	ASTM D5185m	0	<1	0	0
Magnesium	ppm	ASTM D5185m	1010	933	864	930
Calcium	ppm	ASTM D5185m	1070	1140	1009	1127
Phosphorus	ppm	ASTM D5185m	1150	1088	917	992
Zinc	ppm	ASTM D5185m	1270	1249	1149	1223
Sulfur	ppm	ASTM D5185m	2060	3186	2828	3062

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	4	3	3
Sodium	ppm	ASTM D5185m		3	4	2
Potassium	ppm	ASTM D5185m	>20	6	4	1
Fuel	%	ASTM D3524	>2.0	<1.0	<1.0	<1.0

INFRA-RED





	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.4	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.3	7.3	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	18.2	18.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	14.1	13.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.5	7.6	7.7







OIL ANALYSIS REPORT

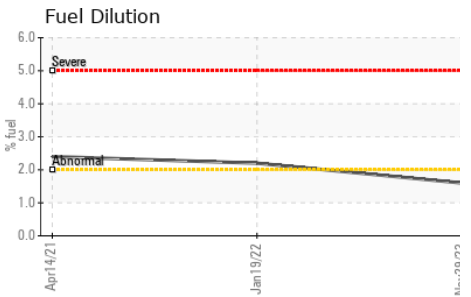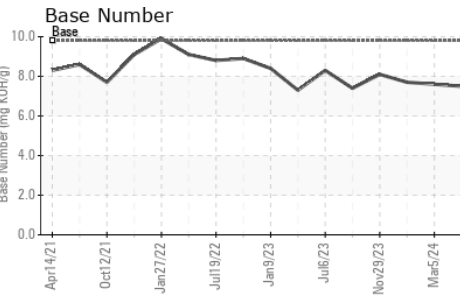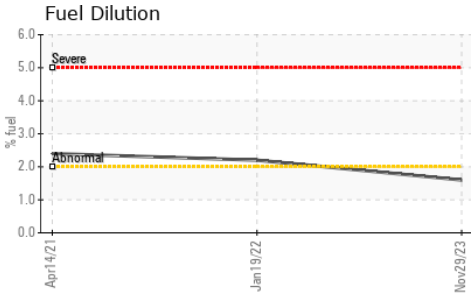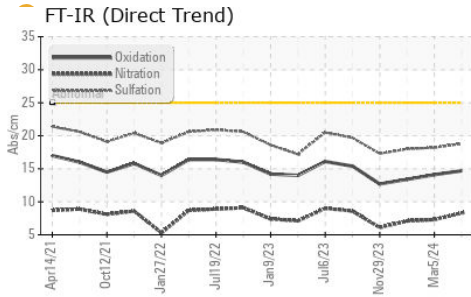

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.2	12.6

GRAPHS

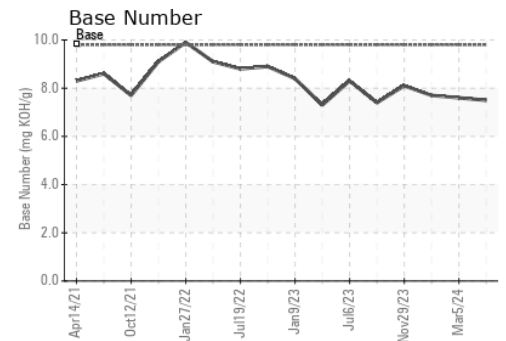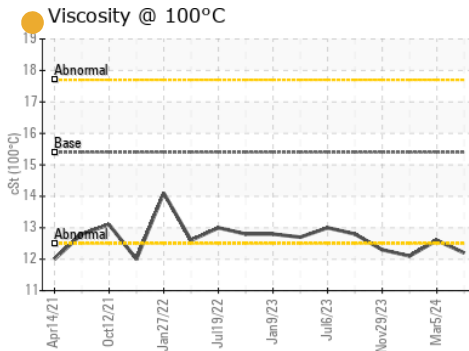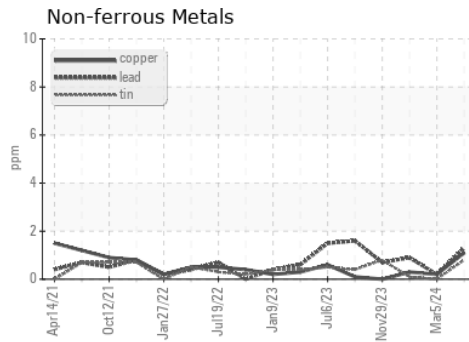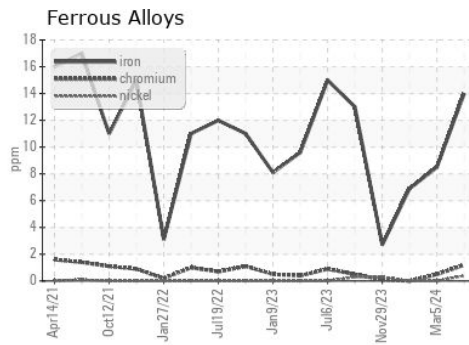

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0110340

Lab Number : 06140558

Unique Number : 10965366

Test Package : FLEET (Additional Tests : FuelDilution)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 05 Apr 2024

Tested : 08 Apr 2024

Diagnosed : 09 Apr 2024 - Don Baldrige

GFL Environmental - 622 - Traverse City Hauling

160 Hughes Dr

Traverse City, MI

US 49686

Contact: GARY BREWER

T:

F: