


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

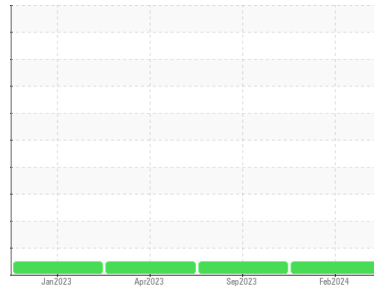

Area
(37849Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A62517
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PCA0115829 | PCA0096028 | PCA0092818 |
| Sample Date | Client Info | | | 21 Feb 2024 | 06 Sep 2023 | 18 Apr 2023 |
| Machine Age | mls | Client Info | | 256489 | 62517 | 161458 |
| Oil Age | mls | Client Info | | 50000 | 50000 | 30000 |
| Oil Changed | Client Info | | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | | NEG | NEG | NEG |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >110 | 39 | 21 | 22 |
| Chromium | ppm | ASTM D5185m | >4 | 1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | <1 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 15 | 7 | 5 |
| Lead | ppm | ASTM D5185m | >45 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >85 | 7 | 4 | 2 |
| Tin | ppm | ASTM D5185m | >4 | 1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | <1 | 0 | 0 |




| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 2 | 3 | 2 | 1 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 50 | 67 | 66 | 63 |
| Manganese | ppm | ASTM D5185m | 0 | 1 | 1 | <1 |
| Magnesium | ppm | ASTM D5185m | 950 | 1006 | 988 | 902 |
| Calcium | ppm | ASTM D5185m | 1050 | 1205 | 1144 | 1140 |
| Phosphorus | ppm | ASTM D5185m | 995 | 1179 | 1077 | 1015 |
| Zinc | ppm | ASTM D5185m | 1180 | 1346 | 1294 | 1259 |
| Sulfur | ppm | ASTM D5185m | 2600 | 3088 | 3435 | 2600 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >30 | 9 | 7 | 5 |
| Sodium | ppm | ASTM D5185m | | 2 | 5 | <1 |
| Potassium | ppm | ASTM D5185m | >20 | 27 | 17 | 19 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >3 | 0.8 | 0.6 | 0.6 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 10.5 | 10.0 | 9.6 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 22.7 | 21.8 | 21.0 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 19.3 | 18.7 | 18.6 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 6.3 | 5.8 | 4.8 |





OIL ANALYSIS REPORT

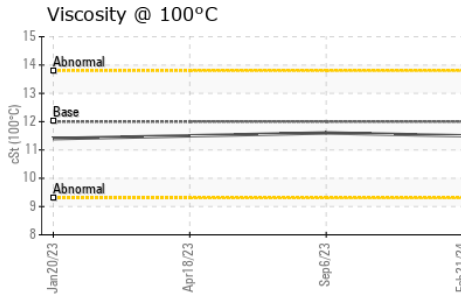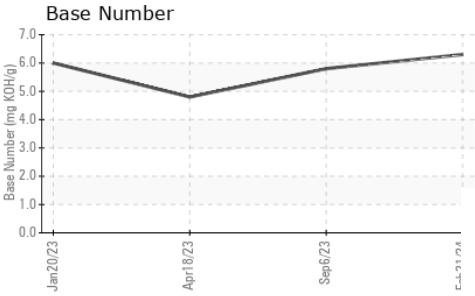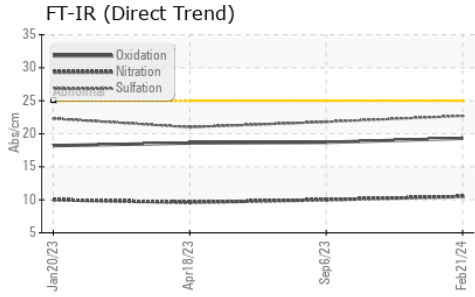

| PARAMETER | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 12.00 | 11.5 | 11.6 |

GRAPHS

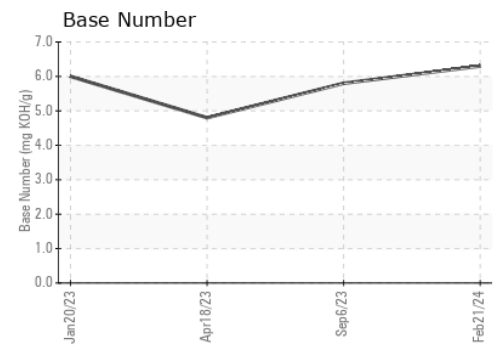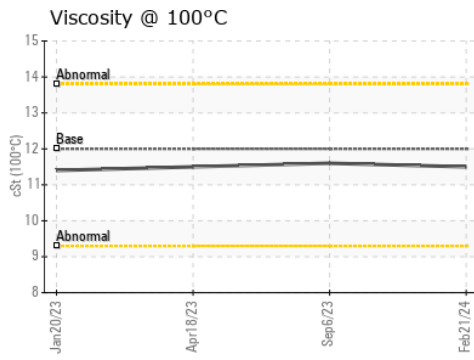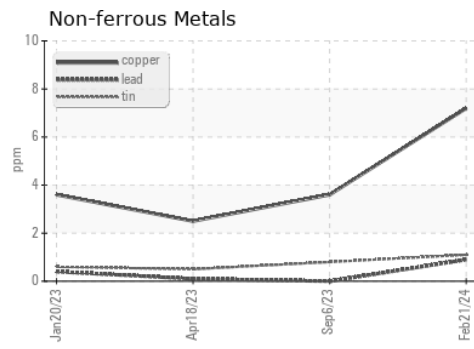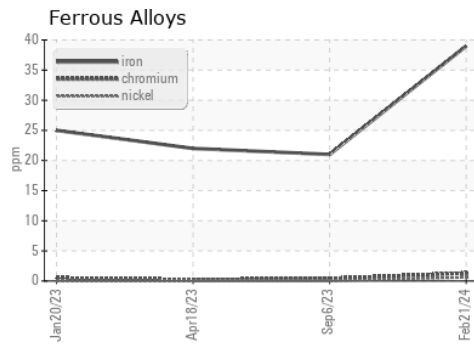

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0115829 **Received** : 05 Apr 2024
Lab Number : **06140580** **Tested** : 08 Apr 2024
Unique Number : 10965388 **Diagnosed** : 08 Apr 2024 - Wes Davis
Test Package : FLEET

Transervice - Shop 1370 - Berkeley-Perrysburg
 28727 Oregon Road
 Perrysburg, OH
 US 43551
 Contact: Curtis Hart
 chart@transervice.com
 T: (419)666-3277
 F: (419)666-3279

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)