


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

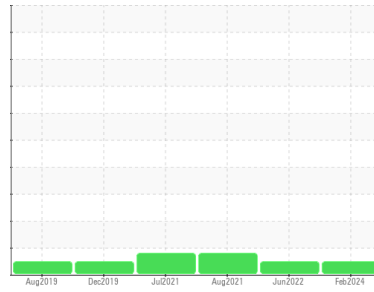

Machine Id
303465
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0119404	PCA0061065	PCA0042040
Sample Date	Client Info		29 Feb 2024	27 Jun 2022	07 Aug 2021
Machine Age	mls	Client Info	153743	101401	81503
Oil Age	mls	Client Info	26450	19898	13449
Oil Changed	Client Info		Not Chngd	Changed	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	31	40	63
Chromium	ppm	ASTM D5185m >20	<1	1	2
Nickel	ppm	ASTM D5185m >4	<1	0	<1
Titanium	ppm	ASTM D5185m	7	<1	1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	12	14	▲ 28
Lead	ppm	ASTM D5185m >40	0	<1	<1
Copper	ppm	ASTM D5185m >330	2	3	6
Tin	ppm	ASTM D5185m >15	<1	<1	2
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	4	12	15
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 50	58	56	49
Manganese	ppm	ASTM D5185m 0	<1	<1	1
Magnesium	ppm	ASTM D5185m 950	951	825	708
Calcium	ppm	ASTM D5185m 1050	1229	1154	1211
Phosphorus	ppm	ASTM D5185m 995	1071	844	818
Zinc	ppm	ASTM D5185m 1180	1240	1070	1056
Sulfur	ppm	ASTM D5185m 2600	3652	3383	2065

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	4	4
Sodium	ppm	ASTM D5185m	3	2	5
Potassium	ppm	ASTM D5185m >20	8	8	30




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.9	0.9	1
Nitration	Abs/cm	*ASTM D7624 >20	12.4	12.9	13.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.6	24.6	26.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.4	20.3	24.5
Base Number (BN)	mg KOH/g	ASTM D2896	6.5	7.6	---









OIL ANALYSIS REPORT

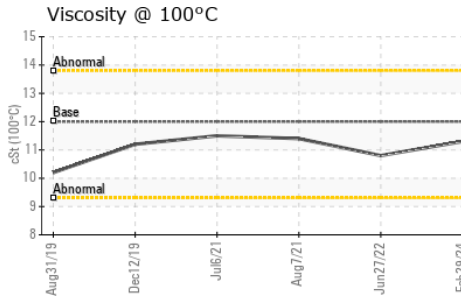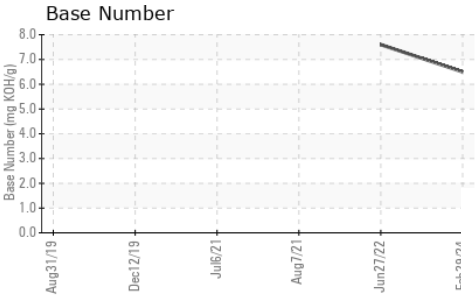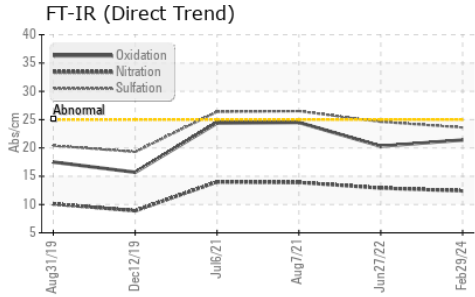

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	10.8	11.4

GRAPHS

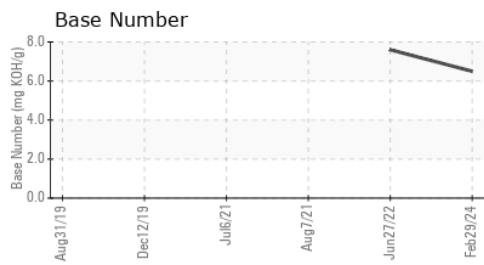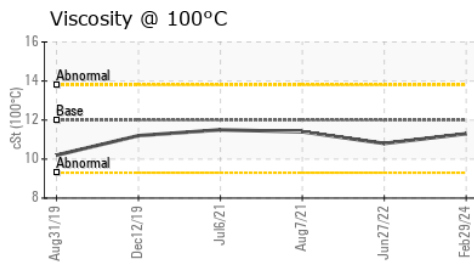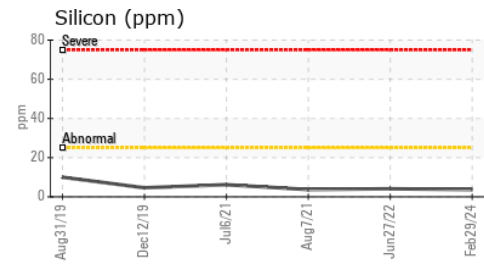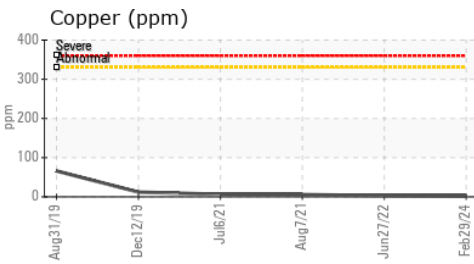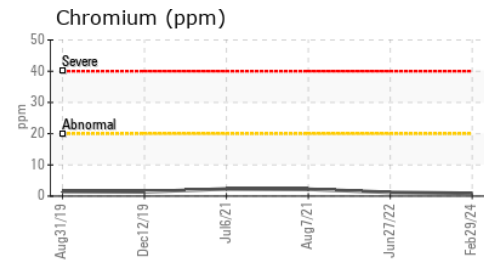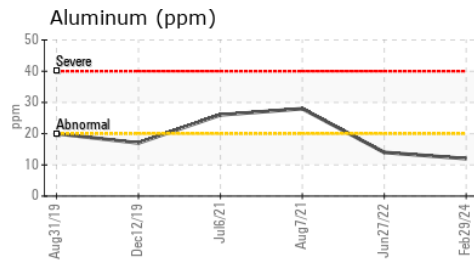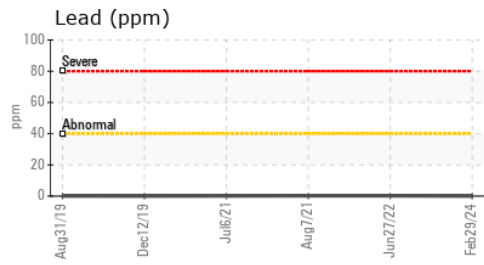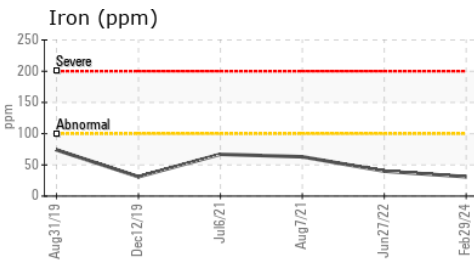

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0119404 **Received** : 08 Apr 2024
Lab Number : 06140805 **Tested** : 08 Apr 2024
Unique Number : 10965613 **Diagnosed** : 08 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #123
 66 KELLER AVENUE
 LANCASTER, PA
 US 17601
 Contact: RON ROBERTS
 roberts@millertransgroup.com
 T: (717)945-6205
 F: (717)945-5818

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)