




# OIL ANALYSIS REPORT



Area  
**(61AATE6)**  
Machine Id  
**214010**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### Sample Rating Trend

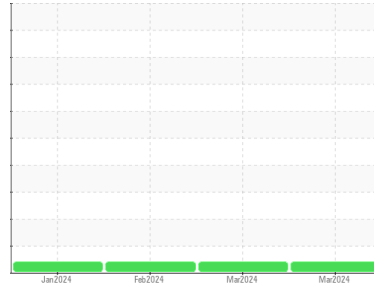

### VISCOSITY



### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0113712</b>	GFL0115816	GFL0113684
Sample Date	Client Info		<b>29 Mar 2024</b>	08 Mar 2024	21 Feb 2024
Machine Age	hrs	Client Info	<b>531</b>	392	287
Oil Age	hrs	Client Info	<b>531</b>	0	0
Oil Changed		Client Info	<b>Changed</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	ATTENTION	ATTENTION

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>66</b>	57	50
Chromium	ppm	ASTM D5185m >20	<b>2</b>	1	1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	6	5
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>77</b>	81	63
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>41</b>	44	49
Barium	ppm	ASTM D5185m 0	<b>0</b>	4	5
Molybdenum	ppm	ASTM D5185m 60	<b>42</b>	42	40
Manganese	ppm	ASTM D5185m 0	<b>5</b>	5	5
Magnesium	ppm	ASTM D5185m 1010	<b>581</b>	515	548
Calcium	ppm	ASTM D5185m 1070	<b>1661</b>	1457	1599
Phosphorus	ppm	ASTM D5185m 1150	<b>791</b>	689	742
Zinc	ppm	ASTM D5185m 1270	<b>934</b>	846	869
Sulfur	ppm	ASTM D5185m 2060	<b>2624</b>	2148	2318

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>25</b>	26	23
Sodium	ppm	ASTM D5185m	<b>6</b>	4	6
Potassium	ppm	ASTM D5185m >20	<b>8</b>	9	5

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.9</b>	8.9	7.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.6</b>	21.8	22.0

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>23.0</b>	21.8	20.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.6</b>	8.4	9.2







# OIL ANALYSIS REPORT

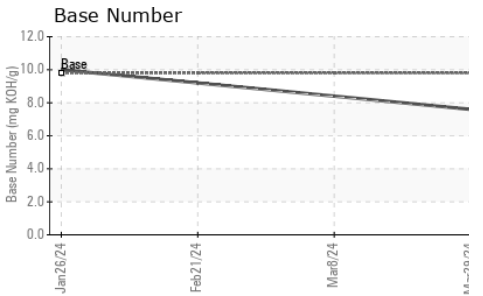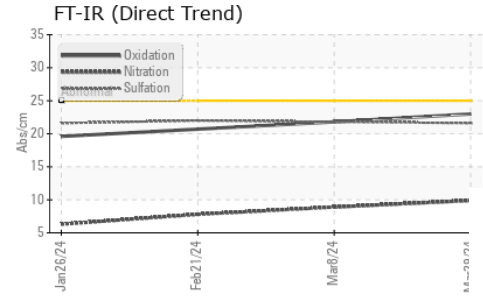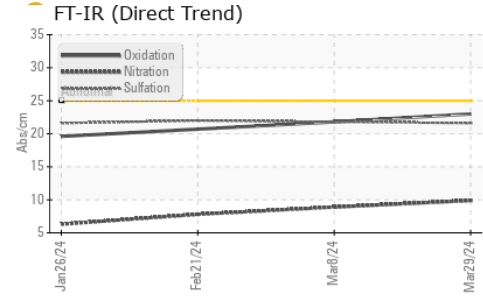

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	● 11.3	● 11.2

### GRAPHS

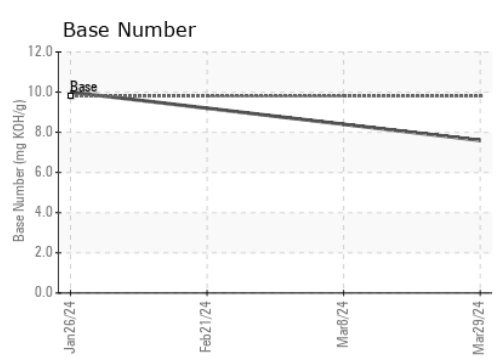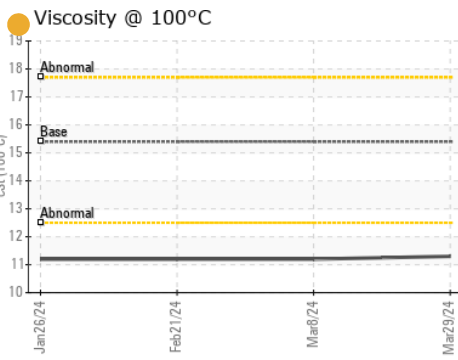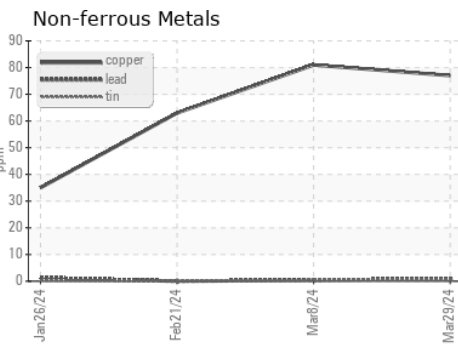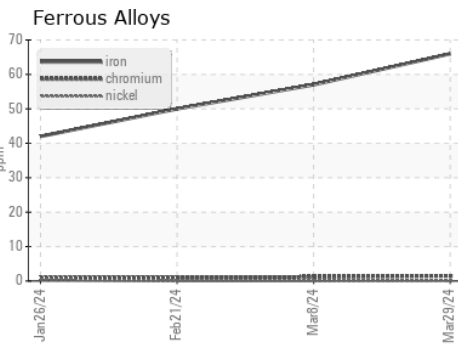

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0113712      **Received** : 08 Apr 2024  
**Lab Number** : 06140826      **Tested** : 08 Apr 2024  
**Unique Number** : 10965634      **Diagnosed** : 10 Apr 2024 - Sean Felton  
**Test Package** : FLEET

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)  
 13737 Plant Rd  
 Childersburg, AL 35044  
 Contact: JONATHAN WILLIAMS  
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)