




OIL ANALYSIS REPORT

Sample Rating Trend

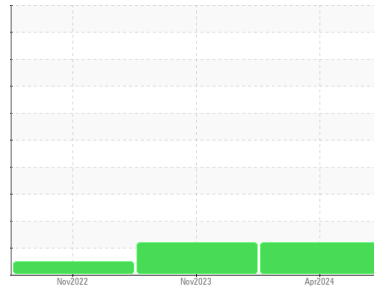

DEGRADATION



Machine Id

940004

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The BN level is low.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0108391	GFL0086721	GFL0060641
Sample Date	Client Info		03 Apr 2024	09 Nov 2023	16 Nov 2022
Machine Age	hrs	Client Info	12222	11090	8663
Oil Age	hrs	Client Info	1132	11090	8663
Oil Changed	Client Info		Changed	Changed	Not Changed
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	12	21	12
Chromium	ppm	ASTM D5185m >4	2	4	2
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	6	3
Lead	ppm	ASTM D5185m >45	5	20	4
Copper	ppm	ASTM D5185m >85	3	11	1
Tin	ppm	ASTM D5185m >4	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	9	6	10
Barium	ppm	ASTM D5185m 0	0	<1	0
Molybdenum	ppm	ASTM D5185m 60	55	61	54
Manganese	ppm	ASTM D5185m 0	<1	1	<1
Magnesium	ppm	ASTM D5185m 1010	625	713	599
Calcium	ppm	ASTM D5185m 1070	1834	1897	1699
Phosphorus	ppm	ASTM D5185m 1150	841	860	762
Zinc	ppm	ASTM D5185m 1270	1050	1110	997
Sulfur	ppm	ASTM D5185m 2060	2967	2458	2666

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	6	8	6
Sodium	ppm	ASTM D5185m	7	11	7
Potassium	ppm	ASTM D5185m >20	0	1	0

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	12.6	16.3	13.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	26.8	33.6	27.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	24.7	34.8	24.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	▲ 3.1	▲ 1.0	4.9







OIL ANALYSIS REPORT

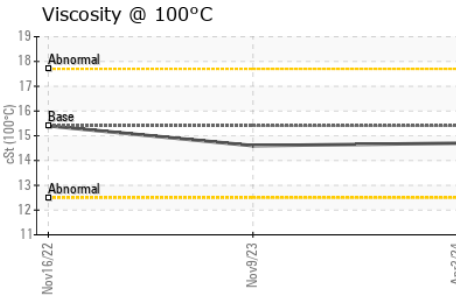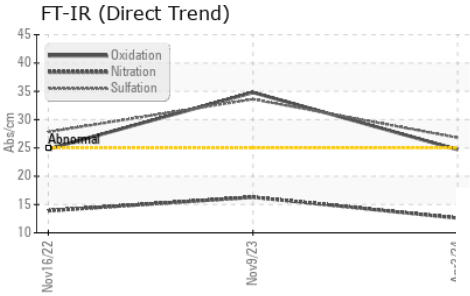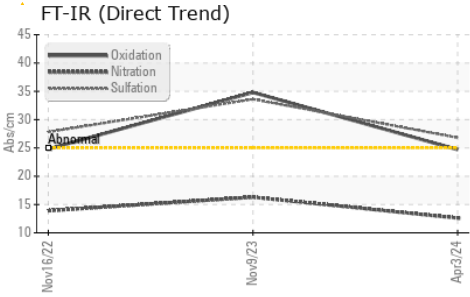

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.7	14.6

GRAPHS

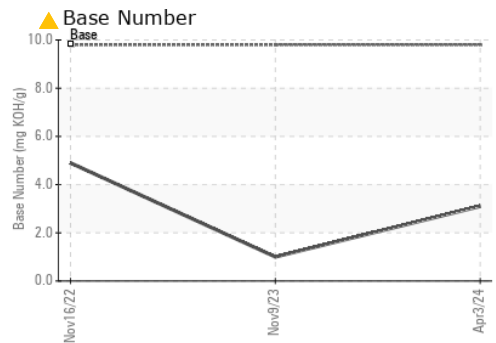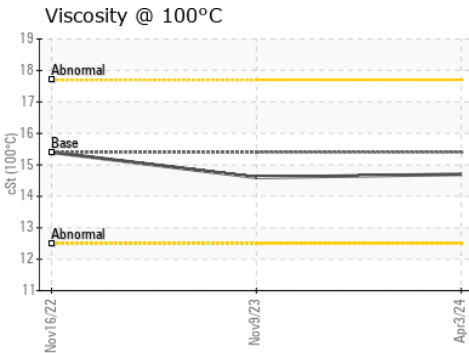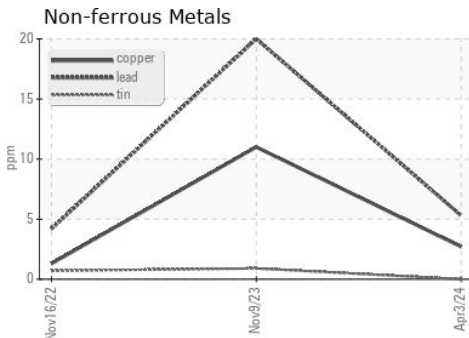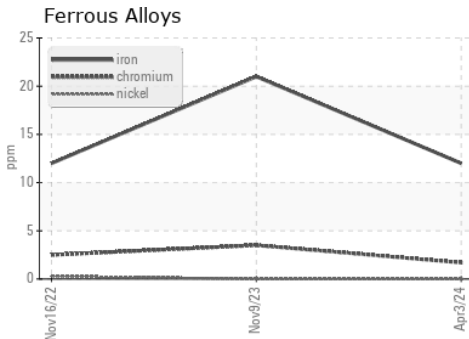

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0108391
Lab Number : 06140828
Unique Number : 10965636
Test Package : FLEET

GFL Environmental - 932 - Muskego HC
 W144 S6400 College Ct.
 Muskego, WI
 US 53150

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Brian Schlomann
 brian.schlomann@gflenv.com
 T: (262)510-4586

F: