



OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Machine Id
413161
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

▲ Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

● Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0102244	---	---
Sample Date	Client Info	26 Mar 2024	---	---
Machine Age	hrs	0	---	---
Oil Age	hrs	600	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	▲ 126	---	---
Chromium	ppm ASTM D5185m >5	6	---	---
Nickel	ppm ASTM D5185m >4	0	---	---
Titanium	ppm ASTM D5185m >2	0	---	---
Silver	ppm ASTM D5185m >2	0	---	---
Aluminum	ppm ASTM D5185m >15	34	---	---
Lead	ppm ASTM D5185m >25	0	---	---
Copper	ppm ASTM D5185m >100	7	---	---
Tin	ppm ASTM D5185m >4	<1	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	40	---	---
Barium	ppm ASTM D5185m 0	0	---	---
Molybdenum	ppm ASTM D5185m 60	57	---	---
Manganese	ppm ASTM D5185m 0	3	---	---
Magnesium	ppm ASTM D5185m 1010	606	---	---
Calcium	ppm ASTM D5185m 1070	1804	---	---
Phosphorus	ppm ASTM D5185m 1150	886	---	---
Zinc	ppm ASTM D5185m 1270	1012	---	---
Sulfur	ppm ASTM D5185m 2060	3093	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	13	---	---
Sodium	ppm ASTM D5185m	4	---	---
Potassium	ppm ASTM D5185m >20	108	---	---
Fuel	% ASTM D3524 >3.0	0.9	---	---

INFRA-RED






method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.6	---	---
Nitration	Abs/cm *ASTM D7624 >20	10.1	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	21.8	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.6	---	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.1	---	---







OIL ANALYSIS REPORT

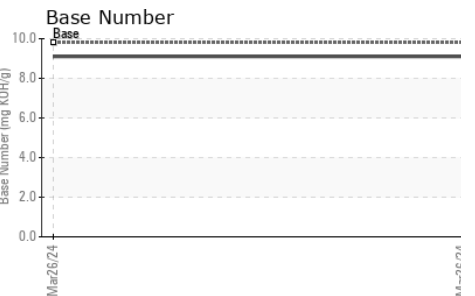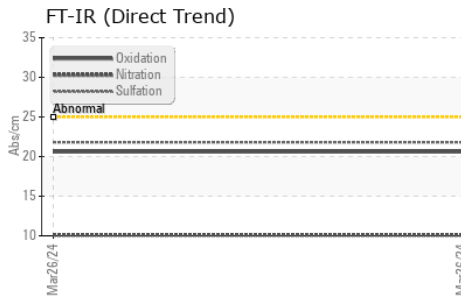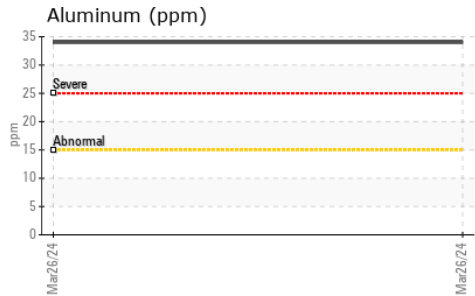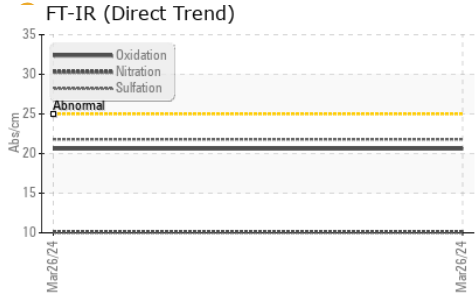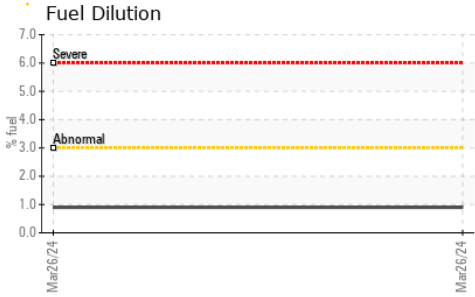

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	● 9.8	---

GRAPHS

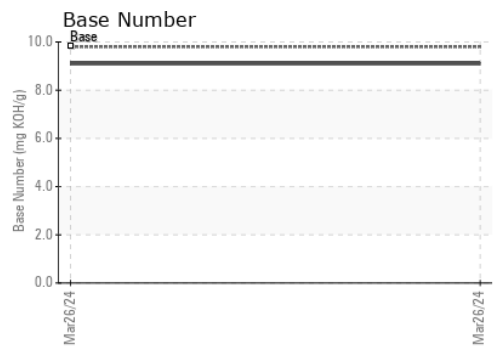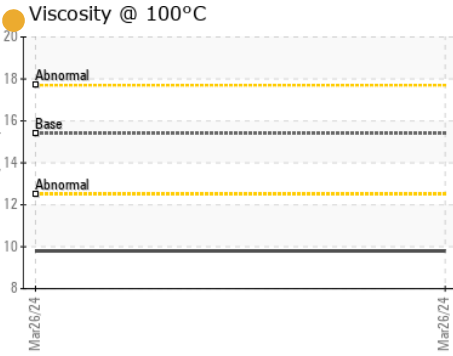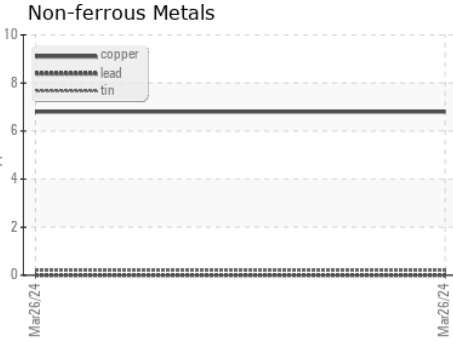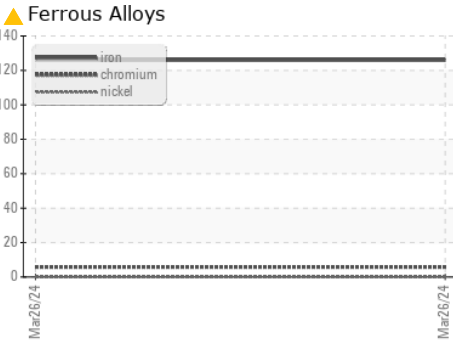

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0102244 **Received** : 08 Apr 2024
Lab Number : 06140850 **Tested** : 15 Apr 2024
Unique Number : 10965658 **Diagnosed** : 15 Apr 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 859 - Bay City
 700 Avenue F
 Bay City, TX
 US 77414
 Contact: JONATHON BROWN
 jonathon.brown@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)