


# **OIL ANALYSIS REPORT**

# (71236Z) Walgreens - Tractor [Walgreens - Tractor] 136A624088

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (11 0

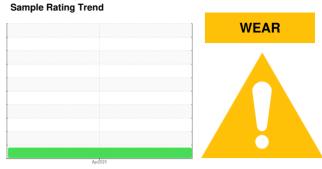

#### **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

AL)				Apr2024		
ŕ						
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0123043		
Sample Date		Client Info		02 Apr 2024		
Machine Age	mls	Client Info		31028		
Oil Age	mls	Client Info		31028		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
CONTAMINAT	TION	method	limit/base	current	history1	history2
<sup>=</sup> uel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	_S	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>80	44		
Chromium	ppm	ASTM D5185m	>5	3		
Nickel	ppm	ASTM D5185m	>2	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>30	37		
ead	ppm	ASTM D5185m	>30	1		
Copper	ppm	ASTM D5185m	>150	<u> </u>		
- Tin	ppm	ASTM D5185m	>5	3		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	32		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	43		
Manganese	ppm	ASTM D5185m	0	4		
Magnesium	ppm	ASTM D5185m	950	589		
Calcium	ppm	ASTM D5185m	1050	1769		
Phosphorus	ppm	ASTM D5185m	995	765		
Zinc	ppm	ASTM D5185m	1180	931		
Sulfur	ppm	ASTM D5185m	2600	2494		
CONTAMINAN	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6		
Sodium	ppm	ASTM D5185m		7		
Potassium	ppm	ASTM D5185m	>20	95		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5		
Nitration	Abs/cm	*ASTM D7624	>20	9.1		
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm		>25	22.2		
Base Number (BN)	mg KOH/g			7.9		
Dade Number (DIN)	ilig Norlig	AOTIVI DZ030		1.5		



# **OIL ANALYSIS REPORT**

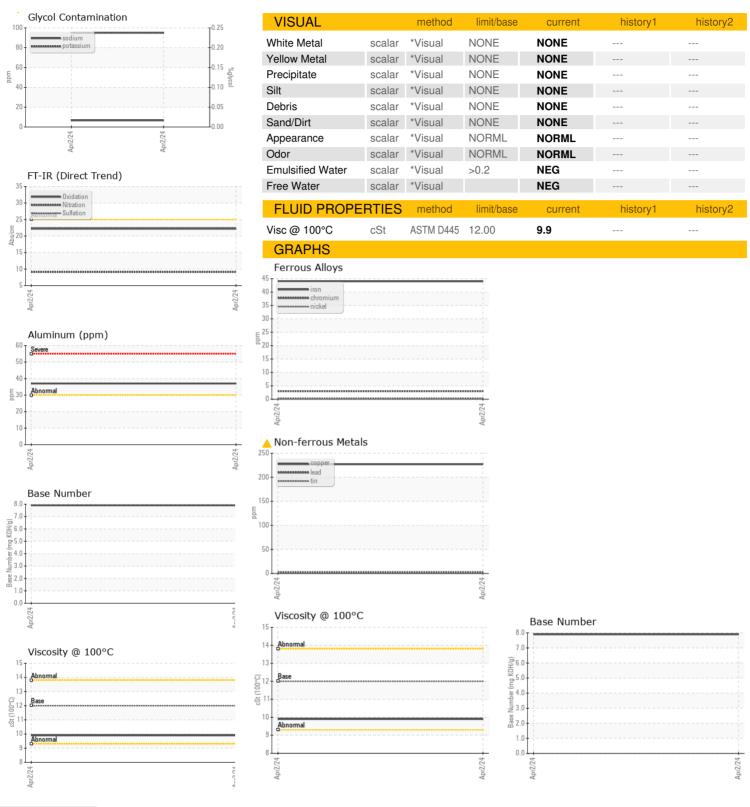



Certificate 12367

Laboratory Sample No.

: PCA0123043 Lab Number : 06141988 Unique Number : 10966796 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 08 Apr 2024 Tested : 09 Apr 2024 Diagnosed

: 10 Apr 2024 - Don Baldridge

Transervice - Shop 1376 - Berkeley-Linden

3425 Tremley Point Road Linden, NJ US 07036

Contact: Shop 1376 Oil Analysis shop1376@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: