


OIL ANALYSIS REPORT

Sample Rating Trend

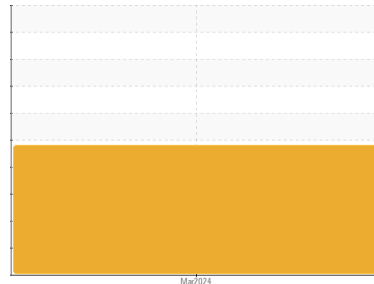

Area
(P1103991) Somerset Service-D-TRUCK
 Machine Id
[Somerset Service-D-TRUCK] 248D9563
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (5 GAL)

DIAGNOSIS

- Recommendation**
 We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.
- Wear**
 Cylinder, crank, or cam shaft wear is indicated.
- Contamination**
 Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.
- Fluid Condition**
 The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-----------------|------------|--------------------|----------|----------|
| Sample Number | Client Info | | PCA0116515 | --- | --- |
| Sample Date | Client Info | | 22 Mar 2024 | --- | --- |
| Machine Age | mls Client Info | | 138919 | --- | --- |
| Oil Age | mls Client Info | | 30921 | --- | --- |
| Oil Changed | Client Info | | Changed | --- | --- |
| Sample Status | | | ABNORMAL | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | <1.0 | --- | --- |
| Water | WC Method | >0.2 | NEG | --- | --- |
| Glycol | WC Method | | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|-----------------|------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m | >80 | ▲ 174 | --- | --- |
| Chromium | ppm ASTM D5185m | >5 | ▲ 7 | --- | --- |
| Nickel | ppm ASTM D5185m | >2 | ▲ 3 | --- | --- |
| Titanium | ppm ASTM D5185m | | <1 | --- | --- |
| Silver | ppm ASTM D5185m | >3 | 0 | --- | --- |
| Aluminum | ppm ASTM D5185m | >30 | ● 24 | --- | --- |
| Lead | ppm ASTM D5185m | >30 | 0 | --- | --- |
| Copper | ppm ASTM D5185m | >150 | 8 | --- | --- |
| Tin | ppm ASTM D5185m | >5 | <1 | --- | --- |
| Vanadium | ppm ASTM D5185m | | 0 | --- | --- |
| Cadmium | ppm ASTM D5185m | | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|-----------------|------------|-------------|----------|----------|
| Boron | ppm ASTM D5185m | 2 | 6 | --- | --- |
| Barium | ppm ASTM D5185m | 0 | 0 | --- | --- |
| Molybdenum | ppm ASTM D5185m | 50 | 65 | --- | --- |
| Manganese | ppm ASTM D5185m | 0 | 2 | --- | --- |
| Magnesium | ppm ASTM D5185m | 950 | 1011 | --- | --- |
| Calcium | ppm ASTM D5185m | 1050 | 1300 | --- | --- |
| Phosphorus | ppm ASTM D5185m | 995 | 1024 | --- | --- |
| Zinc | ppm ASTM D5185m | 1180 | 1327 | --- | --- |
| Sulfur | ppm ASTM D5185m | 2600 | 3260 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|-----------------|------------|-------------|----------|----------|
| Silicon | ppm ASTM D5185m | >20 | ▲ 37 | --- | --- |
| Sodium | ppm ASTM D5185m | | 8 | --- | --- |
| Potassium | ppm ASTM D5185m | >20 | 22 | --- | --- |






INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------------------|------------|-------------|----------|----------|
| Soot % | % *ASTM D7844 | >3 | 1.2 | --- | --- |
| Nitration | Abs/cm *ASTM D7624 | >20 | 11.6 | --- | --- |
| Sulfation | Abs/.1mm *ASTM D7415 | >30 | 23.0 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm *ASTM D7414 | >25 | 19.6 | --- | --- |
| Base Number (BN) | mg KOH/g ASTM D2896 | | 6.6 | --- | --- |






OIL ANALYSIS REPORT

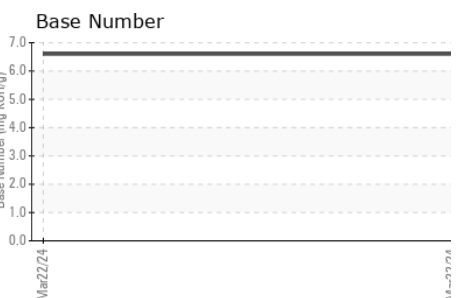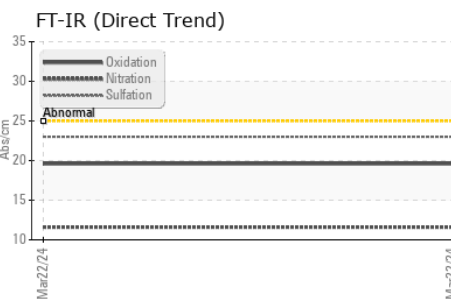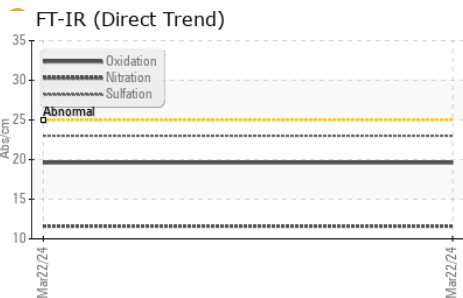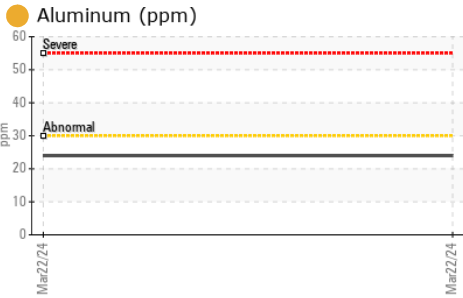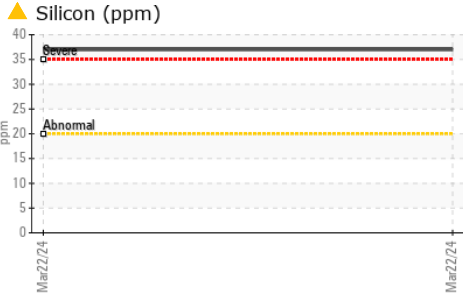

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 12.00 | 11.3 | --- |

GRAPHS

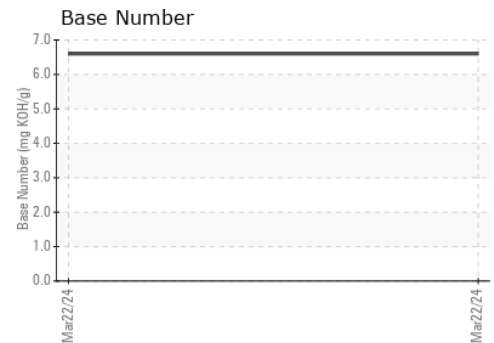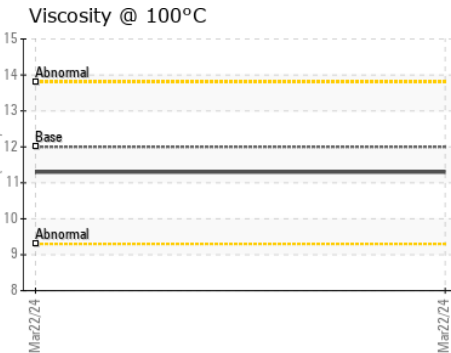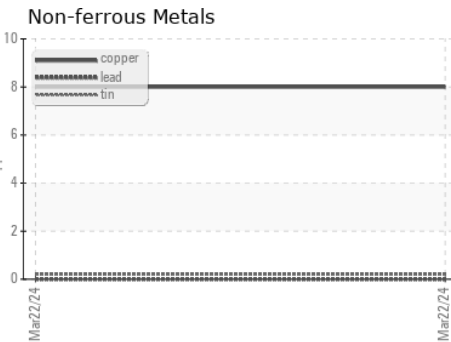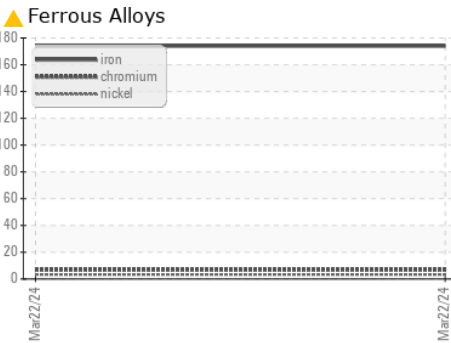

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116515 **Received** : 08 Apr 2024
Lab Number : 06141989 **Tested** : 15 Apr 2024
Unique Number : 10966797 **Diagnosed** : 15 Apr 2024 - Sean Felton
Test Package : FLEET

Transervice - Shop 2480 - Somerset Service
 606 E. Bourne Avenue
 Somerset, KY
 US 42501
 Contact: Bart Beshears
 Shop2480@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)