


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

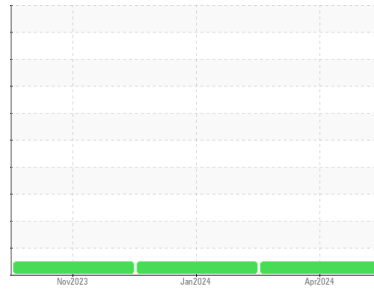

Area  
**(P1021288) Dixon Transport-Tractor**  
 Machine Id  
**[Dixon Transport-Tractor] 325A325549**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0121206</b>	PCA0114338	PCA0109481
Sample Date	Client Info			<b>01 Apr 2024</b>	26 Jan 2024	03 Nov 2023
Machine Age	mls Client Info			<b>494155</b>	474505	455197
Oil Age	mls Client Info			<b>38958</b>	19308	33994
Oil Changed	Client Info			<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>25</b>	14	19
Chromium	ppm	ASTM D5185m	>5	<b>3</b>	2	2
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	<1	1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>10</b>	6	4
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>150	<b>7</b>	4	6
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>4</b>	9	<1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	9
Molybdenum	ppm	ASTM D5185m	50	<b>61</b>	61	61
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>1026</b>	959	950
Calcium	ppm	ASTM D5185m	1050	<b>1192</b>	1100	1188
Phosphorus	ppm	ASTM D5185m	995	<b>1080</b>	1018	1008
Zinc	ppm	ASTM D5185m	1180	<b>1337</b>	1222	1267
Sulfur	ppm	ASTM D5185m	2600	<b>3296</b>	2932	3050

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>6</b>	4	6
Sodium	ppm	ASTM D5185m		<b>2</b>	2	0
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	7.7	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.0</b>	18.3	21.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.0</b>	14.9	18.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.6</b>	5.7	6.5





# OIL ANALYSIS REPORT

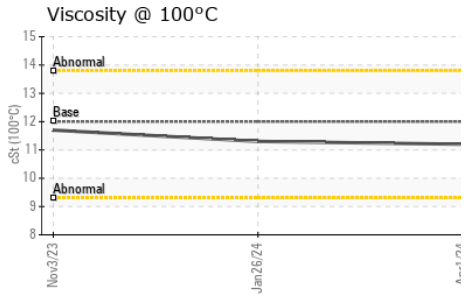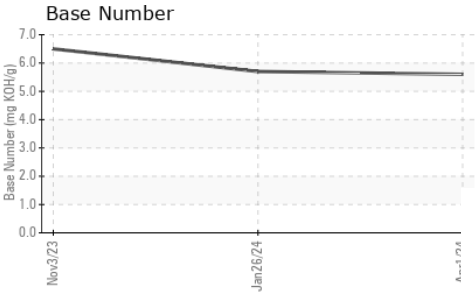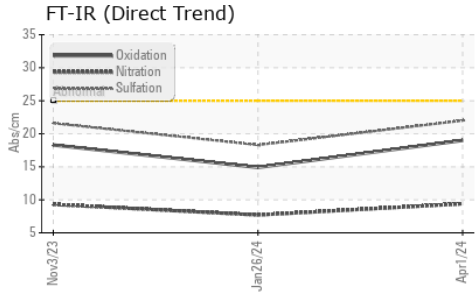

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	11.3

## GRAPHS

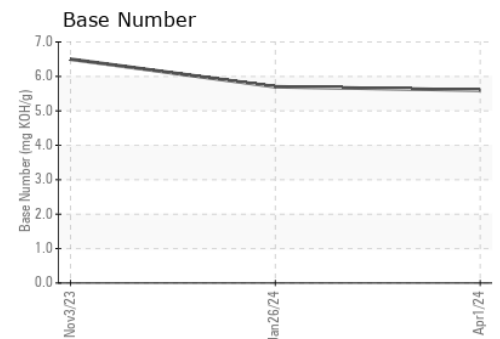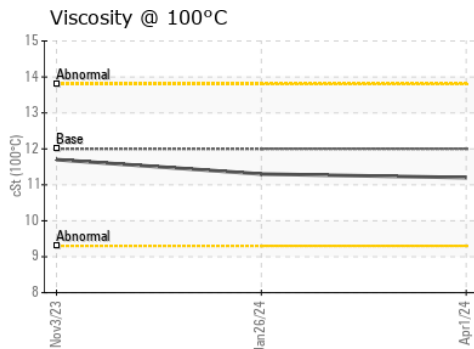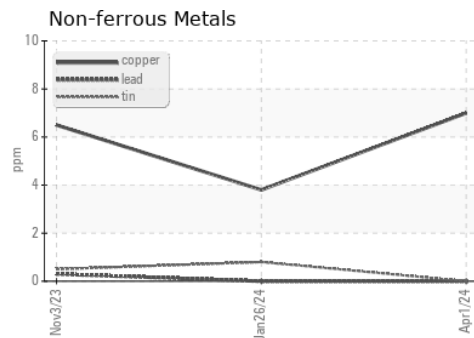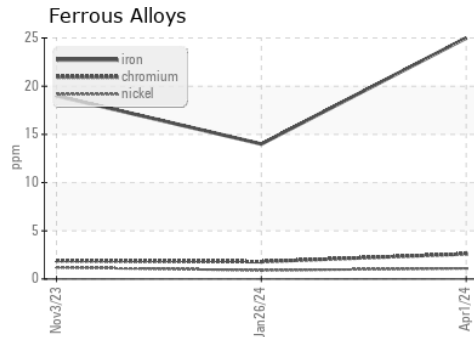

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0121206  
**Lab Number** : 06142016  
**Unique Number** : 10966824  
**Test Package** : FLEET

**Received** : 08 Apr 2024  
**Tested** : 09 Apr 2024  
**Diagnosed** : 09 Apr 2024 - Wes Davis

**Transervice - Shop 3250 - Dixon Transport**  
 1124 E. River Road  
 Dixon, IL  
 US 61021

Contact: Mike Shoemaker  
 Shop3250@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: