




OIL ANALYSIS REPORT

Sample Rating Trend

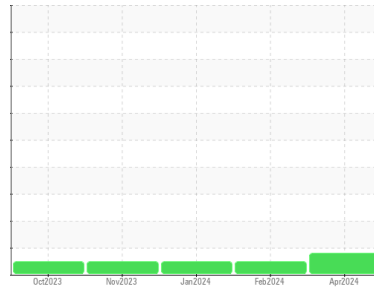

WEAR



Machine Id
834051
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0114194	GFL0108068	GFL0108128
Sample Date	Client Info	03 Apr 2024	20 Feb 2024	25 Jan 2024
Machine Age	hrs	1170	926	761
Oil Age	hrs	1170	926	0
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	▲ 73	54	58
Chromium	ppm ASTM D5185m >5	2	1	2
Nickel	ppm ASTM D5185m >4	1	2	2
Titanium	ppm ASTM D5185m >5	0	0	<1
Silver	ppm ASTM D5185m >3	<1	0	0
Aluminum	ppm ASTM D5185m >25	5	4	3
Lead	ppm ASTM D5185m >40	5	4	3
Copper	ppm ASTM D5185m >150	17	16	19
Tin	ppm ASTM D5185m >4	4	2	3
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	6	8	5
Barium	ppm ASTM D5185m 5	3	3	0
Molybdenum	ppm ASTM D5185m 50	64	60	60
Manganese	ppm ASTM D5185m 0	15	13	15
Magnesium	ppm ASTM D5185m 560	905	879	856
Calcium	ppm ASTM D5185m 1510	1385	1386	1124
Phosphorus	ppm ASTM D5185m 780	867	828	676
Zinc	ppm ASTM D5185m 870	1111	1080	1037
Sulfur	ppm ASTM D5185m 2040	2310	2382	2181

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	25	26	32
Sodium	ppm ASTM D5185m	6	6	<1
Potassium	ppm ASTM D5185m >20	3	4	5

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0.1	0	0
Nitration	Abs/cm *ASTM D7624 >20	13.8	12.0	12.3
Sulfation	Abs/.1mm *ASTM D7415 >30	27.6	24.5	24.0

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	25.1	21.3	21.0
Base Number (BN)	mg KOH/g ASTM D2896 10.2	3.1	3.8	3.4







OIL ANALYSIS REPORT

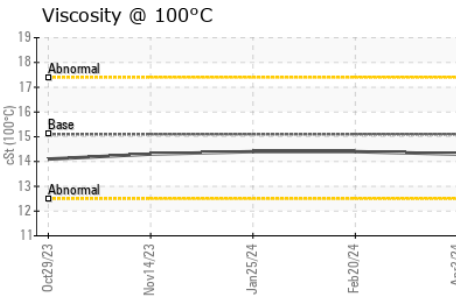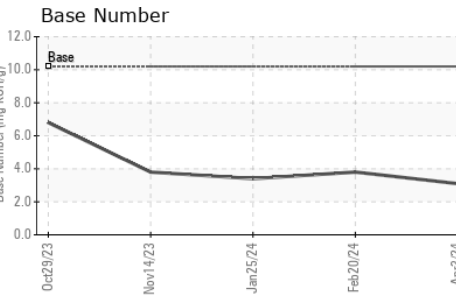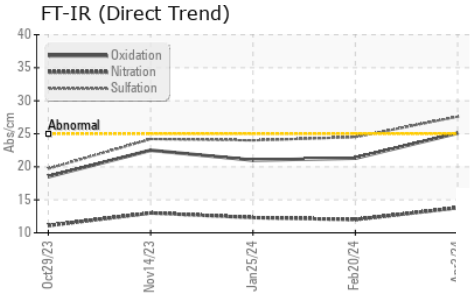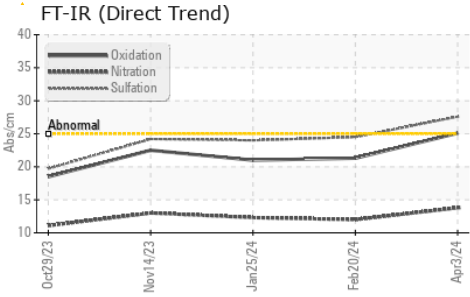

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.3	14.4

GRAPHS

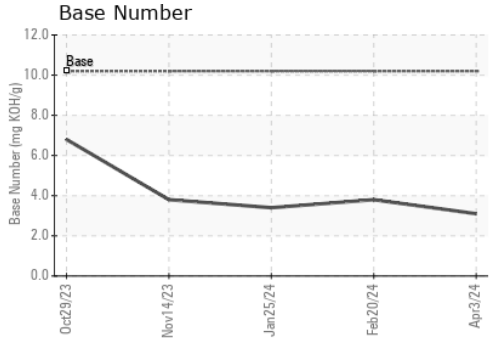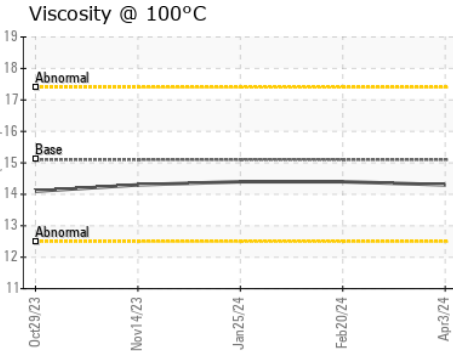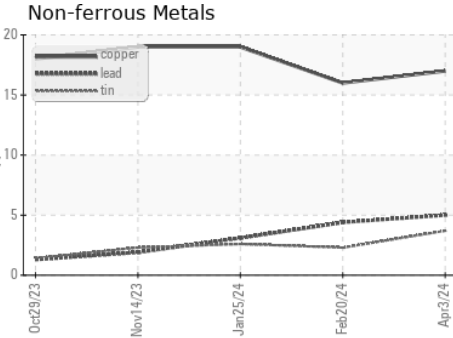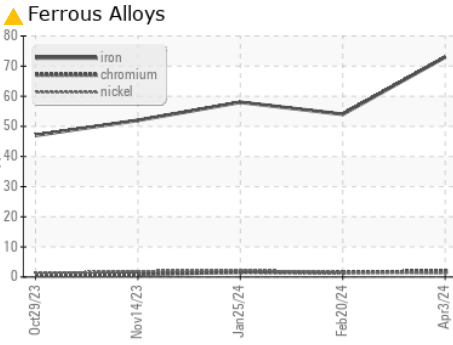

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0114194 **Received** : 08 Apr 2024
Lab Number : 06142138 **Tested** : 09 Apr 2024
Unique Number : 10966946 **Diagnosed** : 11 Apr 2024 - Don Baldrige
Test Package : FLEET

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: Robert Hart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (580)461-1509

F: