




# OIL ANALYSIS REPORT



Area  
**(48064UA)**  
Machine Id  
**813051**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

### Sample Rating Trend

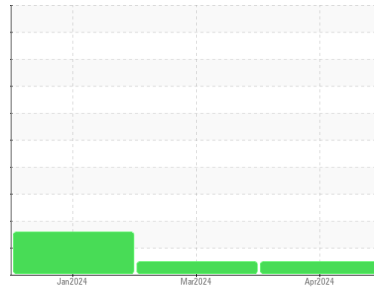

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0113629</b>	GFL0113633	GFL0103846
Sample Date	Client Info		<b>01 Apr 2024</b>	25 Mar 2024	25 Jan 2024
Machine Age	hrs	Client Info	<b>1120</b>	1074	599
Oil Age	hrs	Client Info	<b>521</b>	475	542
Oil Changed		Client Info	<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	0.2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>0</b>	16	45
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	1
Nickel	ppm	ASTM D5185m >5	<b>2</b>	8	16
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	4
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>3</b>	29	119
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	3
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>5</b>	15	222
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>50</b>	65	115
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	4
Magnesium	ppm	ASTM D5185m 450	<b>896</b>	921	690
Calcium	ppm	ASTM D5185m 3000	<b>1019</b>	1111	1429
Phosphorus	ppm	ASTM D5185m 1150	<b>980</b>	1027	689
Zinc	ppm	ASTM D5185m 1350	<b>1170</b>	1209	864
Sulfur	ppm	ASTM D5185m 4250	<b>2976</b>	3219	2321

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	11	▲ 77
Sodium	ppm	ASTM D5185m >216	<b>2</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	3

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.1</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.9</b>	8.2	10.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.7</b>	19.8	24.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	16.4	22.7
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.0</b>	7.3	7.4







# OIL ANALYSIS REPORT

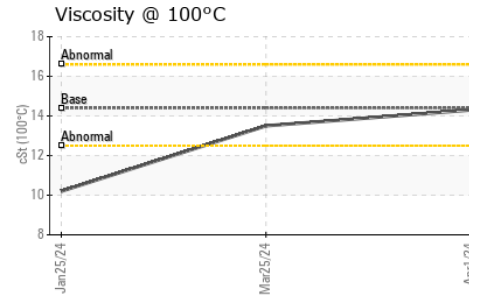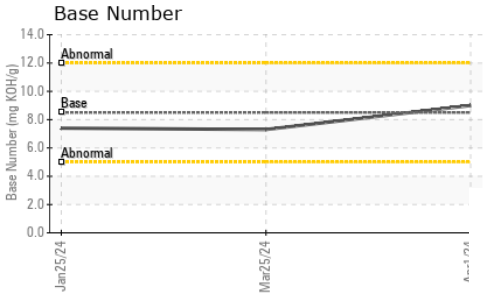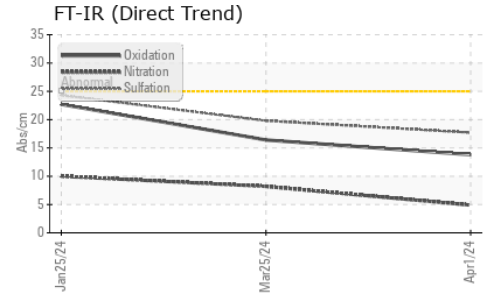

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.3</b>	13.5	10.2

## GRAPHS

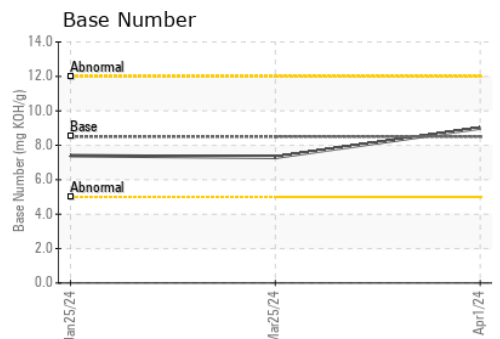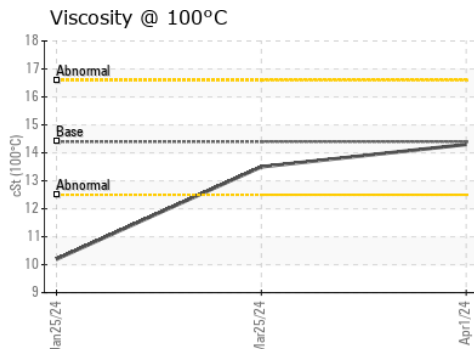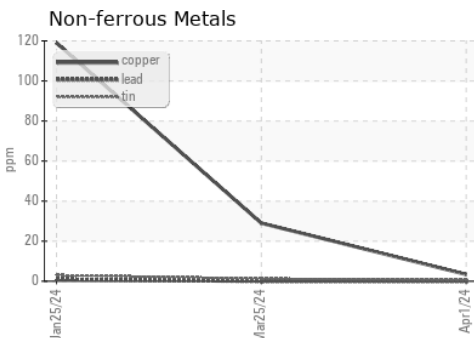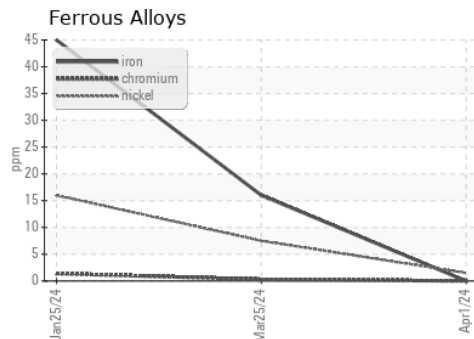

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0113629      **Received** : 08 Apr 2024  
**Lab Number** : **06142150**      **Tested** : 09 Apr 2024  
**Unique Number** : 10966958      **Diagnosed** : 09 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 654S - Midlothian**  
 12230 Deergrove Road  
 Midlothian, VA  
 US 23112  
 Contact: Corbin Umphlet  
 cumphlet@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)