


OIL ANALYSIS REPORT

ALBERT LEA Unit 04 DB010104E

Natural Gas Engine

PETRO CANADA DURON MONOGRADE HD 40W (350 GAL)



Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: 223 gallons of lube oil added this month.)

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method Imitibase current history1 history2	5 4011 (000 GAL	,					
Sample Date Client Info 29 Feb 2024 28 Feb 2024 25 Jan 2024 Machine Age hrs Client Info 15137 15137 14810 Oil Age hrs Client Info 42 15137 14810 Oil Changed Client Info Not Changd NoRMAL NORMAL	SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Machine Age hrs Client Info 15137 15137 14810 Oil Age hrs Client Info 42 15137 14810 Oil Age hrs Client Info 42 15137 14810 Oil Adage Client Info Not Changd NoRMAL OIL AGE NEG NE	Sample Number		Client Info		PCA0098890	PCA0106490	PCA0106489
Oil Age hrs Client Info 42 15137 14810 Oil Changed Sample Status Client Info Not Changd Not Changd Not Changd Oil Added NORMAL NoRMAL NORMAL NORMAL NORMAL CONTAMINATION method limit/base current history1 history2 WEAR METALS method limit/base current history1 history2 Iron ppm ASTM D5185m >50 <1 <1 3 Chromium ppm ASTM D5185m >50 <1 <1 3 Chromium ppm ASTM D5185m >2 0 0 0 Chromium ppm ASTM D5185m >2 0 0 0 Silver ppm ASTM D5185m >3 0 0 0 Aluminum ppm ASTM D5185m >9 <1 2 2 Lead ppm ASTM D5185m >9 <1 2 2 Lead ppm ASTM D5185m	Sample Date		Client Info		29 Feb 2024	28 Feb 2024	25 Jan 2024
Oil Changed Client Info Not Changd NORMAL NORMAL NORMAL	Machine Age	hrs	Client Info		15137	15137	14810
NORMAL NORMAL NORMAL	Oil Age	hrs	Client Info		42	15137	14810
Water WC Method So.1 NEG NEG NEG NEG	Oil Changed		Client Info		Not Changd	Not Changd	Oil Added
Water WC Method >0.1 NEG NEG NEG WEAR METALS method limit/base current history1 history2 Iron ppm ASTM D5185m >50 <1	Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS method limit/base current history1 history2 Iron ppm ASTM D5185m >50 <1 <1 3 Chromium ppm ASTM D5185m >4 0 <1 <1 Nickel ppm ASTM D5185m >2 0 0 0 Silver ppm ASTM D5185m >3 0 0 0 Aluminum ppm ASTM D5185m >3 0 0 0 Aluminum ppm ASTM D5185m >9 <1 2 2 Lead ppm ASTM D5185m >35 0 1 <1 0 Copper ppm ASTM D5185m >4 <1 <1 0 0 Cadadium ppm ASTM D5185m 0 0 0 <1 <1 1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1<	CONTAMINAT	ION	method	limit/base	current	history1	history2
Iron	Water		WC Method	>0.1	NEG	NEG	NEG
Chromium ppm ASTM D5185m >4 0 <1	WEAR METAL	S	method	limit/base	current	history1	history2
Nickel	Iron	ppm	ASTM D5185m	>50	<1	<1	3
Titanium	Chromium	ppm	ASTM D5185m	>4	0	<1	<1
Silver	Nickel	ppm	ASTM D5185m	>2	0	0	0
Aluminum ppm ASTM D5185m >9 <1	Titanium	ppm	ASTM D5185m		0	0	0
Lead ppm ASTM D5185m >30 <1	Silver	ppm	ASTM D5185m	>3	0	0	0
Copper ppm ASTM D5185m >35 0 1 <1	Aluminum	ppm	ASTM D5185m	>9	<1	2	2
Tin ppm ASTM D5185m >4 <1	Lead	ppm	ASTM D5185m	>30	<1	0	0
Vanadium ppm ASTM D5185m 0 0 0 Cadmium ppm ASTM D5185m 0 0 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185m 0 0 <1	Copper	ppm	ASTM D5185m	>35	-	1	<1
Cadmium ppm ASTM D5185m 0 0 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185m 0 0 <1	Tin	ppm	ASTM D5185m	>4	<1	<1	0
ADDITIVES	Vanadium	ppm	ASTM D5185m		0	0	0
Boron	Cadmium	ppm	ASTM D5185m		0	0	0
Barium ppm ASTM D5185m 0 0 5 Molybdenum ppm ASTM D5185m <1 2 <1 Manganese ppm ASTM D5185m <1 0 0 Magnesium ppm ASTM D5185m 904 955 986 Calcium ppm ASTM D5185m 990 1034 1076 Phosphorus ppm ASTM D5185m 1125 1077 1186 Zinc ppm ASTM D5185m 1297 1385 1369 Sulfur ppm ASTM D5185m 3162 3190 3528 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >+100 26 3 2 Sodium ppm ASTM D5185m >20 0 1 1 Fuel % ASTM D5185m >20 0 1 1 Fuel % ASTM D5185m	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum ppm ASTM D5185m <1	Boron	ppm	ASTM D5185m		0	0	<1
Manganese ppm ASTM D5185m <1	Barium	ppm	ASTM D5185m		0	0	
Magnesium ppm ASTM D5185m 904 955 986 Calcium ppm ASTM D5185m 990 1034 1076 Phosphorus ppm ASTM D5185m 1125 1077 1186 Zinc ppm ASTM D5185m 1297 1385 1369 Sulfur ppm ASTM D5185m 3162 3190 3528 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >+100 26 3 2 Sodium ppm ASTM D5185m 1 0 0 0 Potassium ppm ASTM D5185m >20 0 1 1 Fuel % ASTM D5185m >20 0 1 1 Fuel % ASTM D3185m 0 0.7 1.1 1.0 INFRA-RED method limit/base current history1 history2 Soot	Molybdenum	ppm	ASTM D5185m		<1	2	<1
Calcium ppm ASTM D5185m 990 1034 1076 Phosphorus ppm ASTM D5185m 1125 1077 1186 Zinc ppm ASTM D5185m 1297 1385 1369 Sulfur ppm ASTM D5185m 3162 3190 3528 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >+100 26 3 2 Sodium ppm ASTM D5185m >+100 0 0 Potassium ppm ASTM D5185m >20 0 1 1 Fuel % ASTM D3524 >4.0 0.7 1.1 1.0 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 0 0.1 0.1 Nitration Abs/:1mm *ASTM D7624 >20 2.9 3.7 3.7 Sulfati	Manganese	ppm	ASTM D5185m		<1	0	0
Phosphorus ppm ASTM D5185m 1125 1077 1186 Zinc ppm ASTM D5185m 1297 1385 1369 Sulfur ppm ASTM D5185m 3162 3190 3528 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >+100 26 3 2 Sodium ppm ASTM D5185m >+100 0 0 0 Potassium ppm ASTM D5185m >20 0 1 1 Fuel % ASTM D5185m >20 0 1 1 Fuel % ASTM D3524 >4.0 0.7 1.1 1.0 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7624 >20 2.9 3.7 3.7 Sulfation Abs/.1mm *ASTM D7415 >30 12.0 13.1	•	ppm	ASTM D5185m			955	986
Zinc ppm ASTM D5185m 1297 1385 1369 Sulfur ppm ASTM D5185m 3162 3190 3528 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >+100 26 3 2 Sodium ppm ASTM D5185m 1 0 0 0 Potassium ppm ASTM D5185m >20 0 1 1 Fuel % ASTM D5185m >20 0 1 1 Fuel % ASTM D5185m >20 0 1 1 Fuel % ASTM D5185m >20 0.7 1.1 1.0 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 0 0.1 0.1 Nitration Abs/.mm *ASTM D7415 >30 12.0 13.1 13.0	Calcium	ppm	ASTM D5185m		990	1034	1076
Sulfur ppm ASTM D5185m 3162 3190 3528 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >+100 26 3 2 Sodium ppm ASTM D5185m 1 0 0 Potassium ppm ASTM D5185m >20 0 1 1 Fuel % ASTM D5185m >20 0 1 1 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 0 0.1 0.1 Nitration Abs/cm *ASTM D7624 >20 2.9 3.7 3.7 Sulfation Abs/.1mm *ASTM D7415 >30 12.0 13.1 13.0 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 <td< th=""><th></th><th>ppm</th><th>ASTM D5185m</th><th></th><th>-</th><th></th><th></th></td<>		ppm	ASTM D5185m		-		
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >+100 26 3 2 Sodium ppm ASTM D5185m 1 0 0 Potassium ppm ASTM D5185m >20 0 1 1 Fuel % ASTM D3524 >4.0 0.7 1.1 1.0 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 0 0.1 0.1 Nitration Abs/cm *ASTM D7624 >20 2.9 3.7 3.7 Sulfation Abs/.1mm *ASTM D7415 >30 12.0 13.1 13.0 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.	Zinc	ppm	ASTM D5185m		1297	1385	1369
Silicon ppm ASTM D5185m >+100 26 3 2 Sodium ppm ASTM D5185m 1 0 0 Potassium ppm ASTM D5185m >20 0 1 1 Fuel % ASTM D3524 >4.0 0.7 1.1 1.0 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 0 0.1 0.1 Nitration Abs/cm *ASTM D7624 >20 2.9 3.7 3.7 Sulfation Abs/.1mm *ASTM D7415 >30 12.0 13.1 13.0 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	Sulfur	ppm	ASTM D5185m		3162	3190	3528
Sodium ppm ASTM D5185m 1 0 0 Potassium ppm ASTM D5185m >20 0 1 1 Fuel % ASTM D3524 >4.0 0.7 1.1 1.0 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 0 0.1 0.1 Nitration Abs/cm *ASTM D7624 >20 2.9 3.7 3.7 Sulfation Abs/.1mm *ASTM D7415 >30 12.0 13.1 13.0 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	CONTAMINAN	TS	method	limit/base	current	history1	history2
Potassium ppm ASTM D5185m >20 0 1 1 Fuel % ASTM D3524 >4.0 0.7 1.1 1.0 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 0 0.1 0.1 Nitration Abs/cm *ASTM D7624 >20 2.9 3.7 3.7 Sulfation Abs/.1mm *ASTM D7415 >30 12.0 13.1 13.0 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	Silicon	ppm	ASTM D5185m	>+100	26	3	2
Fuel % ASTM D3524 >4.0 0.7 1.1 1.0 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 0 0.1 0.1 Nitration Abs/cm *ASTM D7624 >20 2.9 3.7 3.7 Sulfation Abs/.1mm *ASTM D7415 >30 12.0 13.1 13.0 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	Sodium	ppm	ASTM D5185m		1	0	0
INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 0 0.1 0.1 Nitration Abs/cm *ASTM D7624 >20 2.9 3.7 3.7 Sulfation Abs/.1mm *ASTM D7415 >30 12.0 13.1 13.0 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	Potassium	ppm	ASTM D5185m	>20	0		
Soot % % *ASTM D7844 0 0.1 0.1 Nitration Abs/cm *ASTM D7624 >20 2.9 3.7 3.7 Sulfation Abs/.1mm *ASTM D7415 >30 12.0 13.1 13.0 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	Fuel	%	ASTM D3524	>4.0	0.7	1.1	1.0
Nitration Abs/cm *ASTM D7624 > 20 2.9 3.7 3.7 Sulfation Abs/.1mm *ASTM D7415 > 30 12.0 13.1 13.0 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 > 25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	INFRA-RED		method	limit/base	current	history1	history2
Sulfation Abs/.1mm *ASTM D7415 >30 12.0 13.1 13.0 FLUID DEGRADATION method limit/base current Limit/base current Limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	Soot %	%	*ASTM D7844		0	0.1	0.1
FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	Nitration	Abs/cm	*ASTM D7624	>20	2.9	3.7	3.7
Oxidation Abs/.1mm *ASTM D7414 >25 5.6 6.7 6.7 Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	Sulfation	Abs/.1mm	*ASTM D7415	>30	12.0	13.1	13.0
Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	FLUID DEGRA	NOITAC	method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045 1.76 1.79 1.55	Oxidation	Abs/.1mm	*ASTM D7414	>25	5.6	6.7	6.7
, , , ,							
	, ,	0 0		8.5			



OIL ANALYSIS REPORT

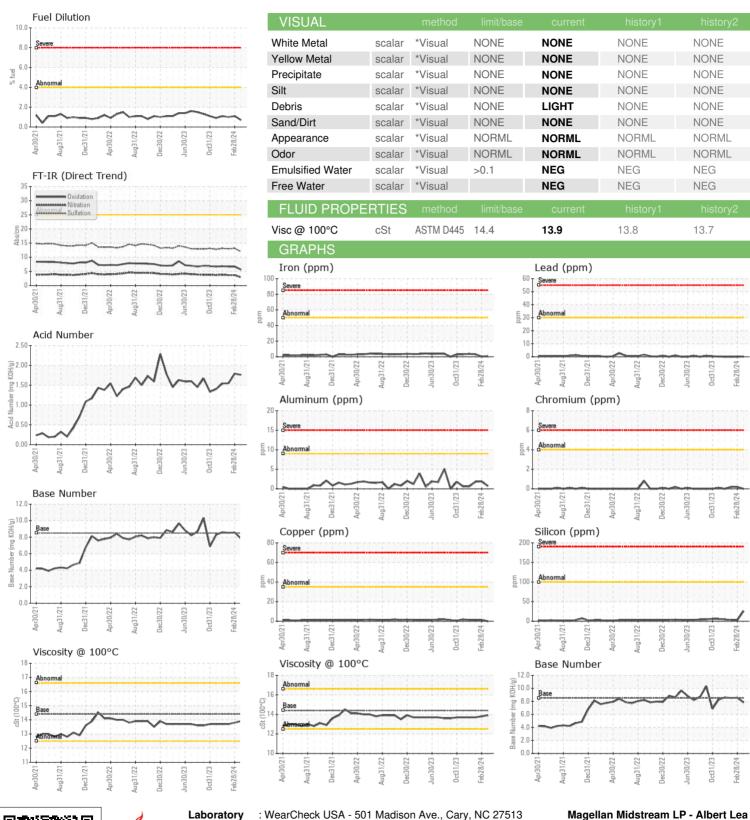





Certificate 12367

Report Id: MAGGLE [WUSCAR] 06142450 (Generated: 04/11/2024 14:24:36) Rev: 1

Laboratory Sample No. Lab Number

: PCA0098890 : 06142450 Unique Number: 10967258

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Received : 08 Apr 2024 **Tested** Diagnosed

: 11 Apr 2024 : 11 Apr 2024 - Jonathan Hester Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

Glenville, MN US 56036 Contact: Shawn Duren shawn.duren@magellanlp.com T: (641)231-6666

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: Jon Coulter

11406 755th Avenue