




# OIL ANALYSIS REPORT

Sample Rating Trend

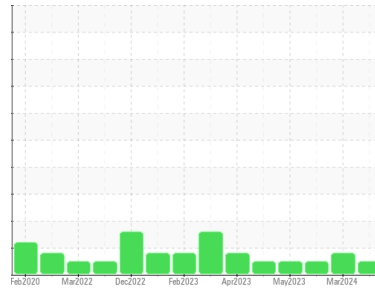

**NORMAL**



Area  
**(EDB493)**  
Machine Id  
**3709C**  
Component  
**Natural Gas Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0111514</b>	GFL0111542	GFL0083162
Sample Date	Client Info		<b>02 Apr 2024</b>	12 Mar 2024	15 Jun 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>42</b>	▲ 53	12
Chromium	ppm	ASTM D5185m >4	<b>5</b>	3	2
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >9	<b>6</b>	5	6
Lead	ppm	ASTM D5185m >30	<b>2</b>	<1	2
Copper	ppm	ASTM D5185m >35	<b>3</b>	3	13
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	3	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	65	60
Manganese	ppm	ASTM D5185m 0	<b>3</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>753</b>	968	598
Calcium	ppm	ASTM D5185m 1070	<b>1804</b>	1217	1701
Phosphorus	ppm	ASTM D5185m 1150	<b>946</b>	1080	689
Zinc	ppm	ASTM D5185m 1270	<b>1151</b>	1297	994
Sulfur	ppm	ASTM D5185m 2060	<b>3200</b>	3398	2824

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>11</b>	9	4
Sodium	ppm	ASTM D5185m	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	1

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	2.9	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.0</b>	9.9	11.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.7</b>	23.7	23.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.8</b>	15.7	20.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.5</b>	7.8	3.8







# OIL ANALYSIS REPORT

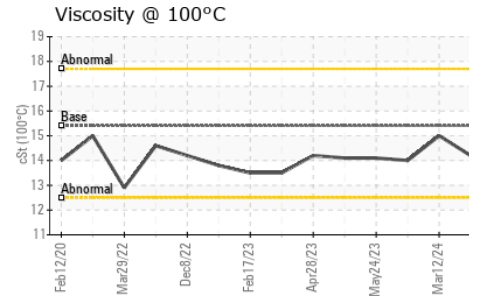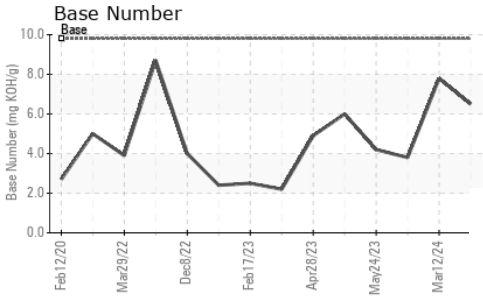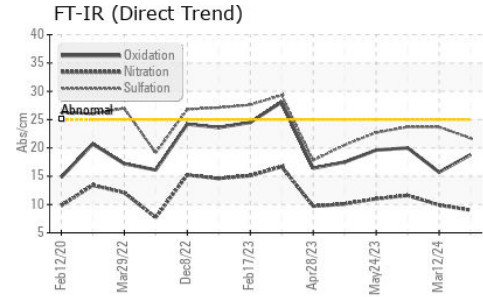

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	15.0

## GRAPHS

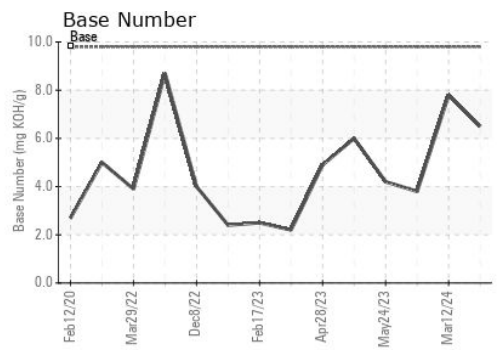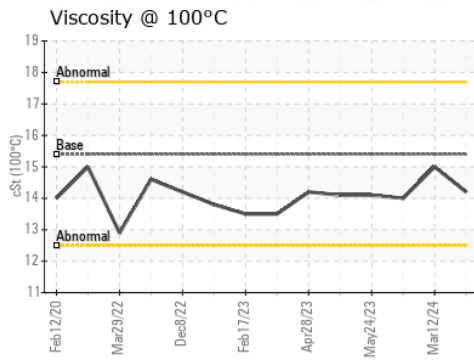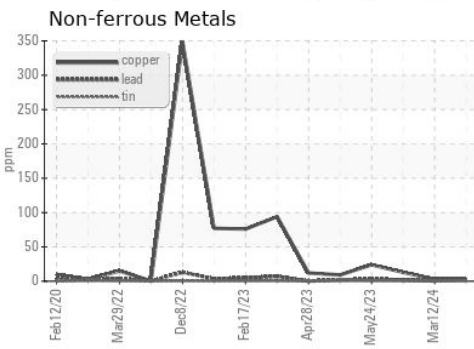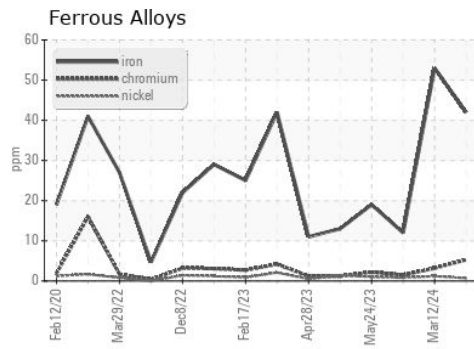

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0111514      **Received** : 09 Apr 2024  
**Lab Number** : 06142742      **Tested** : 09 Apr 2024  
**Unique Number** : 10967550      **Diagnosed** : 11 Apr 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 074 - Douglas - Transwaste**  
 1219 Landfill Road  
 Douglas, GA  
 US 31533

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: CURTIS JACOBS  
 CURTIS.JACOBS@GFLENV.COM  
 T: (912)384-6001  
 F: