




PROBLEM SUMMARY

Machine Id
729091
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

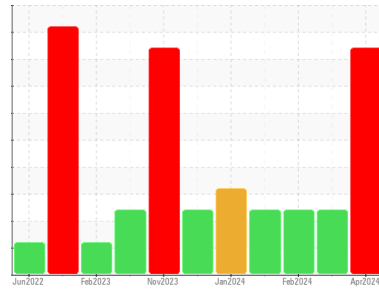


GLYCOL



COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

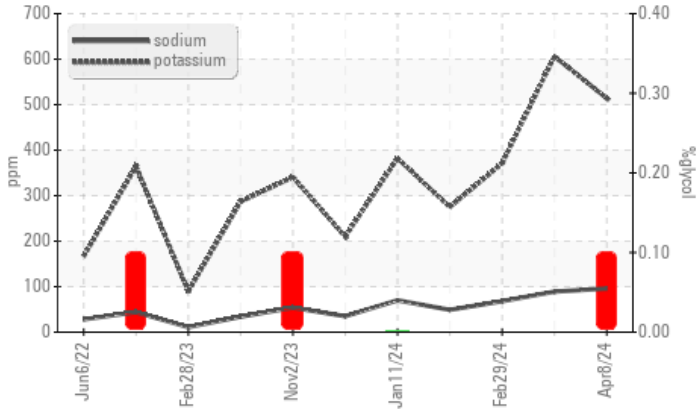

RECOMMENDATION

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status		SEVERE	ABNORMAL	ABNORMAL
Potassium	ppm ASTM D5185m >20	▲ 514	▲ 606	▲ 371
Glycol	% *ASTM D2982	▲ 0.10	NEG	NEG

Customer Id: GFL652
 Sample No.: GFL0111881
 Lab Number: 06143534
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Flush System	---	---	?	We advise that you flush the component thoroughly before re-filling with oil.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

GLYCOL



20 Mar 2024 Diag: Jonathan Hester

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels remain high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



GLYCOL



29 Feb 2024 Diag: Jonathan Hester

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels remain high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



GLYCOL



07 Feb 2024 Diag: Sean Felton

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

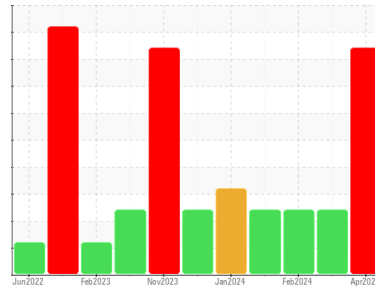

GLYCOL



Machine Id

729091

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Test for glycol is positive. There is a high concentration of glycol present in the oil.

● Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0111881	GFL0111891	GFL0111832
Sample Date	Client Info	08 Apr 2024	20 Mar 2024	29 Feb 2024
Machine Age	hrs	15476	15330	15189
Oil Age	hrs	15476	15330	15189
Oil Changed	Client Info	Not Changed	Not Changd	Not Changed
Sample Status		SEVERE	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	60	63	62
Chromium	ppm ASTM D5185m >20	2	2	1
Nickel	ppm ASTM D5185m >4	2	2	1
Titanium	ppm ASTM D5185m	<1	<1	0
Silver	ppm ASTM D5185m >3	0	<1	0
Aluminum	ppm ASTM D5185m >20	7	9	5
Lead	ppm ASTM D5185m >40	<1	3	3
Copper	ppm ASTM D5185m >330	10	11	8
Tin	ppm ASTM D5185m >15	1	2	0
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	<1	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	4	2
Barium	ppm ASTM D5185m 0	<1	2	0
Molybdenum	ppm ASTM D5185m 60	141	137	119
Manganese	ppm ASTM D5185m 0	1	1	<1
Magnesium	ppm ASTM D5185m 1010	936	932	1031
Calcium	ppm ASTM D5185m 1070	1126	1142	1158
Phosphorus	ppm ASTM D5185m 1150	1095	1289	1090
Zinc	ppm ASTM D5185m 1270	1273	1267	1313
Sulfur	ppm ASTM D5185m 2060	3378	3492	3406

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	9	13	6
Sodium	ppm ASTM D5185m	96	89	68
Potassium	ppm ASTM D5185m >20	514	606	371
Glycol	% *ASTM D2982	0.10	NEG	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	0.1	0.1
Nitration	Abs/cm *ASTM D7624 >20	8.1	7.8	7.5
Sulfation	Abs/.1mm *ASTM D7415 >30	18.8	18.3	18.0


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.4	14.7	14.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.9	8.9	9.0




OIL ANALYSIS REPORT

Glycol Contamination

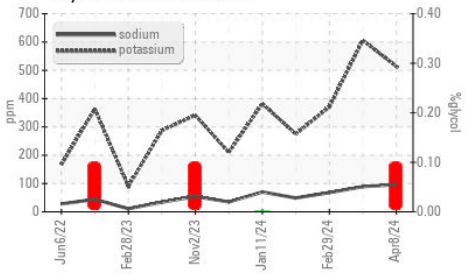

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FT-IR (Direct Trend)

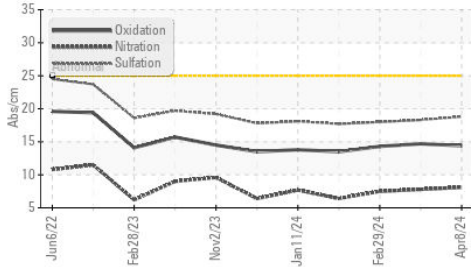


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.8

GRAPHS


Ferrous Alloys

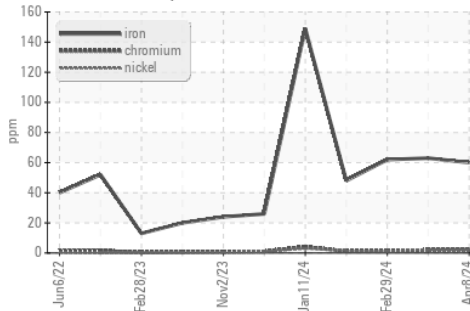


Non-ferrous Metals

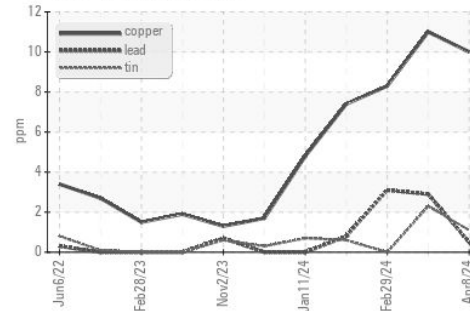


Base Number

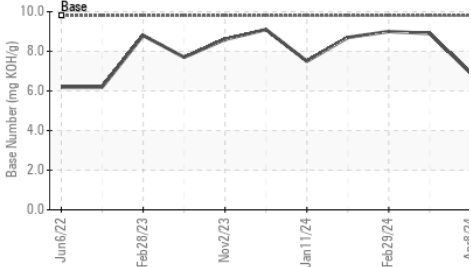

Viscosity @ 100°C

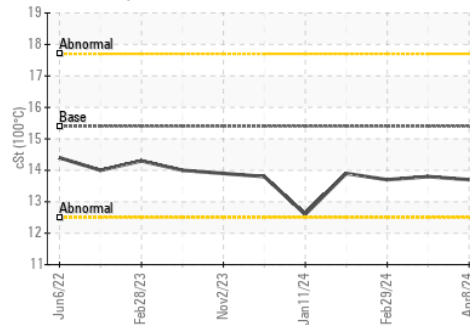

Base Number

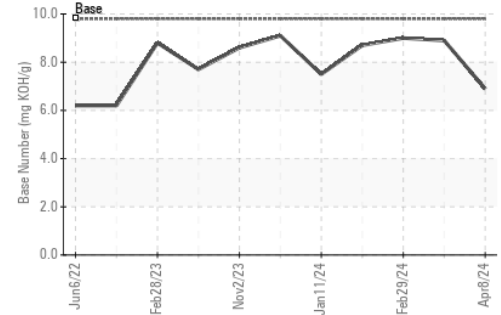

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0111881

Lab Number : 06143534

Unique Number : 10968342

Test Package : FLEET (Additional Tests: Glycol)

Received : 09 Apr 2024

Tested : 10 Apr 2024

Diagnosed : 10 Apr 2024 - Wes Davis

GFL Environmental - 652 - Fredericksburg Hauling

10954 Houser Drive

Fredericksburg, VA

US 22408

Contact: WILLIAM MILO

wmilo@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)