




OIL ANALYSIS REPORT

Sample Rating Trend

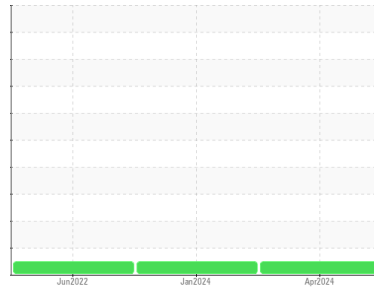

NORMAL



Machine Id

925029

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | GFL0107491 | GFL0107484 | GFL0050130 |
| Sample Date | Client Info | | | 02 Apr 2024 | 04 Jan 2024 | 22 Jun 2022 |
| Machine Age | hrs | Client Info | | 45009 | 44549 | 11546 |
| Oil Age | hrs | Client Info | | 604 | 604 | 600 |
| Oil Changed | Client Info | | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | | NEG | NEG | NEG |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >100 | 15 | 17 | 6 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | <1 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >20 | 3 | 3 | 2 |
| Lead | ppm | ASTM D5185m | >40 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >330 | 1 | 1 | 272 |
| Tin | ppm | ASTM D5185m | >15 | <1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | <1 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | 19 | 23 | 18 |
| Barium | ppm | ASTM D5185m | 0 | 2 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 62 | 64 | 51 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 1010 | 881 | 868 | 568 |
| Calcium | ppm | ASTM D5185m | 1070 | 1157 | 1115 | 1493 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 980 | 935 | 758 |
| Zinc | ppm | ASTM D5185m | 1270 | 1162 | 1201 | 976 |
| Sulfur | ppm | ASTM D5185m | 2060 | 3091 | 2847 | 2777 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >25 | 5 | 5 | 4 |
| Sodium | ppm | ASTM D5185m | | 3 | 4 | 7 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | <1 | 5 |


| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >3 | 0.5 | 0.7 | 0.1 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 8.7 | 9.6 | 8.9 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 20.3 | 21.8 | 18.7 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 16.1 | 17.8 | 15.8 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 8.4 | 7.8 | 6.6 |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

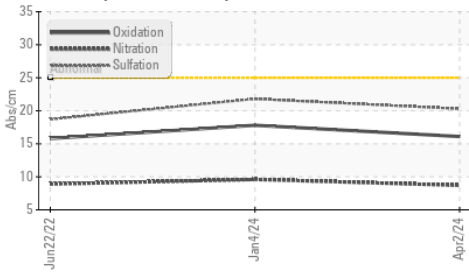

Base Number

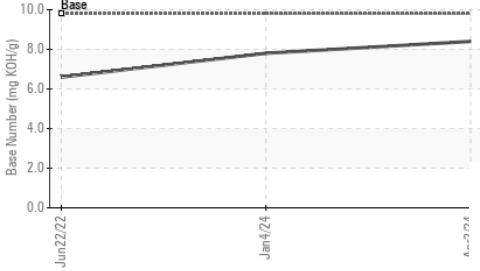

Viscosity @ 100°C

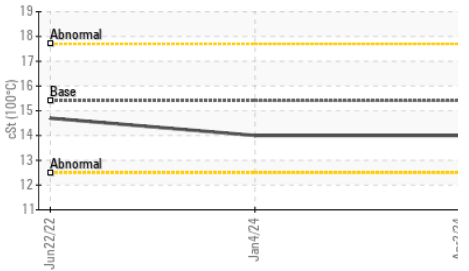


| PARAMETER | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| PARAMETER | method | limit/base | current | history1 | history2 |
|--------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 14.0 | 14.7 |

GRAPHS


Ferrous Alloys

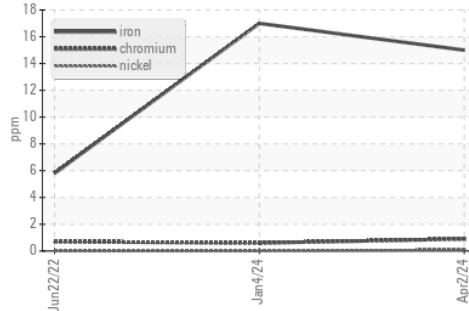


Non-ferrous Metals

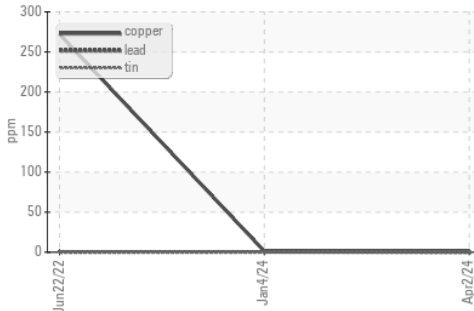

Viscosity @ 100°C

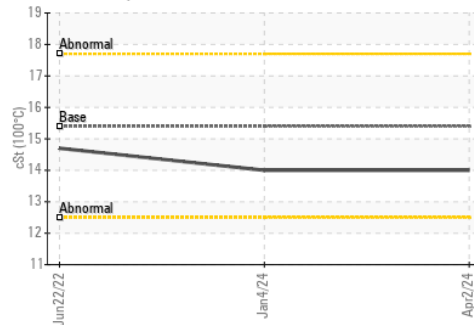

Base Number

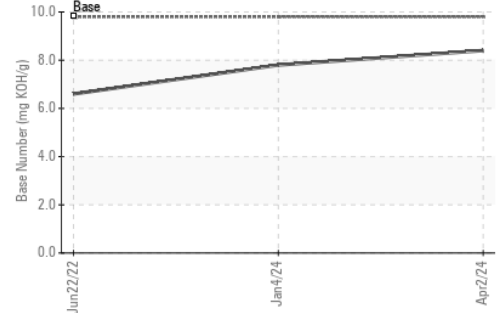

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0107491
 Lab Number : 06143542
 Unique Number : 10968350
 Test Package : FLEET

Received : 09 Apr 2024
 Tested : 10 Apr 2024
 Diagnosed : 10 Apr 2024 - Wes Davis

GFL Environmental - 912 - Fort Atkinson HC
 1215 Klement St.
 Fort Atkinson, WI
 US 53538

Contact: LEONARD KOZLEUCHAR
 leonard.kozleuchar@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (262)210-6528

F: