


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

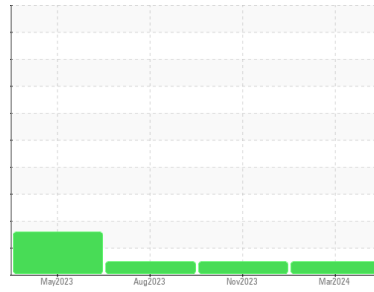

Machine Id  
**2126908**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0114774</b>	PCA0102453	PCA0088721
Sample Date	Client Info			<b>20 Mar 2024</b>	19 Nov 2023	04 Aug 2023
Machine Age	mls	Client Info		<b>91781</b>	66100	0
Oil Age	mls	Client Info		<b>40000</b>	15000	20000
Oil Changed	Client Info			<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>26</b>	25	18
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>6</b>	1	0
Titanium	ppm	ASTM D5185m		<b>20</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	2
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	9	8
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	2	1
Copper	ppm	ASTM D5185m	>330	<b>53</b>	111	137
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>8</b>	2	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>48</b>	61	66
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	950	<b>801</b>	830	851
Calcium	ppm	ASTM D5185m	1050	<b>1296</b>	1114	1159
Phosphorus	ppm	ASTM D5185m	995	<b>872</b>	833	947
Zinc	ppm	ASTM D5185m	1180	<b>1156</b>	1048	1128
Sulfur	ppm	ASTM D5185m	2600	<b>3156</b>	2308	2693

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	7	8
Sodium	ppm	ASTM D5185m		<b>2</b>	3	0
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	26	27

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.1</b>	9.1	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.5</b>	21.1	19.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.1</b>	16.6	14.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.4</b>	6.7	7.6





# OIL ANALYSIS REPORT

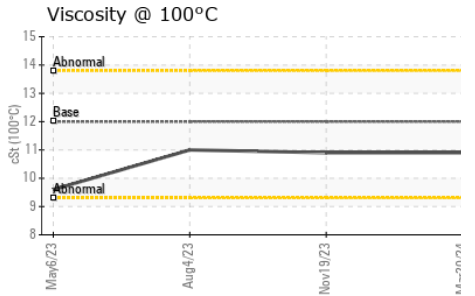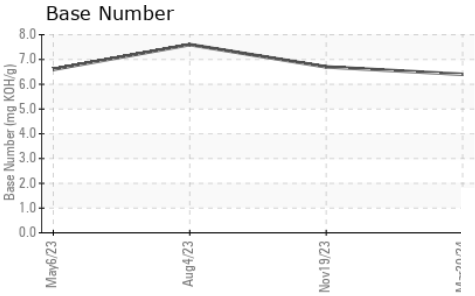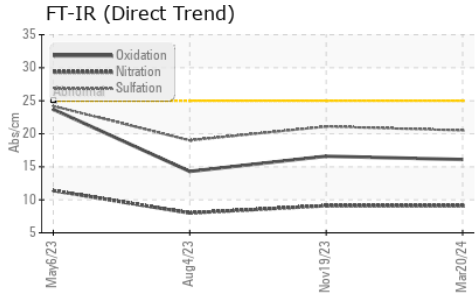

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.9	11.0

## GRAPHS

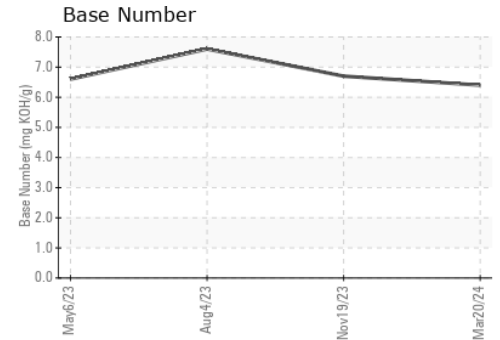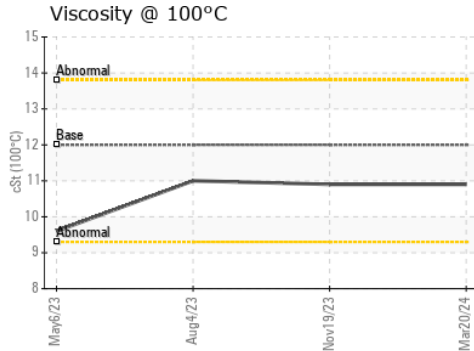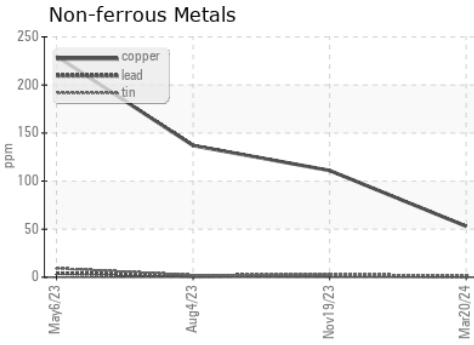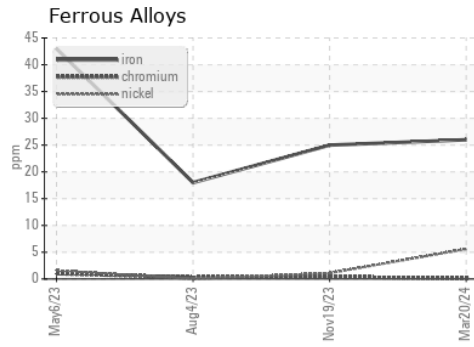

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0114774      **Received** : 10 Apr 2024  
**Lab Number** : **06143843**      **Tested** : 11 Apr 2024  
**Unique Number** : 10968651      **Diagnosed** : 12 Apr 2024 - Angela Borella  
**Test Package** : FLEET

**PERDUE FARMS - SALISBURY**  
 7036 ZION CHURCH ROAD  
 SALISBURY, MD  
 US 21802  
 Contact: RICHARD O'NEAL  
 richard.oneal@perdue.com  
 T: (410)543-3628  
 F: (410)341-2164

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)