




# OIL ANALYSIS REPORT

Sample Rating Trend

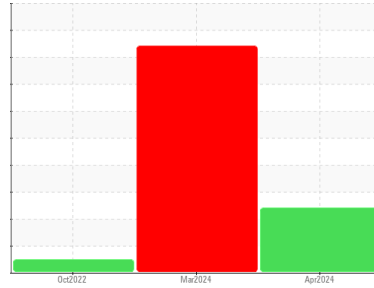

GLYCOL



Machine Id  
**844001**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. ( Customer Sample Comment: RE SAMPLE )

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels remain high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0108394</b>	GFL0108386	GFL0056055
Sample Date	Client Info	<b>04 Apr 2024</b>	20 Mar 2024	07 Oct 2022
Machine Age	hrs	<b>1169</b>	1100	20130
Oil Age	hrs	<b>69</b>	1100	20130
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>ABNORMAL</b>	SEVERE	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	<b>14</b>	42	17
Chromium	ppm ASTM D5185m >4	<b>2</b>	6	4
Nickel	ppm ASTM D5185m >2	<b>1</b>	3	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >9	<b>2</b>	3	2
Lead	ppm ASTM D5185m >30	<b>1</b>	<1	9
Copper	ppm ASTM D5185m >35	<b>1</b>	3	26
Tin	ppm ASTM D5185m >4	<b>1</b>	0	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	<b>39</b>	12	4
Barium	ppm ASTM D5185m 5	<b>0</b>	<1	0
Molybdenum	ppm ASTM D5185m 50	<b>58</b>	104	52
Manganese	ppm ASTM D5185m 0	<b>1</b>	1	<1
Magnesium	ppm ASTM D5185m 560	<b>579</b>	565	544
Calcium	ppm ASTM D5185m 1510	<b>1638</b>	1804	1546
Phosphorus	ppm ASTM D5185m 780	<b>753</b>	608	765
Zinc	ppm ASTM D5185m 870	<b>977</b>	1115	928
Sulfur	ppm ASTM D5185m 2040	<b>2666</b>	3354	2389

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	<b>15</b>	29	6
Sodium	ppm ASTM D5185m	<b>▲ 179</b>	▲ 1387	91
Potassium	ppm ASTM D5185m >20	<b>▲ 69</b>	▲ 578	7
Glycol	% *ASTM D2982	<b>---</b>	▲ 0.20	0.0

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0</b>	0	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>8.5</b>	15.6	11.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.9</b>	27.8	22.2


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.7</b>	19.8	18.7
Base Number (BN)	mg KOH/g ASTM D2896 10.2	<b>8.2</b>	7.2	7.3




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

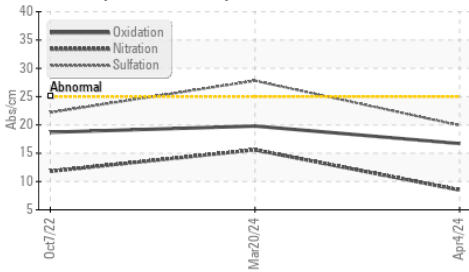


Glycol Contamination

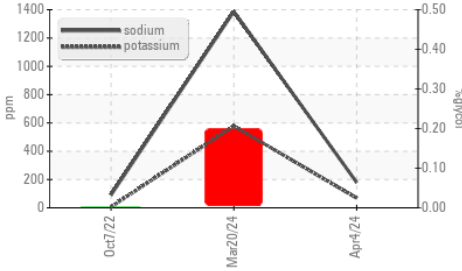

Viscosity @ 100°C

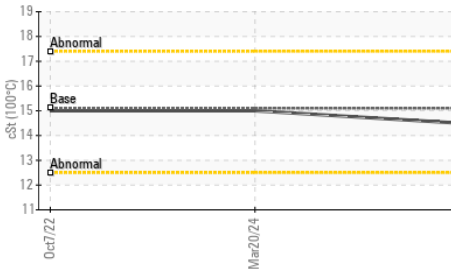

Glycol Contamination

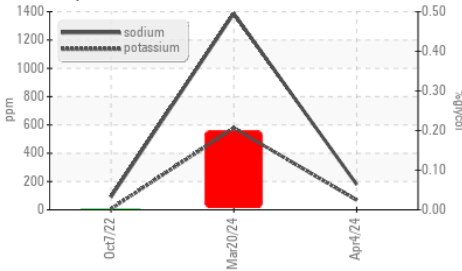


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.5	15.0

## GRAPHS


Ferrous Alloys

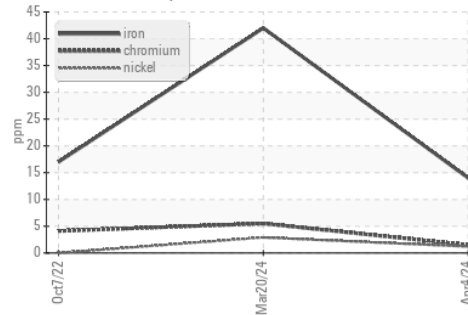


Non-ferrous Metals

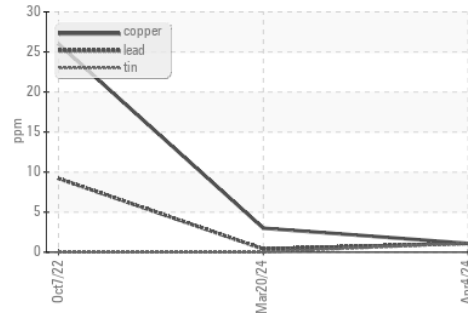

Viscosity @ 100°C

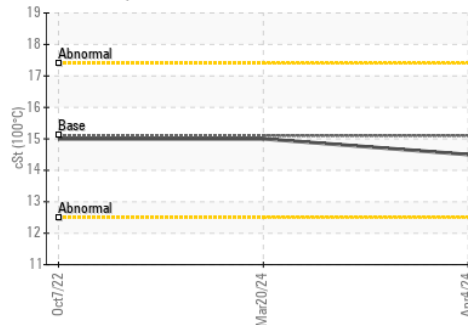

Base Number

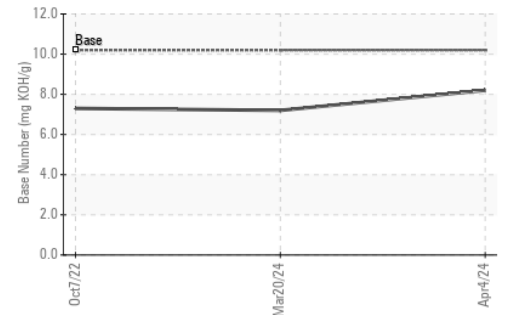

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0108394  
 Lab Number : 06144041  
 Unique Number : 10968849  
 Test Package : FLEET

Received : 10 Apr 2024  
 Tested : 12 Apr 2024  
 Diagnosed : 12 Apr 2024 - Jonathan Hester

GFL Environmental - 932 - Muskego HC  
 W144 S6400 College Ct.  
 Muskego, WI  
 US 53150

Contact: Brian Schlomann  
 brian.schlomann@gflenv.com  
 T: (262)510-4586

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)