


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

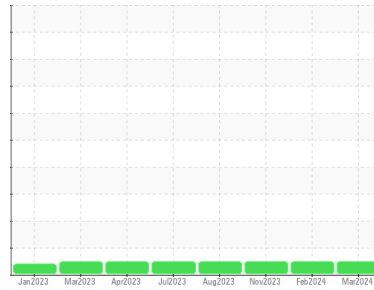

Machine Id  
**113 (S/N 3HSPAAPR8PN664805)**  
 Component  
**Diesel Engine**  
 Fluid  
**SHELL ROTELLA T4 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0105524</b>	PCA0105523	PCA0089629
Sample Date	Client Info			<b>22 Mar 2024</b>	01 Feb 2024	08 Nov 2023
Machine Age	mls Client Info			<b>157250</b>	139395	119117
Oil Age	mls Client Info			<b>17965</b>	20278	19677
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	<b>11</b>	10	10
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	1	1
Lead	ppm	ASTM D5185m	>40	<b>1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>132</b>	104	97
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>6</b>	6	13
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>30</b>	36	56
Calcium	ppm	ASTM D5185m		<b>2301</b>	1966	2031
Phosphorus	ppm	ASTM D5185m		<b>955</b>	883	933
Zinc	ppm	ASTM D5185m		<b>1197</b>	1052	1110
Sulfur	ppm	ASTM D5185m		<b>3573</b>	3208	2991

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	3	5
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	9	8

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	8.4	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.9</b>	21.4	21.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.6</b>	17.1	16.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>6.5</b>	6.2	6.2





# OIL ANALYSIS REPORT

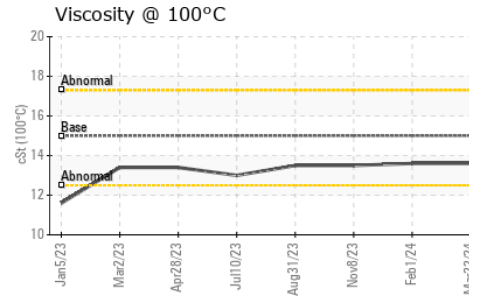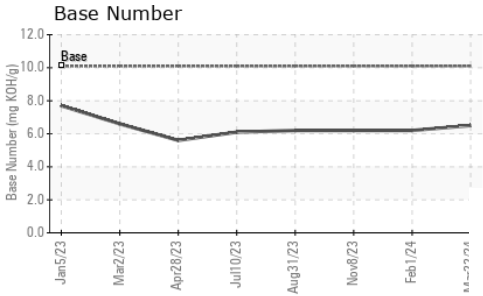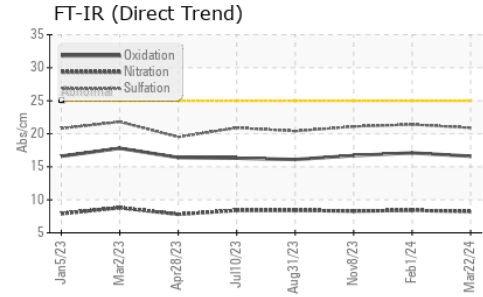

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15	13.6	13.6

## GRAPHS

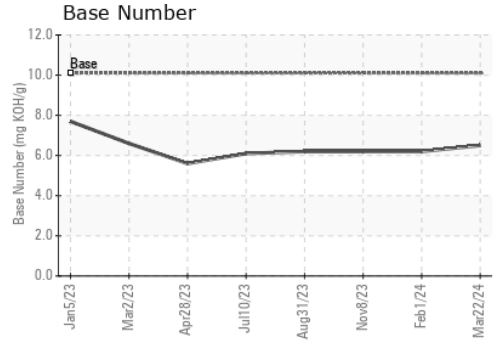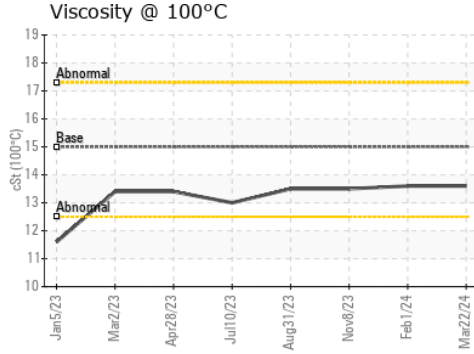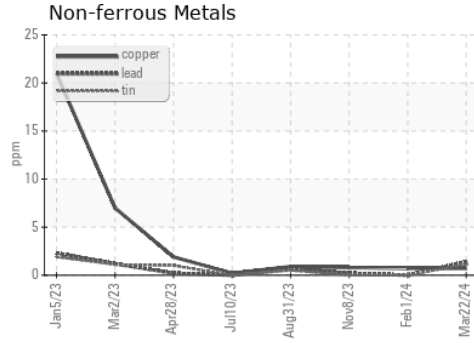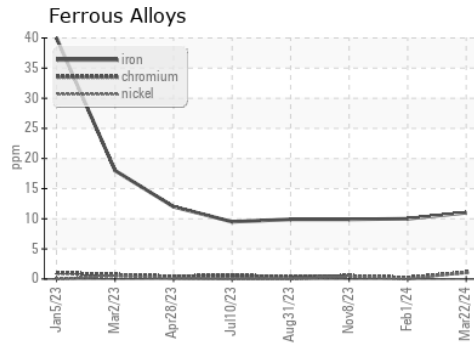

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105524 **Received** : 10 Apr 2024  
**Lab Number** : 06144045 **Tested** : 11 Apr 2024  
**Unique Number** : 10968853 **Diagnosed** : 12 Apr 2024 - Don Baldrige  
**Test Package** : FLEET

**VULCRAFT**  
 1501 W DARLINGTON ST  
 FLORENCE, SC  
 US 29501  
 Contact: DAVID VOUGHT  
 david.vought@vulcraft-sc.com  
 T: (843)409-3910  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)