




# OIL ANALYSIS REPORT

Sample Rating Trend

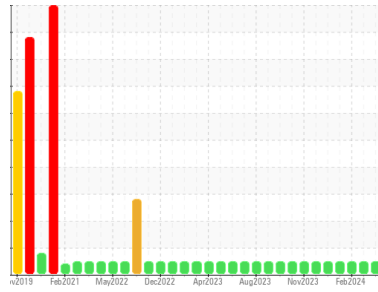

**NORMAL**



Machine Id  
**429060-402468**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0118607</b>	GFL0099292	GFL0105558
Sample Date	Client Info	<b>04 Apr 2024</b>	12 Mar 2024	01 Feb 2024
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	600	0
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>6</b>	9	8
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	0	0
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>2</b>	<1	2
Lead	ppm ASTM D5185m >45	<b>1</b>	0	<1
Copper	ppm ASTM D5185m >85	<b>&lt;1</b>	0	2
Tin	ppm ASTM D5185m >4	<b>1</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>2</b>	2	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	59	57
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m 1010	<b>950</b>	948	902
Calcium	ppm ASTM D5185m 1070	<b>1214</b>	1094	1114
Phosphorus	ppm ASTM D5185m 1150	<b>1031</b>	1015	998
Zinc	ppm ASTM D5185m 1270	<b>1241</b>	1180	1237
Sulfur	ppm ASTM D5185m 2060	<b>3273</b>	3360	3059

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>4</b>	2	4
Sodium	ppm ASTM D5185m	<b>1</b>	3	3
Potassium	ppm ASTM D5185m >20	<b>2</b>	0	3

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.1</b>	0.3	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>6.8</b>	9.1	7.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.9</b>	20.2	19.2


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.1</b>	17.2	15.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.2</b>	7.0	7.6




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

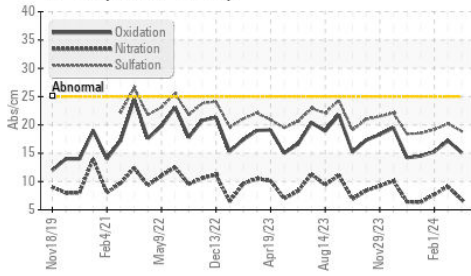

Base Number

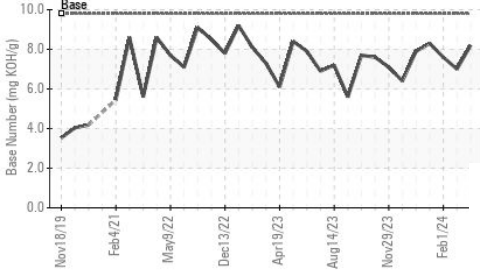

Viscosity @ 100°C

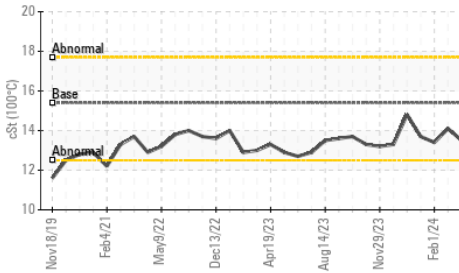


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	14.1

## GRAPHS


Ferrous Alloys

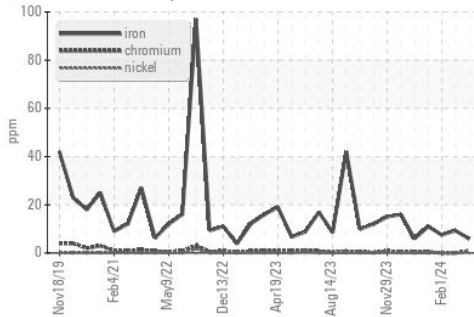


Non-ferrous Metals

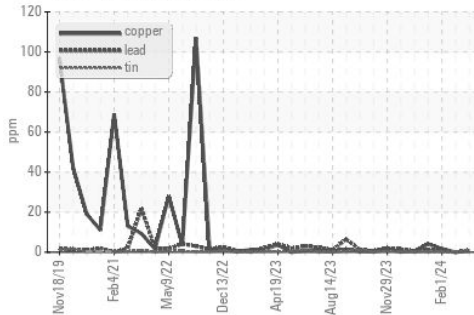

Viscosity @ 100°C

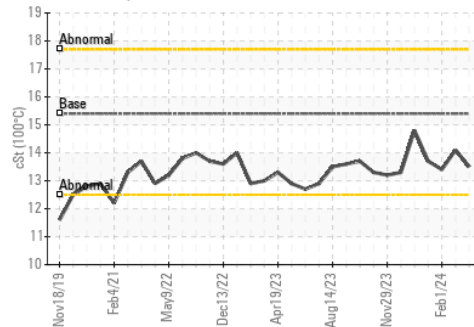

Base Number

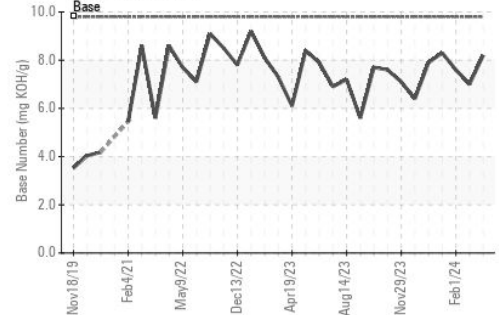

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0118607  
**Lab Number** : 06144052  
**Unique Number** : 10968860  
**Test Package** : FLEET

**Received** : 10 Apr 2024  
**Tested** : 11 Apr 2024  
**Diagnosed** : 11 Apr 2024 - Wes Davis

**GFL Environmental - 846 - Mayfield Hauling**  
 3426 State Route 45  
 Mayfield, KY  
 US 42066

Contact: Jack Lindsey  
 jack.lindsey@gflenv.com  
 T: (270)970-3690

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)