




# OIL ANALYSIS REPORT

Sample Rating Trend

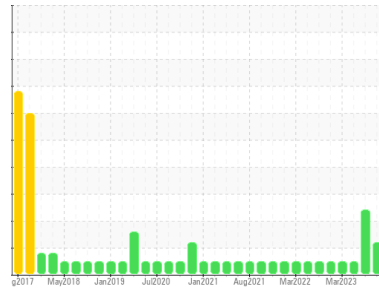

COOL CHEMICALS



Area  
**(P633834)**  
 Machine Id  
**3755C**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (30 QTS)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0101755</b>	GFL0090081	GFL0070767	
Sample Date	Client Info	<b>03 Apr 2024</b>	06 Dec 2023	18 May 2023	
Machine Age	hrs	Client Info	<b>152000</b>	150692	150092
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>ABNORMAL</b>	ABNORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	<b>31</b>	▲ 51	14
Chromium	ppm	ASTM D5185m	>4	<b>5</b>	▲ 8	2
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>9</b>	▲ 11	<1
Lead	ppm	ASTM D5185m	>30	<b>3</b>	0	<1
Copper	ppm	ASTM D5185m	>35	<b>1</b>	2	0
Tin	ppm	ASTM D5185m	>4	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	50	<b>5</b>	4	7
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>56</b>	52	51
Manganese	ppm	ASTM D5185m	0	<b>2</b>	2	<1
Magnesium	ppm	ASTM D5185m	560	<b>577</b>	624	525
Calcium	ppm	ASTM D5185m	1510	<b>1709</b>	1666	1626
Phosphorus	ppm	ASTM D5185m	780	<b>731</b>	892	677
Zinc	ppm	ASTM D5185m	870	<b>996</b>	1050	904
Sulfur	ppm	ASTM D5185m	2040	<b>2604</b>	2395	2229

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>+100	<b>9</b>	23	4
Sodium	ppm	ASTM D5185m		<b>16</b>	15	12
Potassium	ppm	ASTM D5185m	>20	▲ <b>56</b>	29	<1

## INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844		<b>0</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.2</b>	13.0	11.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.6</b>	22.5	23.5


## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.3</b>	19.4	20.0
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>3.0</b>	5.2	4.9




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

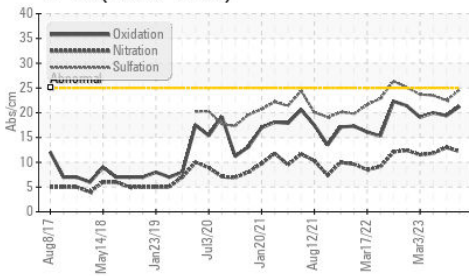


Glycol Contamination

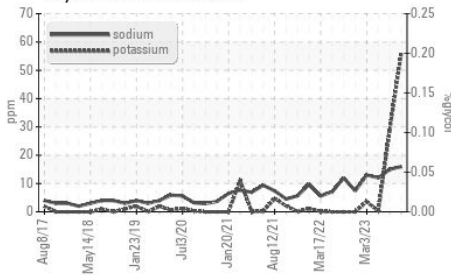

Viscosity @ 100°C

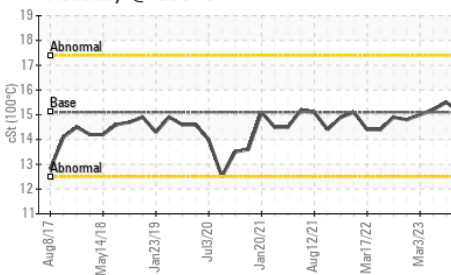

Glycol Contamination

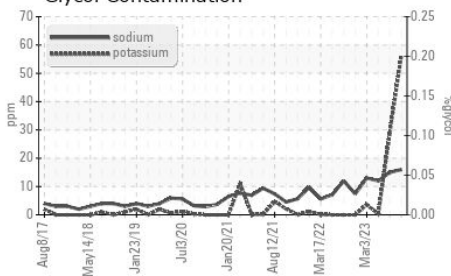


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	15.5	15.2

## GRAPHS


Ferrous Alloys

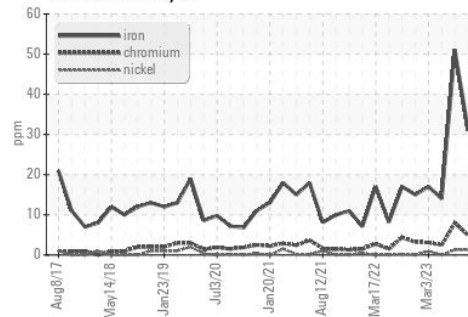


Non-ferrous Metals

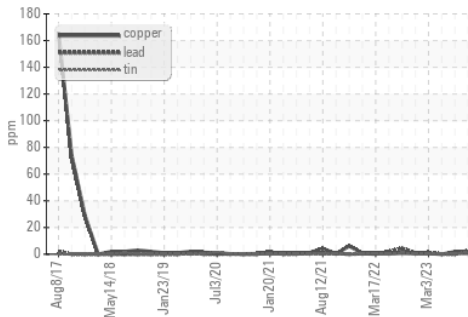

Viscosity @ 100°C

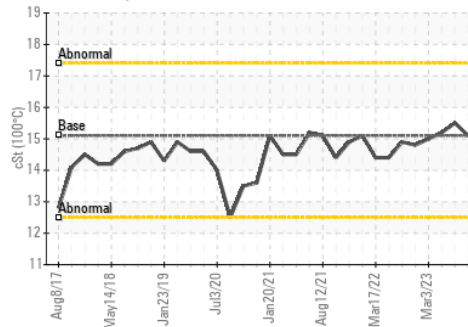

Base Number

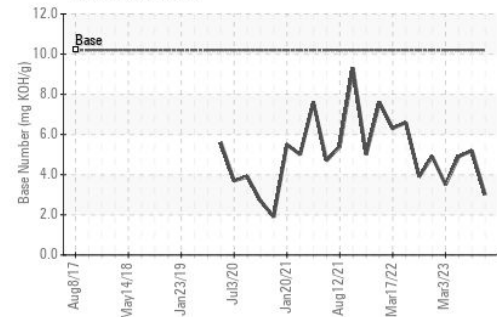

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0101755

Lab Number : 06144089

Unique Number : 10968897

Test Package : FLEET ( Additional Tests: Glycol )

Received : 10 Apr 2024

Tested : 15 Apr 2024

Diagnosed : 15 Apr 2024 - Jonathan Hester

GFL Environmental - 030 - Conway Myrtle Beach

3010 HWY 378

Conway, SC

US 29527

Contact: ARCILIO RUEZ

aruiz@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)