




# PROBLEM SUMMARY

Area  
**(P633830)**  
 Machine Id  
**3759C**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (40 QTS)**

Sample Rating Trend

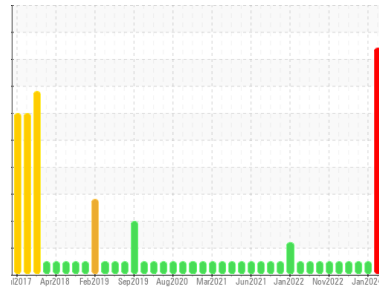


GLYCOL



## COMPONENT CONDITION SUMMARY

### ▲ Glycol Contamination

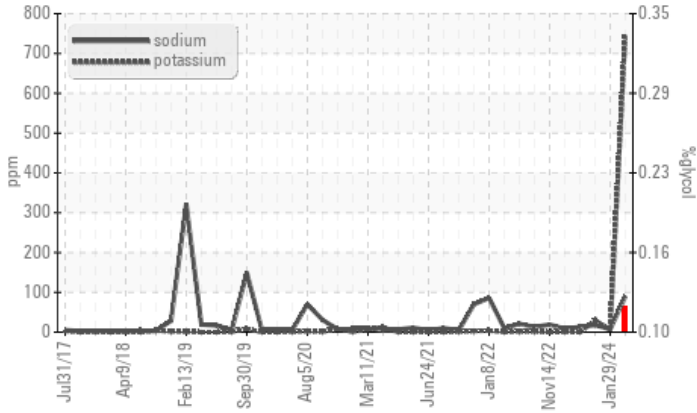

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	NORMAL
Sodium	ppm	ASTM D5185m		▲ 90	7	18
Potassium	ppm	ASTM D5185m	>20	▲ 751	6	29
Glycol	%	*ASTM D2982		▲ 0.12	---	---

Customer Id: GFL030  
 Sample No.: GFL0101764  
 Lab Number: 06144091  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

## HISTORICAL DIAGNOSIS

NORMAL



### 29 Jan 2024 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



NORMAL



### 22 Jun 2023 Diag: Angela Borella

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



NORMAL



### 07 Apr 2023 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

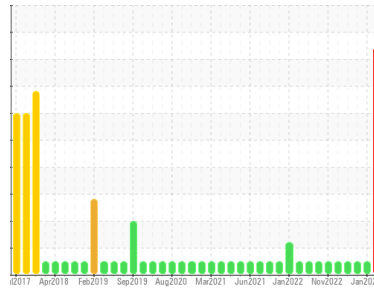

GLYCOL



Area  
**(P633830)**  
 Machine Id  
**3759C**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (40 QTS)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is positive.

### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0101764</b>	GFL0101780	GFL0070770
Sample Date	Client Info	<b>08 Apr 2024</b>	29 Jan 2024	22 Jun 2023
Machine Age	hrs	<b>17600</b>	17000	16191
Oil Age	hrs	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>SEVERE</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	<b>33</b>	10	29
Chromium	ppm ASTM D5185m >4	<b>4</b>	1	4
Nickel	ppm ASTM D5185m >2	<b>2</b>	<1	2
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >9	<b>8</b>	4	9
Lead	ppm ASTM D5185m >30	<b>5</b>	<1	4
Copper	ppm ASTM D5185m >35	<b>1</b>	<1	3
Tin	ppm ASTM D5185m >4	<b>1</b>	0	2
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	<b>9</b>	8	15
Barium	ppm ASTM D5185m 5	<b>0</b>	<1	0
Molybdenum	ppm ASTM D5185m 50	<b>63</b>	50	56
Manganese	ppm ASTM D5185m 0	<b>1</b>	<1	2
Magnesium	ppm ASTM D5185m 560	<b>564</b>	483	601
Calcium	ppm ASTM D5185m 1510	<b>1694</b>	1431	1709
Phosphorus	ppm ASTM D5185m 780	<b>712</b>	643	761
Zinc	ppm ASTM D5185m 870	<b>1017</b>	865	1000
Sulfur	ppm ASTM D5185m 2040	<b>2722</b>	2299	2967

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	<b>12</b>	4	7
Sodium	ppm ASTM D5185m	<b>▲ 90</b>	7	18
Potassium	ppm ASTM D5185m >20	<b>▲ 751</b>	6	29
Glycol	% *ASTM D2982	<b>▲ 0.12</b>	---	---

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0</b>	0	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>11.7</b>	10.9	10.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.3</b>	21.1	20.7


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.4</b>	17.9	18.4
Base Number (BN)	mg KOH/g ASTM D2896 10.2	<b>5.1</b>	4.5	5.9




# OIL ANALYSIS REPORT


## Glycol Contamination

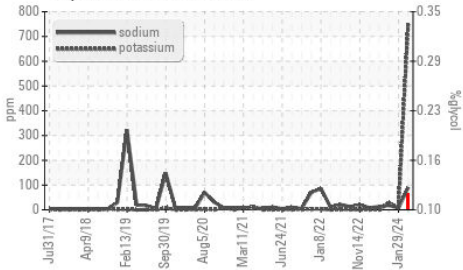


## FT-IR (Direct Trend)

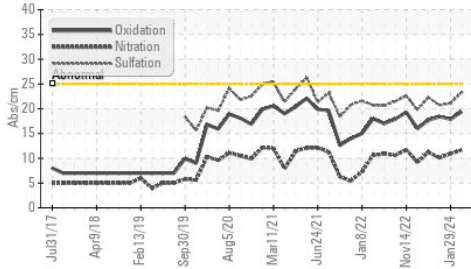

## Base Number

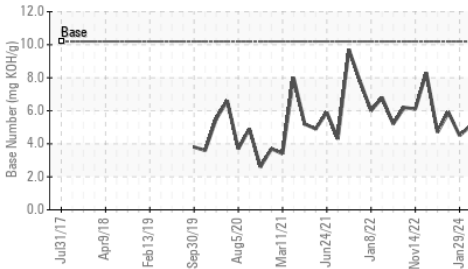

## Viscosity @ 100°C

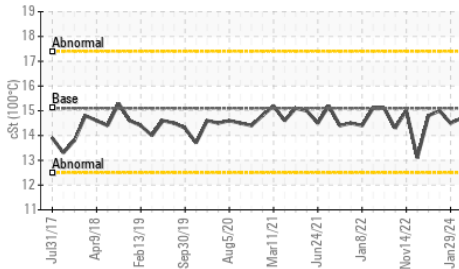

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.7	14.5

## GRAPHS


### Ferrous Alloys

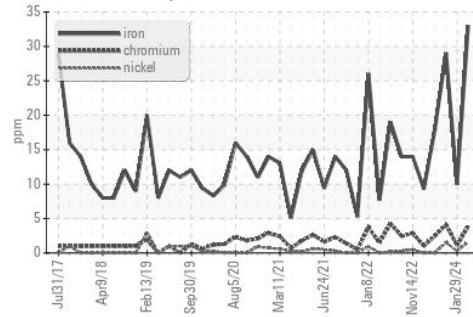


### Non-ferrous Metals

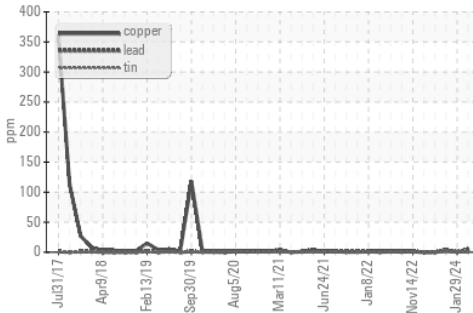

### Viscosity @ 100°C

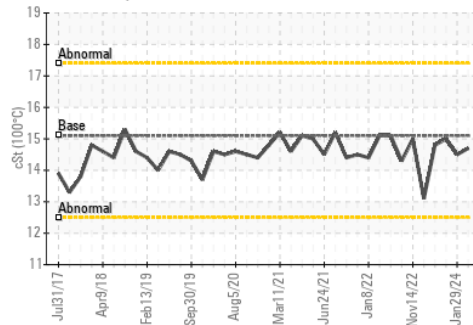

### Base Number

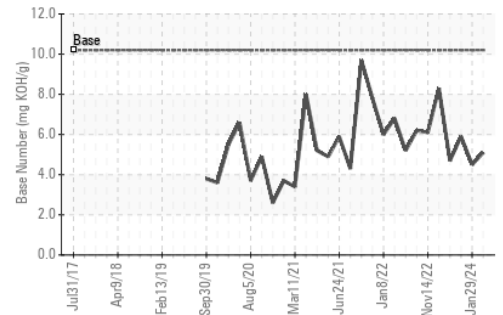

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0101764

Lab Number : 06144091

Unique Number : 10968899

Test Package : FLEET ( Additional Tests: Glycol )

Received : 10 Apr 2024

Tested : 12 Apr 2024

Diagnosed : 15 Apr 2024 - Jonathan Hester

GFL Environmental - 030 - Conway Myrtle Beach

3010 HWY 378

Conway, SC

US 29527

Contact: ARCILIO RUEZ

aruiz@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)