


OIL ANALYSIS REPORT

Sample Rating Trend

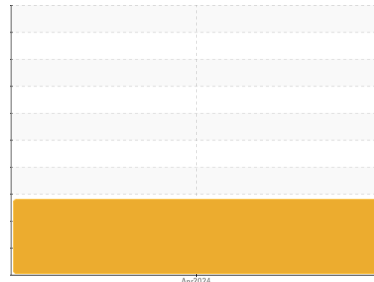

Machine Id
26591
 Component
Tandem
 Fluid
GEAR OIL SAE 75W140 (--- GAL)

DIAGNOSIS

- ▲ Recommendation**
 No corrective action is recommended at this time. Resample at the next service interval to monitor.
- ▲ Wear**
 The copper level is abnormal. All other metal levels are typical for a new component breaking in.
- ▲ Contamination**
 Elemental level of silicon (Si) above normal indicating ingress of seal material.
- Fluid Condition**
 The oil viscosity is lower than normal.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0123496	---	---
Sample Date	Client Info		03 Apr 2024	---	---
Machine Age	mls	Client Info	30000	---	---
Oil Age	mls	Client Info	30000	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >425	420	---	---
Chromium	ppm	ASTM D5185m >5	3	---	---
Nickel	ppm	ASTM D5185m >5	5	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >5	3	---	---
Lead	ppm	ASTM D5185m	11	---	---
Copper	ppm	ASTM D5185m >8	▲ 110	---	---
Tin	ppm	ASTM D5185m	9	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	182	---	---
Barium	ppm	ASTM D5185m 200	<1	---	---
Molybdenum	ppm	ASTM D5185m 12	<1	---	---
Manganese	ppm	ASTM D5185m	10	---	---
Magnesium	ppm	ASTM D5185m 12	2	---	---
Calcium	ppm	ASTM D5185m 150	23	---	---
Phosphorus	ppm	ASTM D5185m 1650	1568	---	---
Zinc	ppm	ASTM D5185m 125	45	---	---
Sulfur	ppm	ASTM D5185m 22500	26514	---	---




CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	▲ 96	---	---
Sodium	ppm	ASTM D5185m	10	---	---
Potassium	ppm	ASTM D5185m >20	6	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

OIL ANALYSIS REPORT

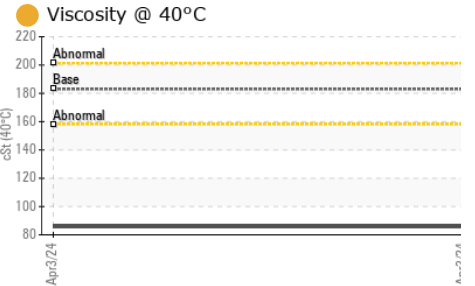
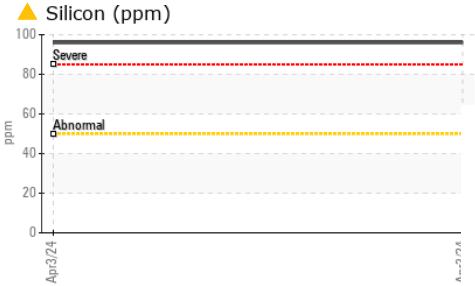
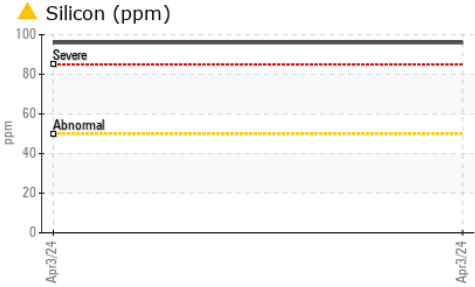


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	183	● 85.8	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

GRAPHS

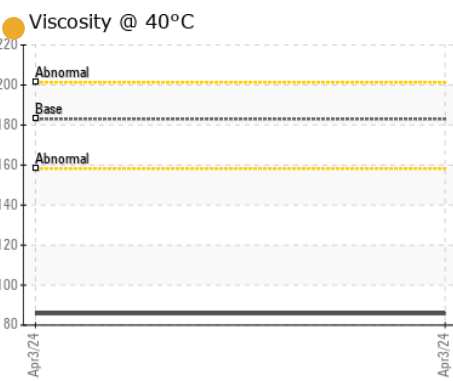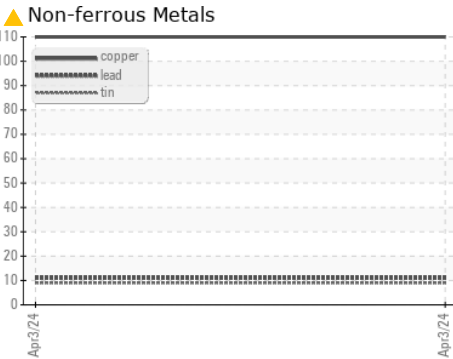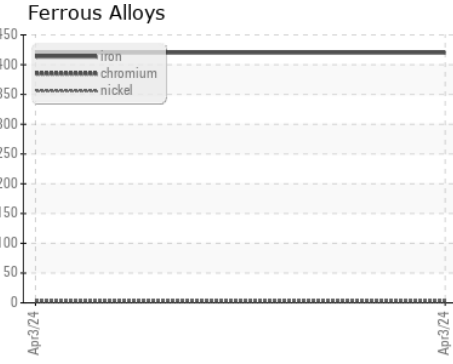

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123496
Lab Number : 06145473
Unique Number : 10970281
Test Package : FLEET

Received : 10 Apr 2024
Tested : 11 Apr 2024
Diagnosed : 14 Apr 2024 - Don Baldrige

PERDUE FARMS INC - GARAGE
 189 PERDUE WAY
 CANDOR, NC
 US 27229
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: