

OIL ANALYSIS REPORT

Sample Rating Trend



DIRT



Machine Id
7953
 Component
Tandem
 Fluid
GEAR OIL SAE 75W140 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

Elemental level of silicon (Si) above normal.

● Fluid Condition

The oil viscosity is lower than normal.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0118942	---	---
Sample Date	Client Info			04 Mar 2024	---	---
Machine Age	mls	Client Info		934600	---	---
Oil Age	mls	Client Info		0	---	---
Oil Changed	Client Info			Not Chngd	---	---
Sample Status				ABNORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	---	---



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>425	108	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>5	2	---	---
Lead	ppm	ASTM D5185m		1	---	---
Copper	ppm	ASTM D5185m	>8	10	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	340	---	---
Barium	ppm	ASTM D5185m	200	1	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		11	---	---
Magnesium	ppm	ASTM D5185m	12	<1	---	---
Calcium	ppm	ASTM D5185m	150	17	---	---
Phosphorus	ppm	ASTM D5185m	1650	1527	---	---
Zinc	ppm	ASTM D5185m	125	26	---	---
Sulfur	ppm	ASTM D5185m	22500	26116	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	▲ 59	---	---
Sodium	ppm	ASTM D5185m		28	---	---
Potassium	ppm	ASTM D5185m	>20	11	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

OIL ANALYSIS REPORT

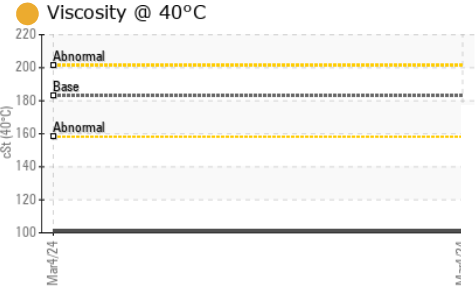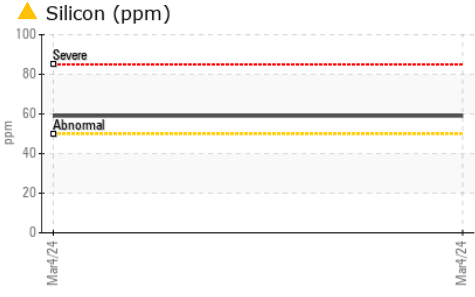




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	183 ● 101	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS

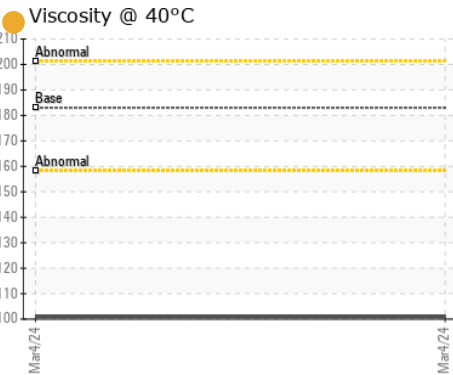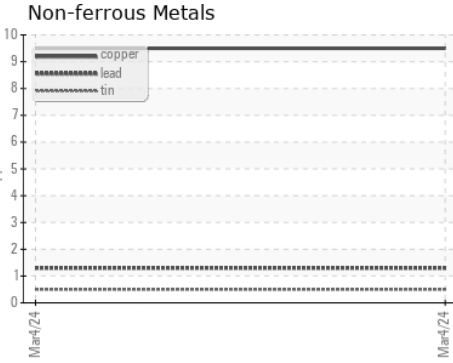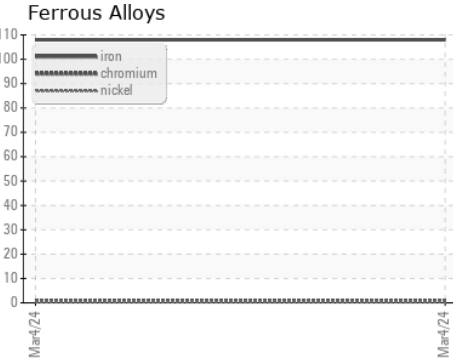

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0118942 **Received** : 10 Apr 2024
Lab Number : 06145474 **Tested** : 11 Apr 2024
Unique Number : 10970282 **Diagnosed** : 14 Apr 2024 - Don Baldrige
Test Package : FLEET

PERDUE FARMS INC - GARAGE
 189 PERDUE WAY
 CANDOR, NC
 US 27229
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: