




OIL ANALYSIS REPORT

Sample Rating Trend

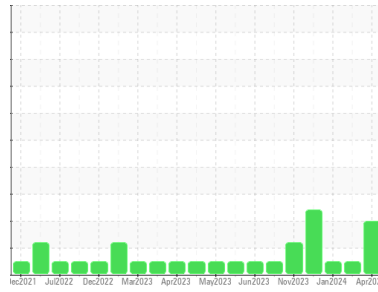

Machine Id
424057-19
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

- Recommendation**
We advise that you check the fuel injection system. Resample at the next service interval to monitor.
- Wear**
Valve wear is indicated.
- Contamination**
There is a moderate amount of fuel present in the oil.
- Fluid Condition**
Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0110619	GFL0100209	GFL0100196
Sample Date	Client Info	04 Apr 2024	09 Feb 2024	02 Jan 2024
Machine Age	hrs	21947	21607	20959
Oil Age	hrs	200	400	2982
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	14	5	2
Chromium	ppm ASTM D5185m >20	<1	<1	0
Nickel	ppm ASTM D5185m >5	▲ 8	2	0
Titanium	ppm ASTM D5185m >2	<1	0	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	4	1	<1
Lead	ppm ASTM D5185m >40	<1	0	0
Copper	ppm ASTM D5185m >330	2	<1	<1
Tin	ppm ASTM D5185m >15	<1	0	0
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	<1	<1
Barium	ppm ASTM D5185m 0	0	8	0
Molybdenum	ppm ASTM D5185m 60	61	55	58
Manganese	ppm ASTM D5185m 0	<1	0	0
Magnesium	ppm ASTM D5185m 1010	1090	836	1017
Calcium	ppm ASTM D5185m 1070	1193	969	1082
Phosphorus	ppm ASTM D5185m 1150	1103	867	1042
Zinc	ppm ASTM D5185m 1270	1420	1064	1287
Sulfur	ppm ASTM D5185m 2060	3560	2887	3271

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	7	4	3
Sodium	ppm ASTM D5185m	4	0	8
Potassium	ppm ASTM D5185m >20	2	1	<1
Fuel	% ASTM D3524 >3.0	▲ 4.5	<1.0	1.7

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.2	0.1	0
Nitration	Abs/cm *ASTM D7624 >20	8.4	6.5	4.8
Sulfation	Abs/.1mm *ASTM D7415 >30	20.1	17.5	17.6


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	17.3	14.2	13.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.1	7.0	9.1




OIL ANALYSIS REPORT


▲ Fuel Dilution

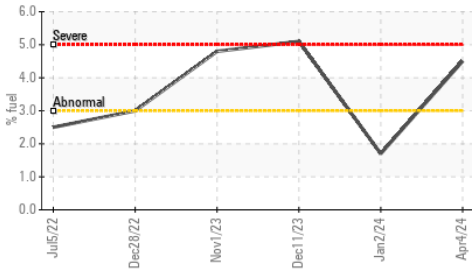


● FT-IR (Direct Trend)

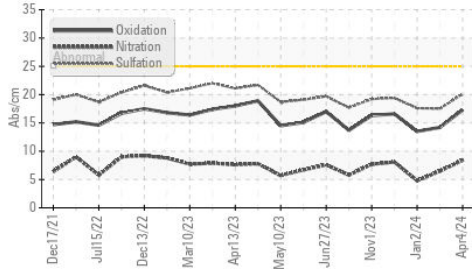


▲ Ferrous Alloys

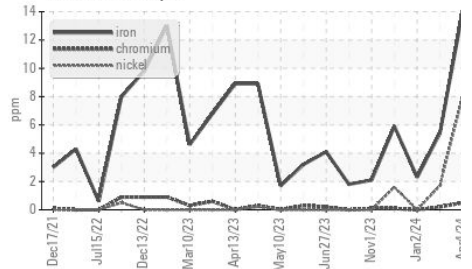

● FT-IR (Direct Trend)

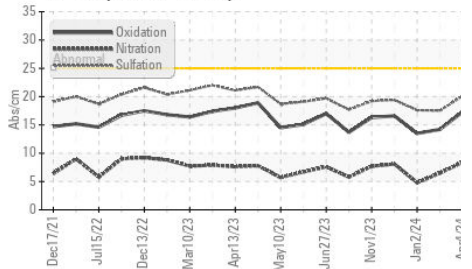

Base Number

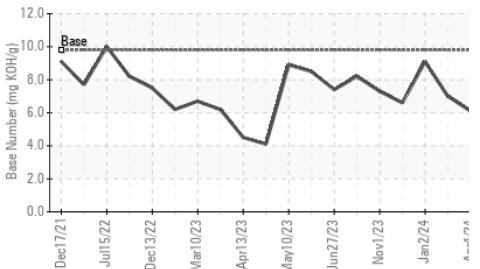


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 11.9	13.0	13.8

GRAPHS


▲ Ferrous Alloys

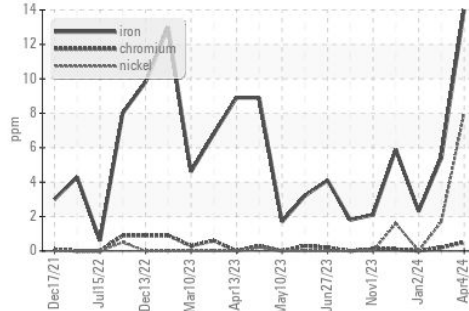


Non-ferrous Metals

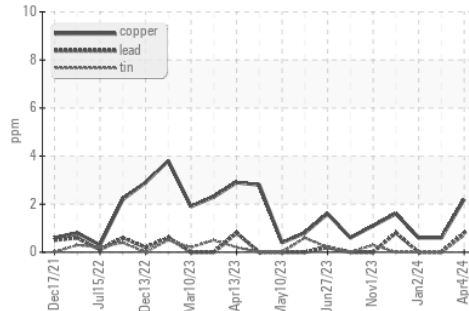

▲ Viscosity @ 100°C

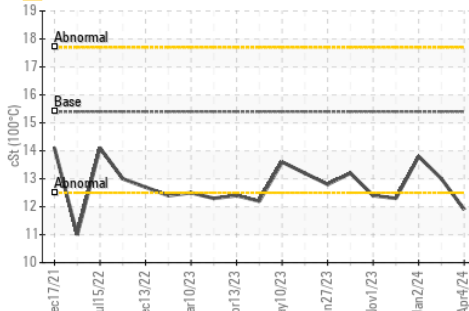

Base Number

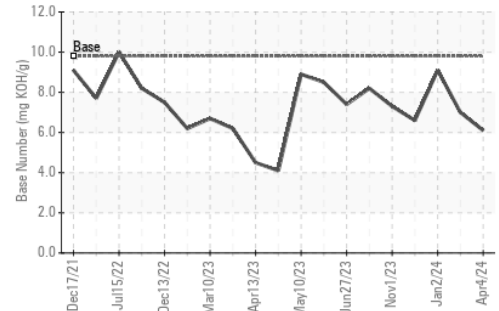

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0110619

Lab Number : 06145661

Unique Number : 10970469

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 11 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 16 Apr 2024 - Jonathan Hester

GFL Environmental - 166 - Phenix City

18 Old Brickyard Rd

Phenix City, AL

US 36869

Contact: DARRIN WRIGHT

darrin.wright@gflenv.com

T:

F: