




OIL ANALYSIS REPORT

Sample Rating Trend

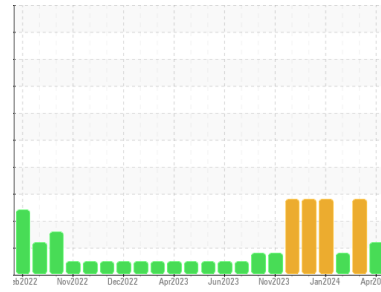

FUEL



Machine Id
227068-9

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0110627	GFL0110607	GFL0110595
Sample Date	Client Info	05 Apr 2024	08 Mar 2024	27 Feb 2024
Machine Age	mls	402845	19892	400
Oil Age	mls	0	600	400
Oil Changed	Client Info	Not Changed	Changed	Not Changed
Sample Status		ABNORMAL	ABNORMAL	MARGINAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	7	14	13
Chromium	ppm ASTM D5185m >5	<1	1	2
Nickel	ppm ASTM D5185m >2	<1	0	<1
Titanium	ppm ASTM D5185m	<1	0	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >30	1	2	3
Lead	ppm ASTM D5185m >30	<1	0	<1
Copper	ppm ASTM D5185m >150	1	5	6
Tin	ppm ASTM D5185m >5	<1	0	<1
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	<1	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	2	3
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	59	59	65
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1010	1042	922	941
Calcium	ppm ASTM D5185m 1070	1126	1013	981
Phosphorus	ppm ASTM D5185m 1150	1118	1016	1001
Zinc	ppm ASTM D5185m 1270	1362	1182	1211
Sulfur	ppm ASTM D5185m 2060	3882	3154	2967

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	12	▲ 48	46
Sodium	ppm ASTM D5185m	4	26	27
Potassium	ppm ASTM D5185m >20	1	4	5
Fuel	% ASTM D3524 >5	▲ 5.5	▲ 4.8	▲ 3.4

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	0.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	7.7	8.1	6.9
Sulfation	Abs/.1mm *ASTM D7415 >30	18.6	18.7	18.3

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.6	15.7	14.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.2	9.2	9.0







OIL ANALYSIS REPORT

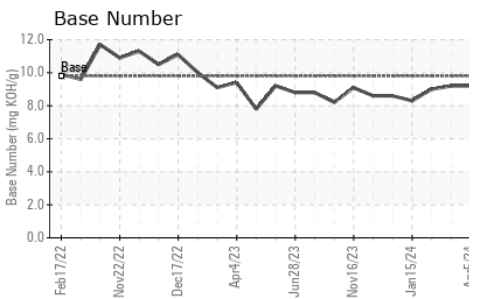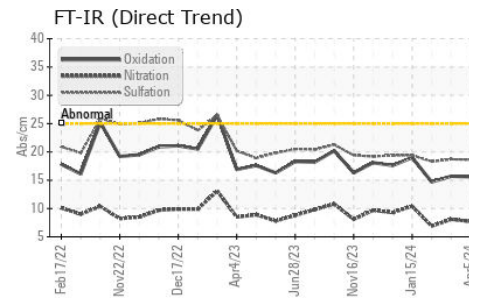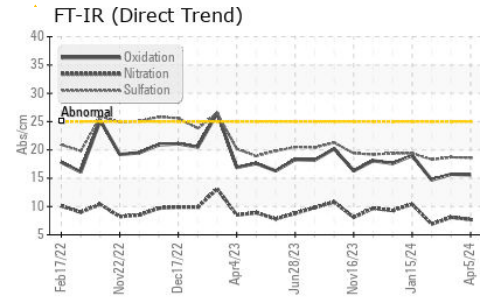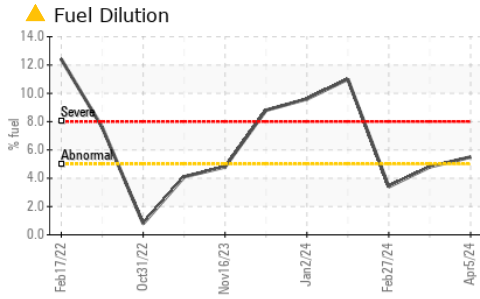

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.5	▲ 11.4

GRAPHS

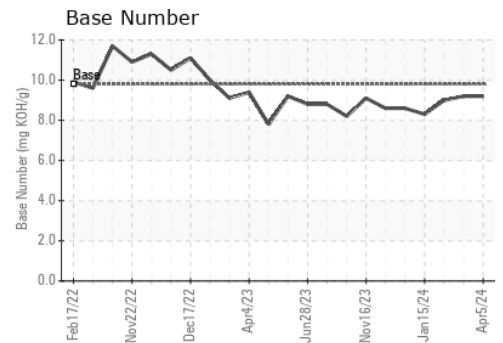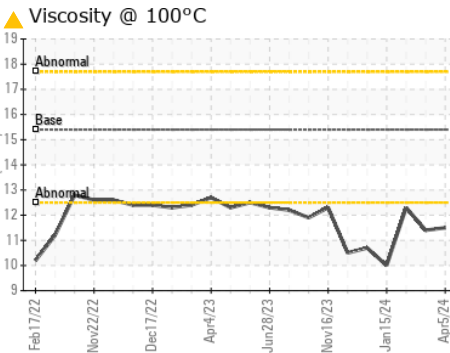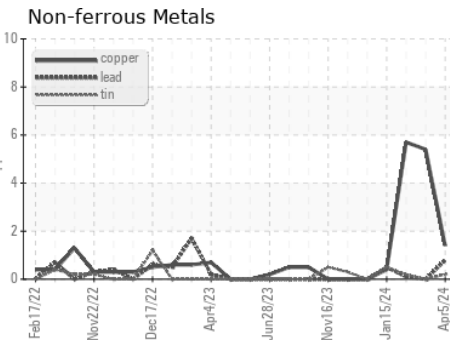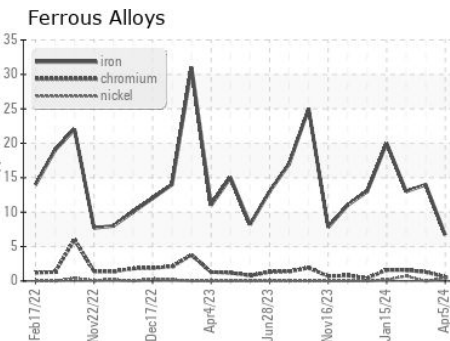

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110627 **Received** : 11 Apr 2024
Lab Number : 06145663 **Tested** : 17 Apr 2024
Unique Number : 10970471 **Diagnosed** : 17 Apr 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FUELDILUTION, PercentFuel)

GFL Environmental - 166 - Phenix City
 18 Old Brickyard Rd
 Phenix City, AL
 US 36869
 Contact: DEAN PEACE JR
 dean.peace@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: