

# **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

### 45 Component Compressor Fluid PETRO CANADA SENTRON LD 3000 (--- GAL)

# DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the component.


## Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0111988	PCA0103463	PCA0117177
Sample Date		Client Info		02 Apr 2024	05 Mar 2024	01 Feb 2024
Machine Age	hrs	Client Info		97165	96584	95823
Oil Age	hrs	Client Info		6356	5773	5012
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	4	<1	1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m		<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	1	1	1
Lead	ppm	ASTM D5185m	>25	4	3	3
Copper	ppm	ASTM D5185m	>50	6	4	3
Tin	ppm	ASTM D5185m	>15	2	2	1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	1	0	0	0
Molybdenum	ppm	ASTM D5185m	2	2	<1	0
Manganese	ppm	ASTM D5185m	1	<1	<1	<1
Magnesium	ppm	ASTM D5185m	5	9	10	11
Calcium	ppm	ASTM D5185m	1220	1248	1197	1218
Phosphorus	ppm	ASTM D5185m	298	285	273	288
Zinc	ppm	ASTM D5185m	350	329	337	337
Sulfur	ppm	ASTM D5185m	1995	2500	2263	2336
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	1	1
Sodium	ppm	ASTM D5185m		0	2	2
Potassium	ppm	ASTM D5185m	>20	2	<1	2
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.86	0.542	0.17	0.13




# **OIL ANALYSIS REPORT**

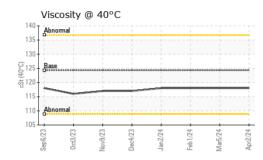


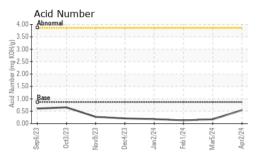





		and a first of	12		In the tax work	le la transition
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method			history1	history2
FLUID PROPE Visc @ 40°C	RTIES cSt	method ASTM D445	limit/base 124.3	current 118	history1 118	history2 118
	cSt					
Visc @ 40°C	cSt	ASTM D445	124.3	118	118	118

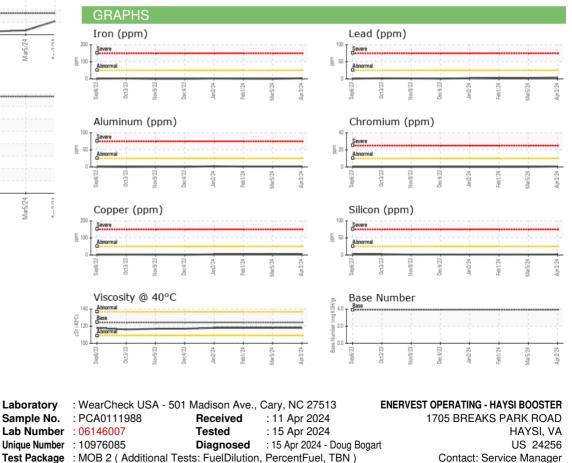

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ENEHAYBOO [WUSCAR] 06146007 (Generated: 04/15/2024 15:46:20) Rev: 3

Certificate 12367

Laboratory

Sample No.

Contact/Location: Service Manager - ENEHAYBOO

T:

F: