


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

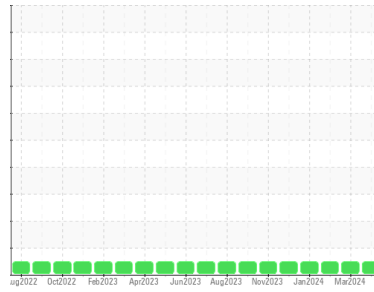

Machine Id  
**Hurricane Creek 1**

Component  
**Compressor**

Fluid  
**PETRO CANADA SENTRON LD 3000 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the component.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0111997</b>	PCA0112004	PCA0091335
Sample Date	Client Info		<b>02 Apr 2024</b>	04 Mar 2024	06 Feb 2024
Machine Age	hrs	Client Info	<b>132091</b>	131398	130744
Oil Age	hrs	Client Info	<b>21941</b>	21248	20594
Oil Changed		Client Info	<b>Not Changed</b>	Not Changd	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>1</b>	0	0
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	1	<1
Lead	ppm	ASTM D5185m >25	<b>1</b>	0	<1
Copper	ppm	ASTM D5185m >50	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>1</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 2	<b>2</b>	0	0
Manganese	ppm	ASTM D5185m 1	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 5	<b>7</b>	9	9
Calcium	ppm	ASTM D5185m 1220	<b>1222</b>	1184	1164
Phosphorus	ppm	ASTM D5185m 298	<b>291</b>	267	279
Zinc	ppm	ASTM D5185m 350	<b>325</b>	330	320
Sulfur	ppm	ASTM D5185m 1995	<b>2605</b>	2236	2241





### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>1</b>	1	1
Sodium	ppm	ASTM D5185m	<b>0</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	1

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.86	<b>0.59</b>	0.614	0.539

# OIL ANALYSIS REPORT





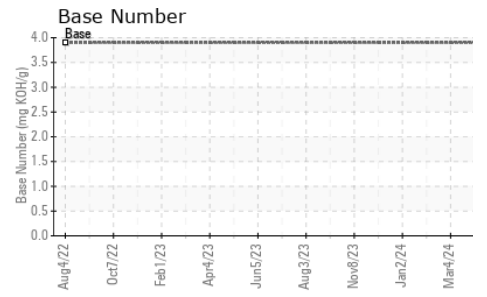
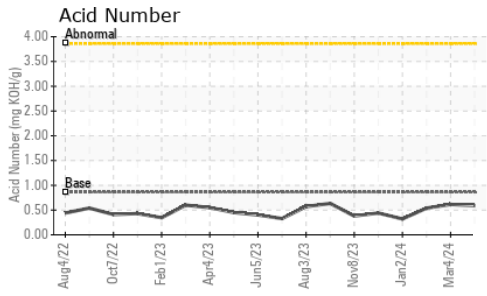
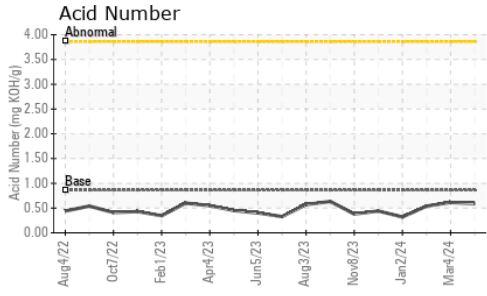
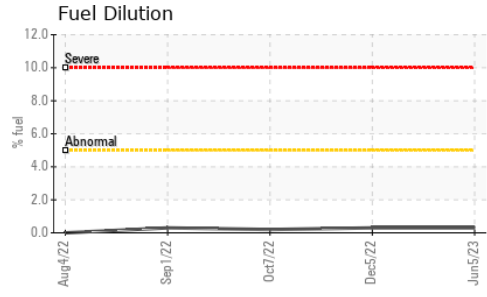


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	124.3	117	118

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

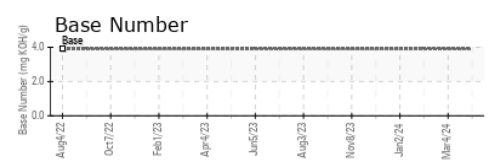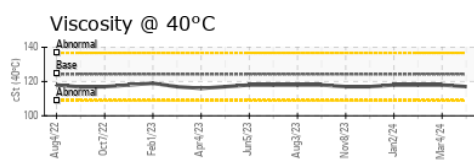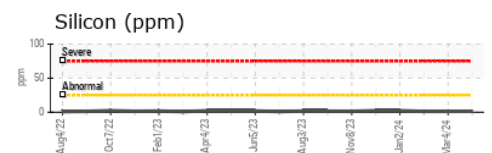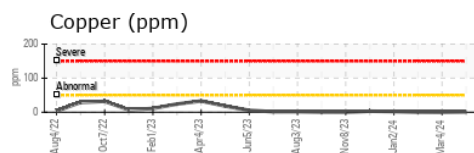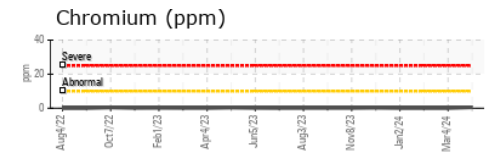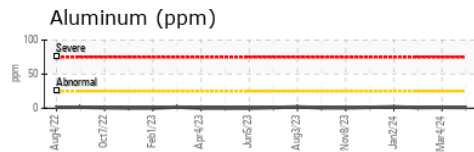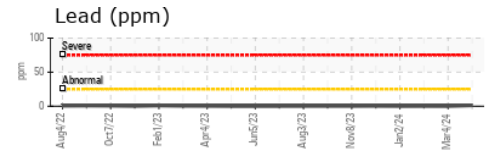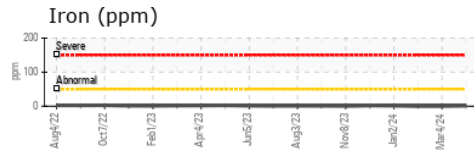

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0111997  
**Lab Number** : 06146011  
**Unique Number** : 10976089  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel, TBN )

**ENERVEST OPERATING - HURRICANE**  
 2830 LAUREL BRANCH ROAD  
 VANSANT, VA  
 US 24656  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: