




# OIL ANALYSIS REPORT

Sample Rating Trend

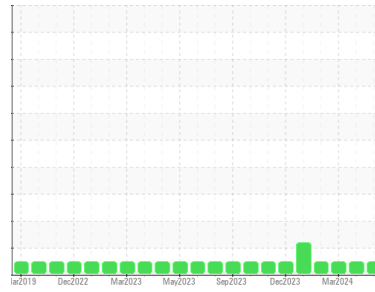

**NORMAL**



Machine Id  
**927081-260333**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0118176</b>	GFL0109138	GFL0109186
Sample Date	Client Info		<b>08 Apr 2024</b>	14 Mar 2024	01 Mar 2024
Machine Age	hrs	Client Info	<b>19557</b>	19441	19241
Oil Age	hrs	Client Info	<b>300</b>	150	700
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>19</b>	12	46
Chromium	ppm	ASTM D5185m >20	<b>1</b>	0	3
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	2	7
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	1
Copper	ppm	ASTM D5185m >330	<b>0</b>	0	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	2	28
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>55</b>	58	58
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>903</b>	959	586
Calcium	ppm	ASTM D5185m 1070	<b>1093</b>	1152	1397
Phosphorus	ppm	ASTM D5185m 1150	<b>1027</b>	1066	782
Zinc	ppm	ASTM D5185m 1270	<b>1256</b>	1287	909
Sulfur	ppm	ASTM D5185m 2060	<b>3535</b>	3707	2804

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	7
Sodium	ppm	ASTM D5185m	<b>8</b>	3	8
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	0.5	1.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.6</b>	7.3	12.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.1</b>	19.2	23.5


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	14.7	23.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.5</b>	8.3	7.6




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

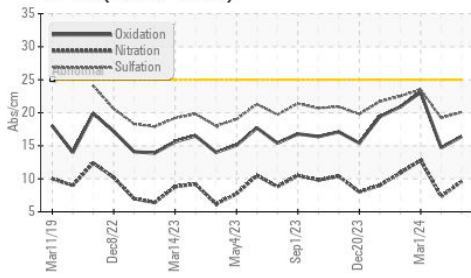

Base Number

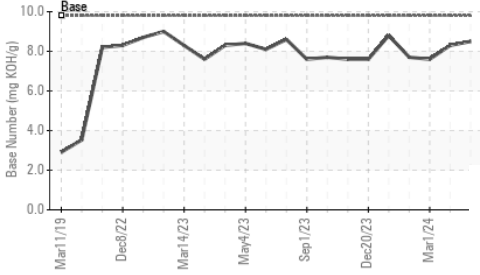

Viscosity @ 100°C

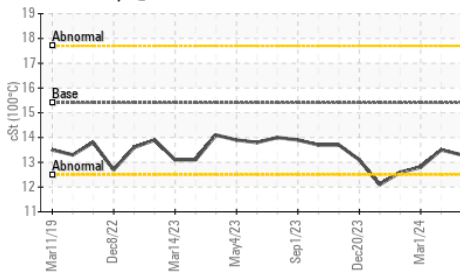


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	13.5

## GRAPHS


Ferrous Alloys

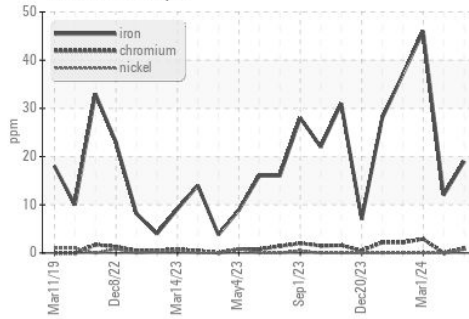


Non-ferrous Metals

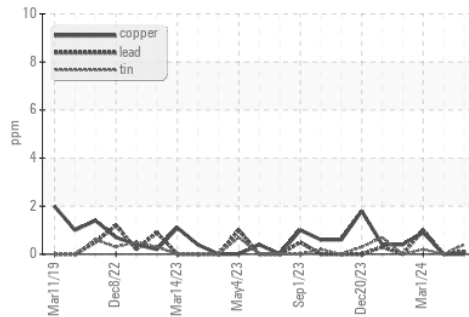

Viscosity @ 100°C

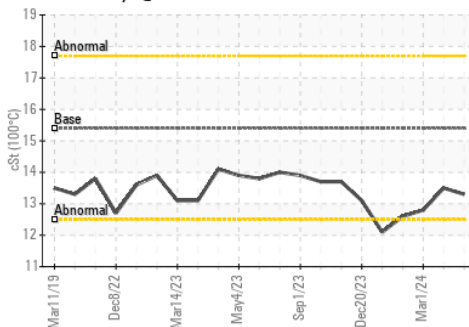

Base Number

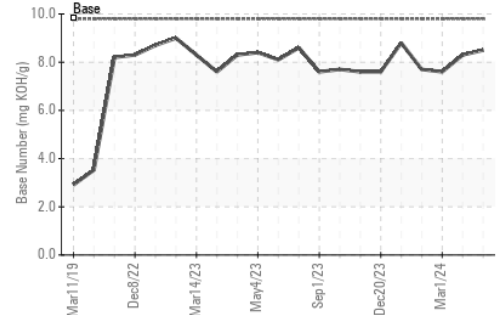

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0118176  
 Lab Number : 06146330  
 Unique Number : 10976408  
 Test Package : FLEET

Received : 11 Apr 2024  
 Tested : 12 Apr 2024  
 Diagnosed : 12 Apr 2024 - Wes Davis

GFL Environmental - 822 - Springfield Hauling  
 2120 West Bennett Street  
 Springfield, MO  
 US 65807

Contact: Dennis Moore  
 dennis.moore@gflenv.com  
 T: (417)403-3641

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: