




PROBLEM SUMMARY

Machine Id
20
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON UHP 5W40 (--- GAL)

Sample Rating Trend

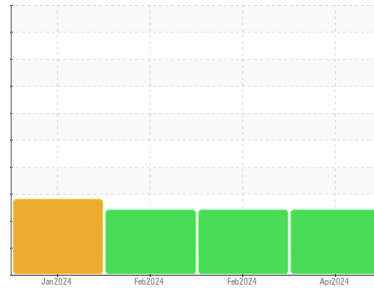

COMPONENT CONDITION SUMMARY

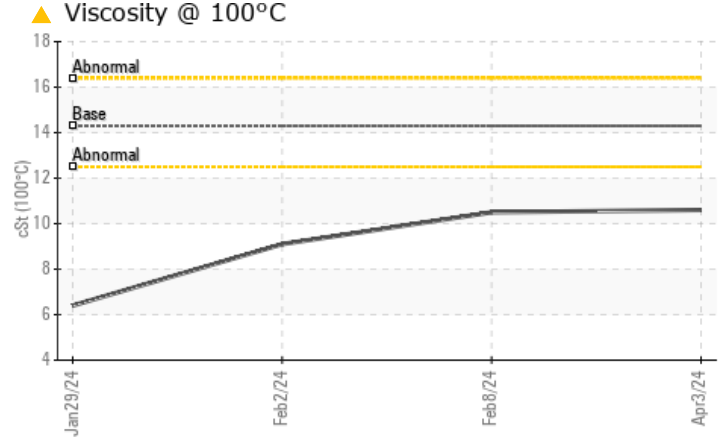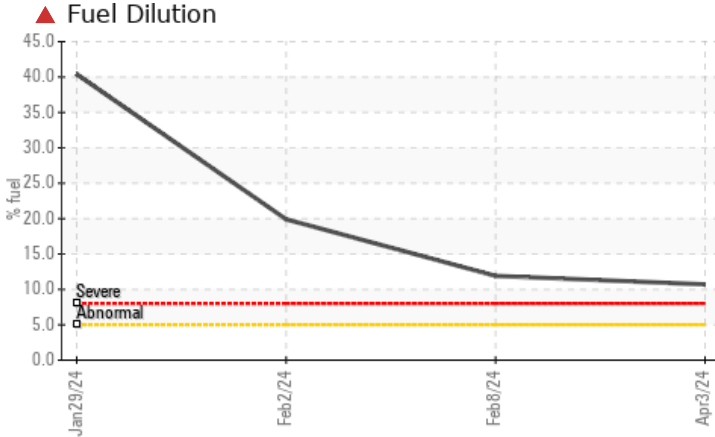

RECOMMENDATION

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Fuel	%	ASTM D3524	>5	▲ 10.7	▲ 11.9	▲ 19.9
Visc @ 100°C	cSt	ASTM D445	14.3	▲ 10.6	▲ 10.5	▲ 9.1

Customer Id: PETFAI
 Sample No.: PCA0099446
 Lab Number: 06146409
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

FUEL



08 Feb 2024 Diag: Jonathan Hester

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



FUEL



02 Feb 2024 Diag: Jonathan Hester

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



FUEL



29 Jan 2024 Diag: Don Baldrige


We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. No visible metal detected. There is a severe level of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

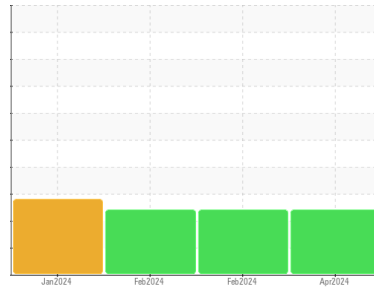

FUEL



Machine Id

20

Component

Diesel Engine

Fluid

PETRO CANADA DURON UHP 5W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0099446	PCA0099449	PCA0099443
Sample Date	Client Info		03 Apr 2024	08 Feb 2024	02 Feb 2024
Machine Age	mls	Client Info	588555	586535	583889
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			SEVERE	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	10	23	61
Chromium	ppm	ASTM D5185m	>20	0	0	1
Nickel	ppm	ASTM D5185m	>4	<1	1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	2
Lead	ppm	ASTM D5185m	>40	<1	<1	6
Copper	ppm	ASTM D5185m	>330	0	2	13
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	65	53	49	43
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	65	43	42	37
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	1160	940	921	838
Calcium	ppm	ASTM D5185m	820	822	825	855
Phosphorus	ppm	ASTM D5185m	1160	951	916	793
Zinc	ppm	ASTM D5185m	1260	1137	1124	990
Sulfur	ppm	ASTM D5185m	3000	3719	3634	2490

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	4	5	7
Sodium	ppm	ASTM D5185m		4	5	8
Potassium	ppm	ASTM D5185m	>20	2	2	2
Fuel	%	ASTM D3524	>5	▲ 10.7	▲ 11.9	▲ 19.9





INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.2	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	7.2	7.9	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	19.5	20.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	16.3	18.4
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	8.9	8.6	6.6





OIL ANALYSIS REPORT

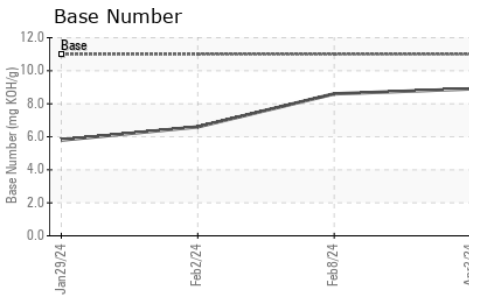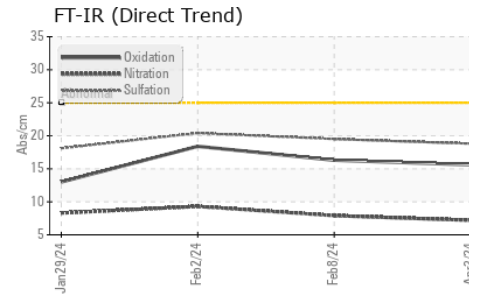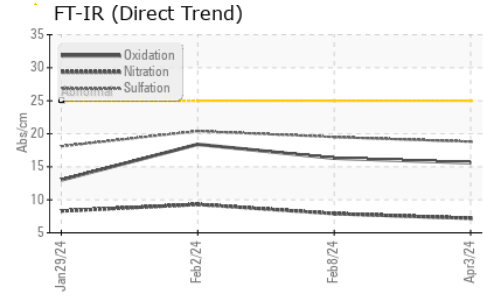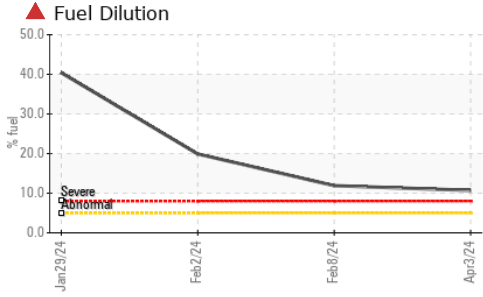

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.3	▲ 10.6	▲ 10.5

GRAPHS

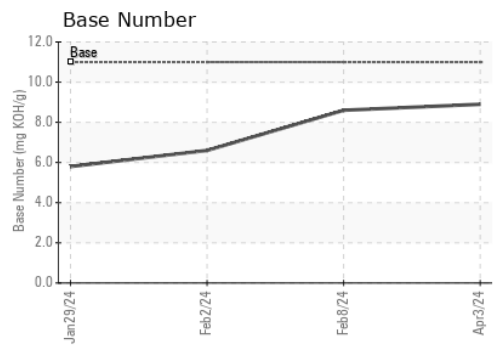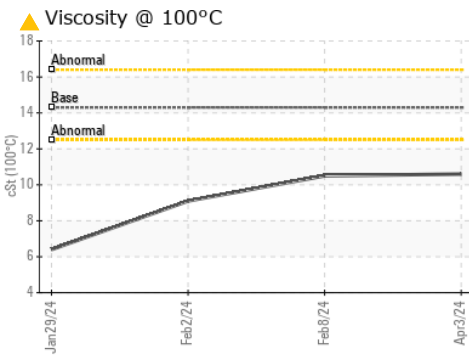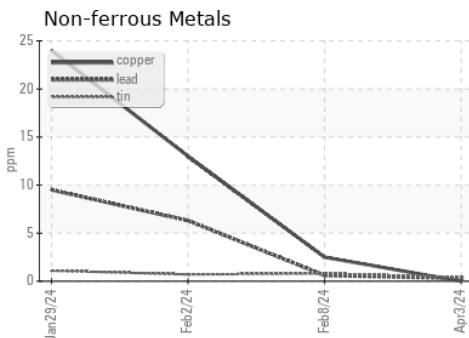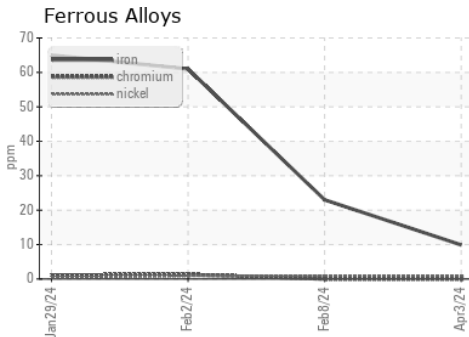

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0099446 **Received** : 11 Apr 2024
Lab Number : 06146409 **Tested** : 17 Apr 2024
Unique Number : 10976487 **Diagnosed** : 17 Apr 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: PercentFuel)

PETROSTAR INC - FAIRBANKS
 418 ILLINOIS
 FAIRBANKS, AK
 US 99701
 Contact: PHIL SWAFFORD
 pswafford@petrostar.com
 T: (907)452-0671
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)