




OIL ANALYSIS REPORT

Sample Rating Trend

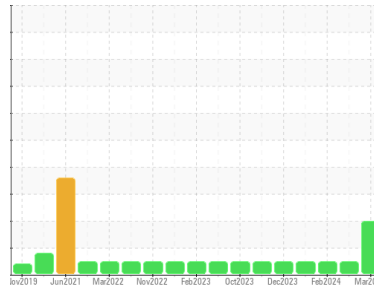

DEGRADATION



Machine Id
727068-361321
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Wear

All component wear rates are normal.

Contamination

There is an abnormal amount of solids and carbon present in the oil.

Fluid Condition

The BN level is low.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0109192	GFL0109180	GFL0109202
Sample Date	Client Info	30 Mar 2024	19 Feb 2024	06 Feb 2024
Machine Age	hrs	4655	4375	4226
Oil Age	hrs	700	700	600
Oil Changed	Client Info	Changed	Not Changd	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >120	49	25	0
Chromium	ppm	ASTM D5185m >20	<1	<1	0
Nickel	ppm	ASTM D5185m >5	<1	<1	0
Titanium	ppm	ASTM D5185m >2	0	<1	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	2	1
Lead	ppm	ASTM D5185m >40	2	<1	2
Copper	ppm	ASTM D5185m >330	0	2	<1
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	1	1	3
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	57	59	52
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	938	912	829
Calcium	ppm	ASTM D5185m 1070	1030	986	896
Phosphorus	ppm	ASTM D5185m 1150	1035	1020	902
Zinc	ppm	ASTM D5185m 1270	1257	1212	1109
Sulfur	ppm	ASTM D5185m 2060	3485	3064	2699

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	3	3	0
Sodium	ppm	ASTM D5185m	2	2	2
Potassium	ppm	ASTM D5185m >20	2	2	2
Fuel	%	ASTM D3524 >3.0	<1.0	<1.0	<1.0

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >4	▲ 5.3	2.6	0.2
Nitration	Abs/cm	*ASTM D7624 >20	11.0	7.3	6.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	27.6	22.3	17.7


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.1	13.7	13.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	▲ 0.0	7.8	8.1




OIL ANALYSIS REPORT


▲ FT-IR (Direct Trend)

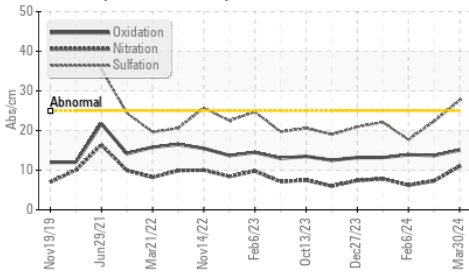


▲ Soot %

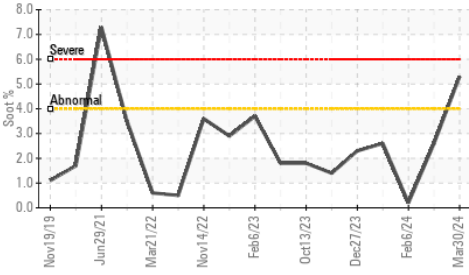


▲ Fuel Dilution

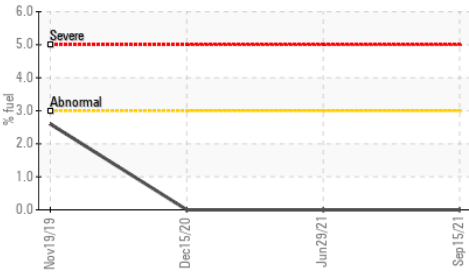

▲ Viscosity @ 100°C

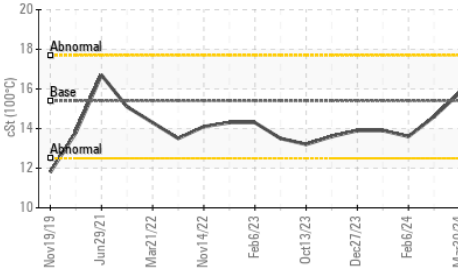

▲ Fuel Dilution

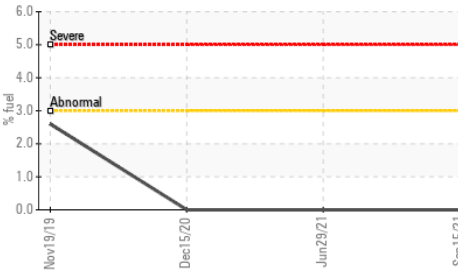


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	15.8	14.6

GRAPHS


▲ Ferrous Alloys

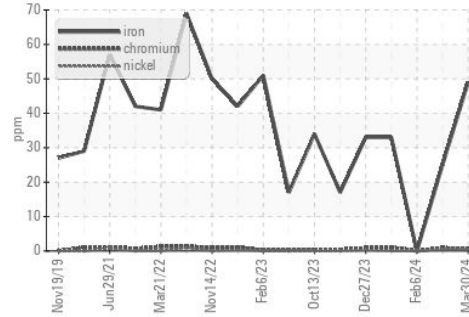


▲ Non-ferrous Metals

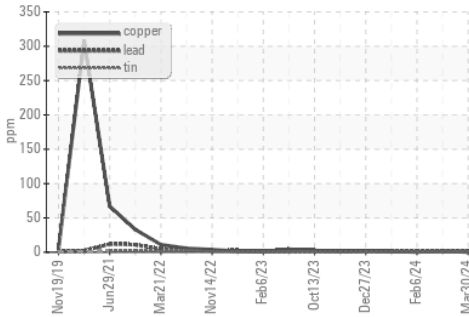

▲ Viscosity @ 100°C

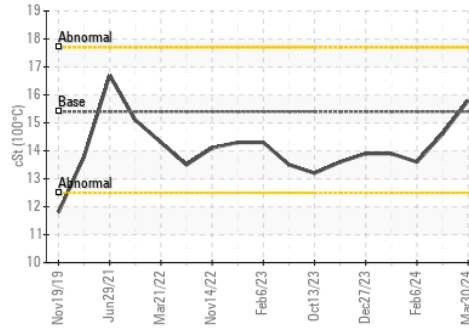

▲ Base Number

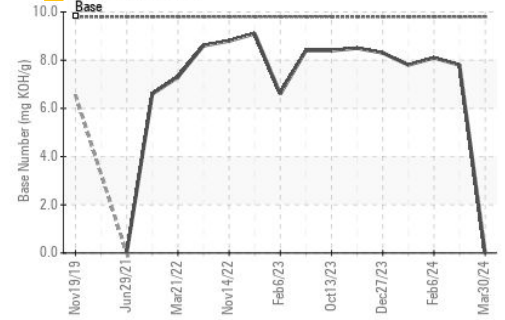

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL010912

Lab Number : 06146429

Unique Number : 10976507

Test Package : FLEET (Additional Tests : FuelDilution)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 11 Apr 2024

Tested : 15 Apr 2024

Diagnosed : 15 Apr 2024 - Don Baldrige

GFL Environmental - 822 - Springfield Hauling

2120 West Bennett Street

Springfield, MO

US 65807

Contact: Dennis Moore

dennis.moore@gflenv.com

T: (417)403-3641

F: