


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

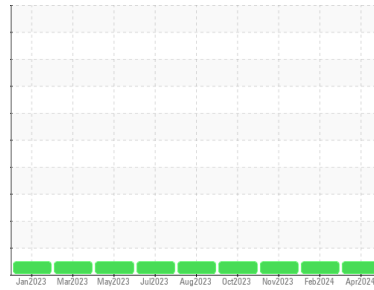

Area  
**(50947Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A63283**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0118745</b>	PCA0112813	PCA0112886
Sample Date	Client Info	<b>05 Apr 2024</b>	05 Feb 2024	29 Nov 2023
Machine Age	mls Client Info	<b>273740</b>	241083	209348
Oil Age	mls Client Info	<b>32657</b>	62954	31219
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>16</b>	28	14
Chromium	ppm ASTM D5185m >5	<b>2</b>	2	2
Nickel	ppm ASTM D5185m >2	<b>1</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	<1	<1
Aluminum	ppm ASTM D5185m >30	<b>5</b>	10	6
Lead	ppm ASTM D5185m >30	<b>1</b>	0	0
Copper	ppm ASTM D5185m >150	<b>7</b>	17	13
Tin	ppm ASTM D5185m >5	<b>1</b>	0	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>2</b>	<1	0
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	25	0
Molybdenum	ppm ASTM D5185m 50	<b>64</b>	66	67
Manganese	ppm ASTM D5185m 0	<b>1</b>	0	0
Magnesium	ppm ASTM D5185m 950	<b>871</b>	925	1000
Calcium	ppm ASTM D5185m 1050	<b>1072</b>	1097	1170
Phosphorus	ppm ASTM D5185m 995	<b>989</b>	1018	1096
Zinc	ppm ASTM D5185m 1180	<b>1101</b>	1164	1281
Sulfur	ppm ASTM D5185m 2600	<b>2729</b>	2716	2641

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>5</b>	6	5
Sodium	ppm ASTM D5185m	<b>2</b>	0	0
Potassium	ppm ASTM D5185m >20	<b>11</b>	27	16




### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	0.7	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>7.7</b>	8.8	7.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.0</b>	20.9	18.9

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.1</b>	17.2	15.0
Base Number (BN)	mg KOH/g ASTM D2896	<b>7.8</b>	6.5	8.1





# OIL ANALYSIS REPORT

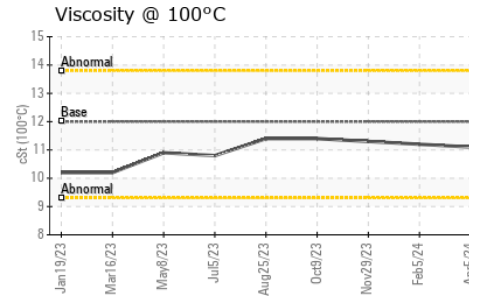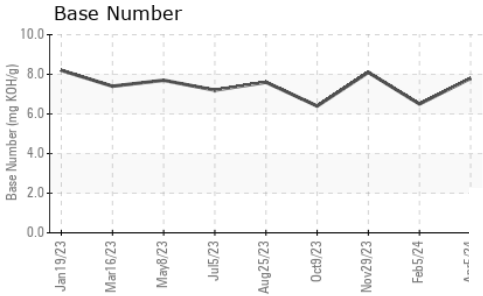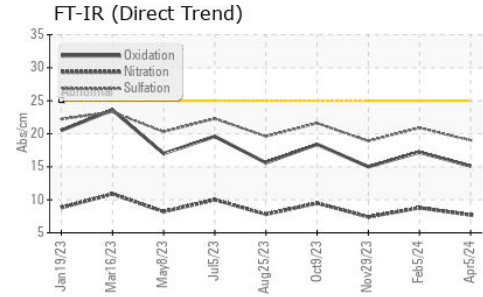

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.1	11.2

## GRAPHS

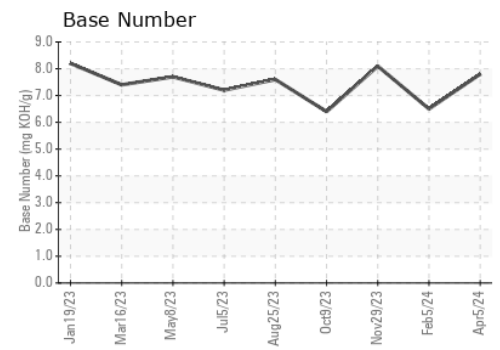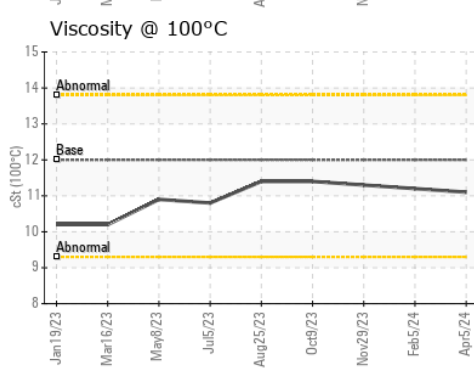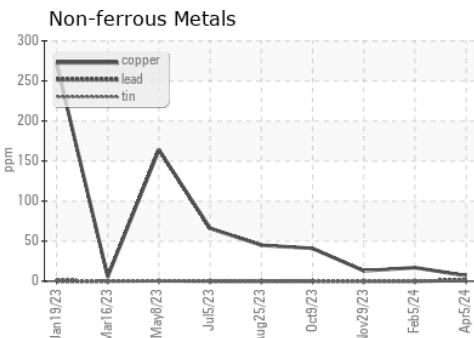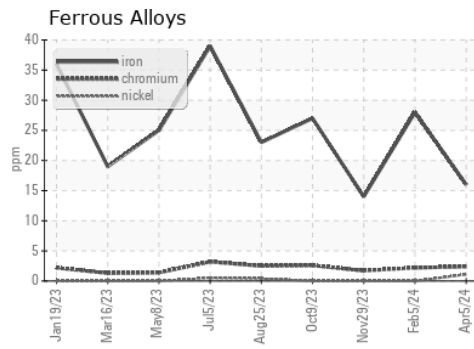

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0118745      **Received** : 12 Apr 2024  
**Lab Number** : 06146858      **Tested** : 15 Apr 2024  
**Unique Number** : 10976936      **Diagnosed** : 15 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1364 - Berkeley-Mt. Vernon**  
 5100 Lake Terrace NE  
 Mt. Vernon, IL  
 US 62864  
 Contact: Erien White  
 ewhite@transervice.com  
 T: (618)244-8726  
 F: (618)244-8791

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)