


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

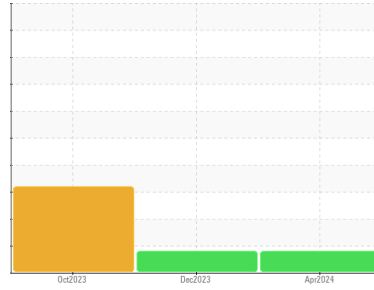

Machine Id
2227085 (S/N N643768)
 Component
Diesel Engine
 Fluid
 {not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Exhaust valve wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0116271	PCA0112324	PCA0108156
Sample Date	Client Info			11 Apr 2024	16 Dec 2023	23 Oct 2023
Machine Age	hrs	Client Info		0	0	18843
Oil Age	hrs	Client Info		0	0	18843
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	24	17	26
Chromium	ppm	ASTM D5185m	>20	2	<1	<1
Nickel	ppm	ASTM D5185m	>4	▲ 7	▲ 6	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	<1	5	▲ 20
Aluminum	ppm	ASTM D5185m	>20	6	11	● 29
Lead	ppm	ASTM D5185m	>40	2	0	0
Copper	ppm	ASTM D5185m	>330	194	312	84
Tin	ppm	ASTM D5185m	>15	3	3	4
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		3	20	216
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		66	67	113
Manganese	ppm	ASTM D5185m		2	2	3
Magnesium	ppm	ASTM D5185m		832	864	636
Calcium	ppm	ASTM D5185m		1157	1068	1361
Phosphorus	ppm	ASTM D5185m		967	924	550
Zinc	ppm	ASTM D5185m		1094	1138	794
Sulfur	ppm	ASTM D5185m		2253	2604	2195

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	10	15	▲ 59
Sodium	ppm	ASTM D5185m		<1	0	4
Potassium	ppm	ASTM D5185m	>20	17	18	75
Fuel	%	ASTM D3524	>5	<1.0	0.3	0.3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	10.0	8.1	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	19.4	24.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.6	16.1	22.1
Base Number (BN)	mg KOH/g	ASTM D2896		5.1	6.9	7.8





OIL ANALYSIS REPORT

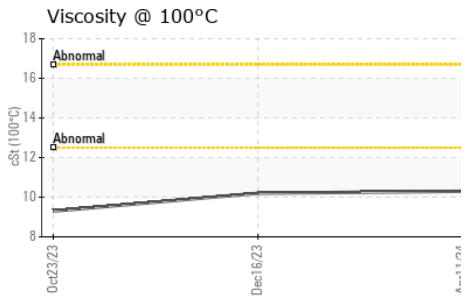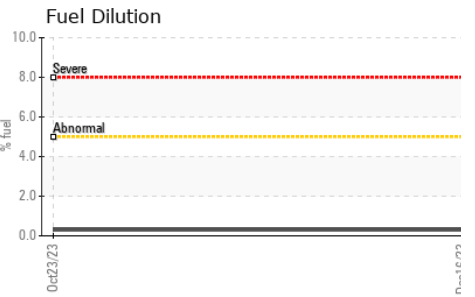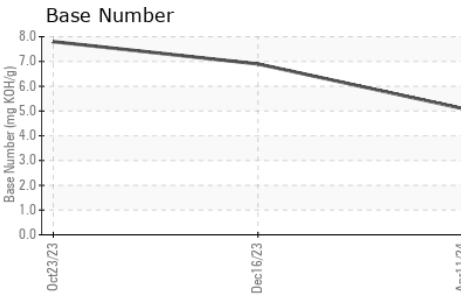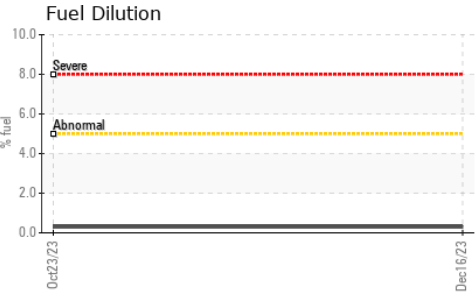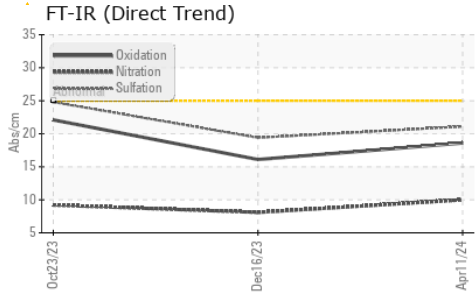

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.3	10.2	9.3

GRAPHS

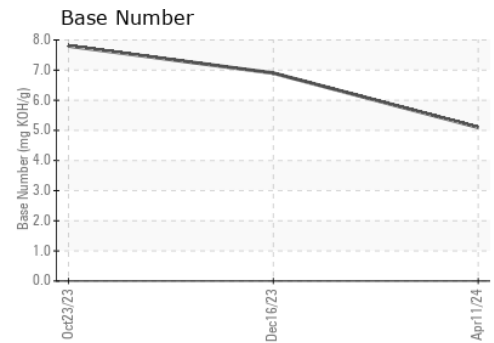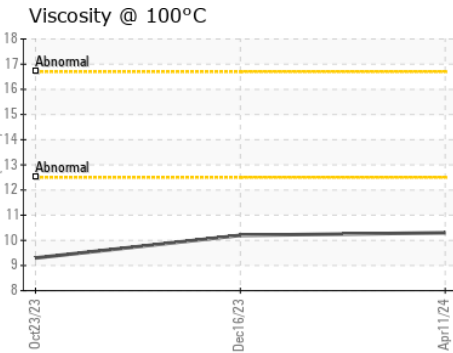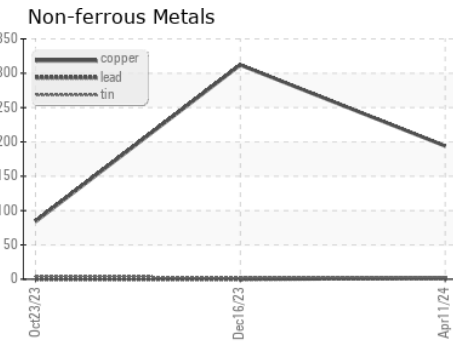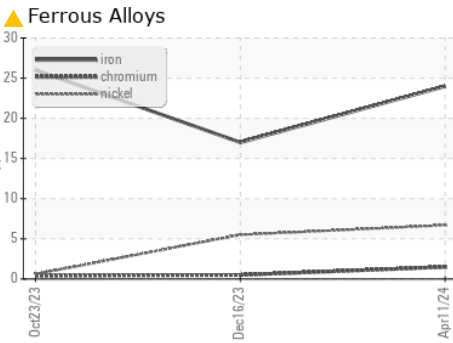

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116271 **Received** : 12 Apr 2024
Lab Number : 06146877 **Tested** : 15 Apr 2024
Unique Number : 10976955 **Diagnosed** : 15 Apr 2024 - Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution)

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)