


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

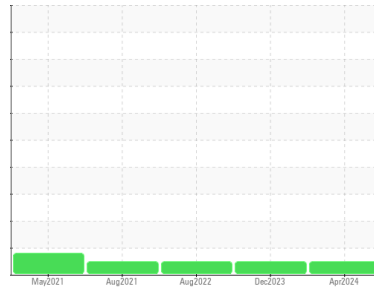

Machine Id  
**2026856**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0116262</b>	PCA0112333	PCA0079910
Sample Date	Client Info			<b>11 Apr 2024</b>	12 Dec 2023	16 Aug 2022
Machine Age	mls	Client Info		<b>0</b>	100903	100903
Oil Age	mls	Client Info		<b>0</b>	100903	100903
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>42</b>	44	29
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>2</b>	1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	4	3
Lead	ppm	ASTM D5185m	>40	<b>3</b>	2	1
Copper	ppm	ASTM D5185m	>330	<b>8</b>	6	15
Tin	ppm	ASTM D5185m	>15	<b>2</b>	1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>6</b>	0	1
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>64</b>	58	61
Manganese	ppm	ASTM D5185m		<b>2</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>778</b>	907	841
Calcium	ppm	ASTM D5185m		<b>1081</b>	1002	1090
Phosphorus	ppm	ASTM D5185m		<b>910</b>	942	890
Zinc	ppm	ASTM D5185m		<b>1059</b>	1217	1170
Sulfur	ppm	ASTM D5185m		<b>2693</b>	2670	2836

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	7	4
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	1
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	0	4
Fuel	%	ASTM D3524	>5	<b>&lt;1.0</b>	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.0</b>	11.5	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	23.0	21.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.5</b>	20.6	17.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>4.5</b>	4.4	7.4





# OIL ANALYSIS REPORT

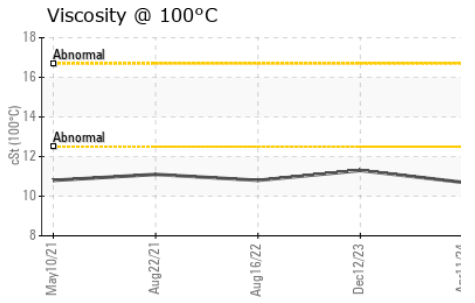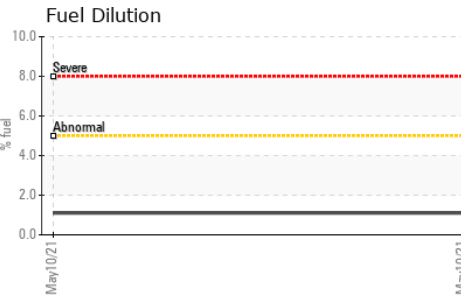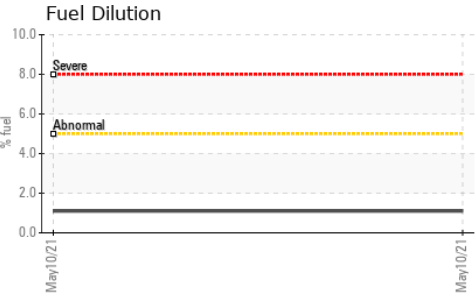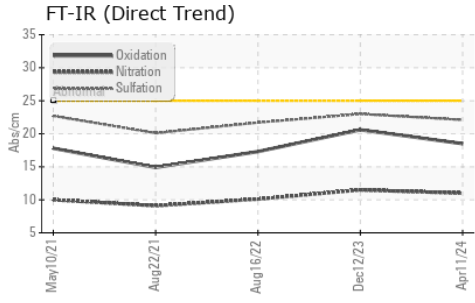

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.7	11.3	10.8

## GRAPHS

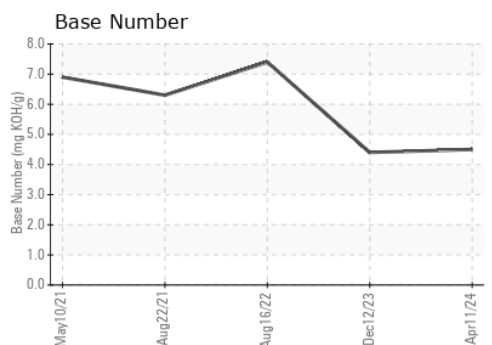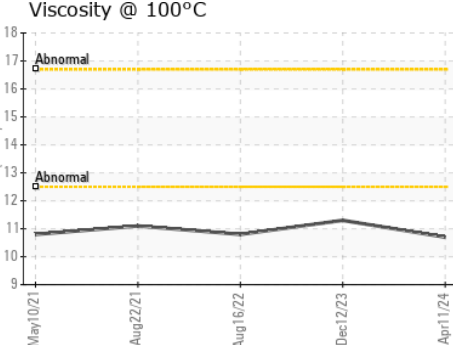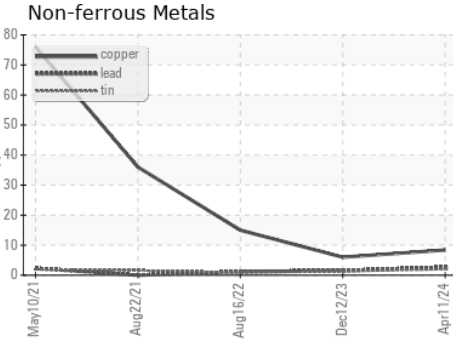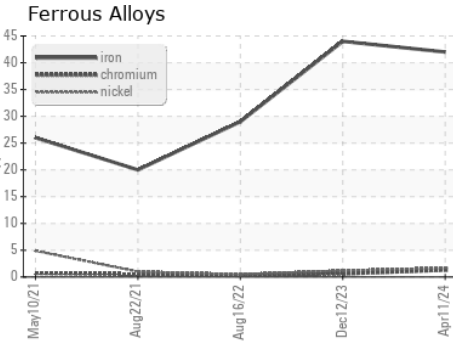

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116262 **Received** : 12 Apr 2024  
**Lab Number** : 06146879 **Tested** : 15 Apr 2024  
**Unique Number** : 10976957 **Diagnosed** : 15 Apr 2024 - Sean Felton  
**Test Package** : FLEET ( Additional Tests : FuelDilution )

**PERDUE FARMS - DILLON**  
 2047 HWY 9 WEST  
 DILLON, SC  
 US 29536  
 Contact: JOHNNY WILKINS  
 johnny.wilkins@perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (843)841-8070